

**QNX[®] Neutrino[®] Realtime
Operating System**

Audio Developer's Guide

For QNX[®] Neutrino[®] 6.3

Printed under license by:

QNX Software Systems Co.
175 Terence Matthews Crescent
Kanata, Ontario
K2M 1W8
Canada
Voice: +1 613 591-0931
Fax: +1 613 591-3579
Email: info@qnx.com
Web: <http://www.qnx.com/>

© 2000 – 2005, QNX Software Systems. All rights reserved.

Third-Party copyright notices

All appropriate copyright notices for third-party software are published in this manual in an appendix called “Third-Party Copyright Notices.”

Publishing history

Electronic edition published 2005

Technical support options

To obtain technical support for any QNX product, visit the **Technical Support** section in the **Services** area on our website (www.qnx.com). You’ll find a wide range of support options, including our free web-based **Developer Support Center**.

QNX, Momentics, Neutrino, and Photon microGUI are registered trademarks of QNX Software Systems in certain jurisdictions. All other trademarks and trade names belong to their respective owners.

Contents

1	About This Guide	xi
	Typographical conventions	xiii
	Note to Windows users	xiv
	What you'll find in this guide	xv
	What's new in 6.1	xvi
	Changed content	xvi
	What's new in 6.2	xvi
	What's new in 6.3	xvi
2	Audio Architecture	1
	QNX Sound Architecture	3
	Cards and devices	3
	Control device	4
	Mixer devices	5
	Pulse Code Modulation (PCM) devices	5
	Data formats	6
	PCM state machine	7
	Software PCM mixing	8
	PCM plugin converters	9
3	Playing and Capturing Audio Data	11
	Handling PCM devices	13
	Opening your PCM device	13
	Configuring the PCM device	14

Preparing the PCM subchannel	16
Closing the PCM subchannel	17
Playing audio data	17
Playback states	17
Sending data to the PCM subchannel	19
If the PCM subchannel stops during playback	20
Stopping the playback	20
Synchronizing with the PCM subchannel	21
Capturing audio data	22
Selecting what to capture	22
Capture states	22
Receiving data from the PCM subchannel	24
If the PCM subchannel stops during capture	25
Stopping the capture	25
Synchronizing with the PCM subchannel	26
4 Mixer Architecture	27
Opening the mixer device	31
Controlling a mixer group	32
The best mixer group with respect to your PCM subchannel	33
Finding all mixer groups	34
Mixer event notification	35
Closing the mixer device	36
5 Audio Library	37
<i>snd_card_get_longname()</i>	40
<i>snd_card_get_name()</i>	42
<i>snd_card_name()</i>	44
<i>snd_cards()</i>	46
<i>snd_cards_list()</i>	48
snd_ctl_callbacks_t	50
<i>snd_ctl_close()</i>	52
<i>snd_ctl_file_descriptor()</i>	54

<i>snd_ctl_hw_info()</i>	56
snd_ctl_hw_info_t	58
<i>snd_ctl_mixer_switch_list()</i>	60
<i>snd_ctl_mixer_switch_read()</i>	62
<i>snd_ctl_mixer_switch_write()</i>	64
<i>snd_ctl_open()</i>	66
<i>snd_ctl_pcm_channel_info()</i>	68
<i>snd_ctl_pcm_info()</i>	70
<i>snd_ctl_read()</i>	72
snd_mixer_callbacks_t	74
<i>snd_mixer_close()</i>	78
snd_mixer_eid_t	80
<i>snd_mixer_element_read()</i>	81
snd_mixer_element_t	83
<i>snd_mixer_element_write()</i>	85
<i>snd_mixer_elements()</i>	87
snd_mixer_elements_t	90
<i>snd_mixer_file_descriptor()</i>	92
snd_mixer_filter_t	94
<i>snd_mixer_get_bit()</i>	96
<i>snd_mixer_get_filter()</i>	98
snd_mixer_gid_t	100
<i>snd_mixer_group_read()</i>	101
snd_mixer_group_t	103
<i>snd_mixer_group_write()</i>	107
<i>snd_mixer_groups()</i>	109
snd_mixer_groups_t	111
<i>snd_mixer_info()</i>	113
snd_mixer_info_t	115
<i>snd_mixer_open()</i>	117
<i>snd_mixer_read()</i>	119
<i>snd_mixer_routes()</i>	121

snd_mixer_routes_t	123
<i>snd_mixer_set_bit()</i>	125
<i>snd_mixer_set_filter()</i>	127
<i>snd_mixer_sort_eid_table()</i>	129
<i>snd_mixer_sort_gid_table()</i>	131
snd_mixer_weight_entry_t	133
<i>snd_pcm_build_linear_format()</i>	134
<i>snd_pcm_capture_flush()</i>	136
<i>snd_pcm_capture_prepare()</i>	138
<i>snd_pcm_channel_flush()</i>	140
<i>snd_pcm_channel_info()</i>	142
snd_pcm_channel_info_t	144
<i>snd_pcm_channel_params()</i>	148
snd_pcm_channel_params_t	150
<i>snd_pcm_channel_prepare()</i>	153
<i>snd_pcm_channel_setup()</i>	155
snd_pcm_channel_setup_t	157
<i>snd_pcm_channel_status()</i>	160
snd_pcm_channel_status_t	162
<i>snd_pcm_close()</i>	166
<i>snd_pcm_file_descriptor()</i>	168
<i>snd_pcm_find()</i>	170
<i>snd_pcm_format_big_endian()</i>	173
<i>snd_pcm_format_linear()</i>	175
<i>snd_pcm_format_little_endian()</i>	177
<i>snd_pcm_format_signed()</i>	179
<i>snd_pcm_format_size()</i>	181
snd_pcm_format_t	183
<i>snd_pcm_format_unsigned()</i>	185
<i>snd_pcm_format_width()</i>	187
<i>snd_pcm_get_format_name()</i>	189
<i>snd_pcm_info()</i>	193

<code>snd_pcm_info_t</code>	195
<code>snd_pcm_nonblock_mode()</code>	197
<code>snd_pcm_open()</code>	199
<code>snd_pcm_open_preferred()</code>	202
<code>snd_pcm_playback_drain()</code>	206
<code>snd_pcm_playback_flush()</code>	208
<code>snd_pcm_playback_prepare()</code>	210
<code>snd_pcm_plugin_flush()</code>	212
<code>snd_pcm_plugin_info()</code>	215
<code>snd_pcm_plugin_params()</code>	217
<code>snd_pcm_plugin_playback_drain()</code>	219
<code>snd_pcm_plugin_prepare()</code>	221
<code>snd_pcm_plugin_read()</code>	224
<code>snd_pcm_plugin_set_disable()</code>	227
<code>snd_pcm_plugin_setup()</code>	229
<code>snd_pcm_plugin_status()</code>	231
<code>snd_pcm_plugin_write()</code>	233
<code>snd_pcm_read()</code>	236
<code>snd_pcm_write()</code>	238
<code>snd_strerror()</code>	241
<code>snd_switch_t</code>	243
A	wave.c example 247
B	waverec.c example 259
C	mixer_ctl.c example 271
D	LGPL License Agreement 285
	LGPL License Agreement 287
	Glossary 289

Index 293

List of Figures

Cards and devices.	4
General state diagram for PCM devices.	8
State diagram for PCM devices during playback.	18
State diagram for PCM devices during capture.	23
A simple sound card mixer.	30



Chapter 1

About This Guide

In this chapter...

Typographical conventions	xiii
What you'll find in this guide	xv
What's new in 6.1	xvi
What's new in 6.2	xvi
What's new in 6.3	xvi



Typographical conventions

Throughout this manual, we use certain typographical conventions to distinguish technical terms. In general, the conventions we use conform to those found in IEEE POSIX publications. The following table summarizes our conventions:

Reference	Example
Code examples	<code>if(stream == NULL)</code>
Command options	<code>-lR</code>
Commands	<code>make</code>
Environment variables	<code>PATH</code>
File and pathnames	<code>/dev/null</code>
Function names	<code>exit()</code>
Keyboard chords	Ctrl – Alt – Delete
Keyboard input	<code>something you type</code>
Keyboard keys	Enter
Program output	<code>login:</code>
Programming constants	<code>NULL</code>
Programming data types	<code>unsigned short</code>
Programming literals	<code>0xFF, "message string"</code>
Variable names	<code>stdin</code>
User-interface components	<code>Cancel</code>

We format single-step instructions like this:

- ▶ To reload the current page, press Ctrl – R.

We use an arrow (→) in directions for accessing menu items, like this:

You'll find the **Other...** menu item under **Perspective**→**Show View**.

We use notes, cautions, and warnings to highlight important messages:



Notes point out something important or useful.



CAUTION: Cautions tell you about commands or procedures that may have unwanted or undesirable side effects.



WARNING: Warnings tell you about commands or procedures that could be dangerous to your files, your hardware, or even yourself.

Note to Windows users

In our documentation, we use a forward slash (/) as a delimiter in *all* pathnames, including those pointing to Windows files.

We also generally follow POSIX/UNIX filesystem conventions.

What you'll find in this guide

The *Audio Developer's Guide* is intended for developers who wish to write audio applications using the QNX Sound Architecture (QSA) drivers and library.

This table may help you find what you need in this guide:

To find out about:	Go to:
The structure of an audio application	Audio Architecture
Playing and recording sound	Playing and Capturing Audio Data
The structure of a mixer	Mixer Architecture
Audio library functions	Audio Library
How to code a <code>.wav</code> player in C	<code>wave.c</code> example
How to code a <code>.wav</code> recorder in C	<code>waverec.c</code> example
How to code a <code>mix_ctl</code> in C	<code>mix_ctl.c</code> example
Why <code>libasound.a</code> isn't offered	LGPL License Agreement
Terms used in this guide	Glossary



You should have already installed QNX Neutrino and become familiar with its architecture. For a detailed overview, see the *System Architecture* guide.

The key components of the QNX Audio driver architecture include:

io-audio Audio system manager.

deva-ctrl-*.so drivers

Audio drivers. For example, the audio driver for the Ensoniq Audio PCI cards is

deva-ctrl-audiopci.so. For more information, see “Audio drivers (**deva-***)” in the Utilities Summary chapter of the QNX Neutrino *Utilities Reference*.

libasound.so

Programmer interface library.

<asound.h>, **<asoundlib.h>**

Header files in **/usr/include/sys/**.

What's new in 6.1

Changed content

snd_pcm_channel_info()

Removed the SND_PCM_CHNINFO_BATCH flag because it was deprecated in the source code.

What's new in 6.2

The QNX Sound Architecture has evolved away from ALSA. You should reread this entire guide.

What's new in 6.3

Three function calls, a structure, and a **<mix_ctl.c>** example were added:

- *snd_ctl_mixer_switch_list()*
- *snd_ctl_mixer_switch_read()*
- *snd_ctl_mixer_switch_write()*

- `snd_switch_t`
- `<mix_ctl.c>`



Chapter 2

Audio Architecture

In this chapter...

QNX Sound Architecture	3
Cards and devices	3
Control device	4
Mixer devices	5
Pulse Code Modulation (PCM) devices	5



QNX Sound Architecture

In order for an application to produce sound, the system must have:


- hardware in the form of a sound card or sound chip
- a device driver for the hardware
- a well-defined way for the application to talk to the driver, in the form of an Application Programming Interface (API).

This whole system is referred to as the *QNX Sound Architecture (QSA)*. QSA has a rich heritage and owes a large part of its design to version 0.5.2 of the Advanced Linux Sound Architecture (ALSA), but as both systems continued to develop and expand, direct compatibility between the two was lost.

This document concentrates on defining the API and providing examples of how to use it. But before defining the API calls themselves, you need a little background on the architecture itself. For those who want to jump in right away, full source for examples of a “wav” player and “wav” recorder are included in the appendix.

Cards and devices

The basic piece of hardware needed to produce or capture (i.e. record) sound is an audio chip or sound card, referred to simply as a *card*. QSA can support more than one card at a time, and can even mount and unmount cards “on the fly” (more about this later). All the sound devices are attached to a card, so in order to reach a device, you must first know what card it’s attached to.

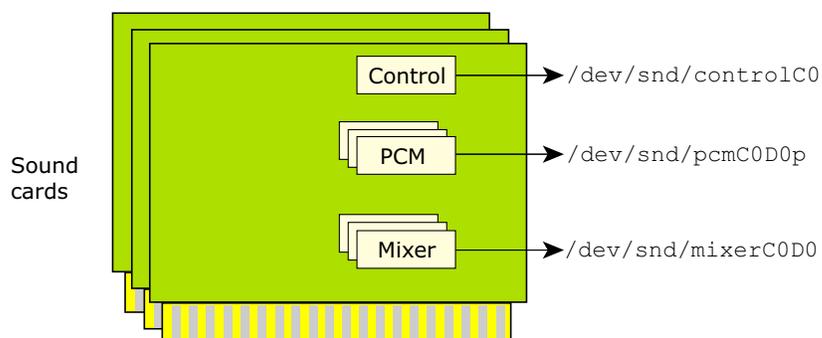

Cards and devices.

The devices include:

- Control
- Mixer
- Pulse Code Modulation (PCM)

You can list the devices that are on your system by typing:

```
ls /dev/snd
```

The resulting list includes one control device for every sound card, starting from card 0, as well as the PCM and mixer devices for each card.

Control device

There's one control device for each sound card in the system. This device is special because it doesn't directly control any real hardware. It's a concentration point for information about its card and the other devices attached to its card. The primary information kept by the control device includes the type and number of additional devices attached to the card.

Mixer devices

Mixer devices are responsible for combining or mixing the various analog signals on the sound card. A mixer may also provide a series of controls for selecting which signals are mixed and how they're mixed together, adjusting the gain or attenuation of signals, and/or the muting of signals.

For more information, see the Mixer Architecture chapter.

Pulse Code Modulation (PCM) devices

PCM devices are responsible for converting digital sound sequences to analog waveforms, or analog waveforms to digital sound sequences.

Each device operates only in one mode or the other. If it converts digital to analog, it's a *playback* channel device; if it converts analog to digital, it's a *capture* channel device.

The attributes of PCM devices include:

- the data formats that the device supports (16-bit signed little endian, 32-bit unsigned big endian, etc.) For more information, see “Data formats,” below.
- the data rates that the device can run at (48KHz, 44.1kHz etc.)
- the number of streams that the device can support (e.g. 2-channel stereo, mono, and 4-channel surround)
- the number of simultaneous clients that the device can support, referred to as the number of *subchannels* the device has. Most sound cards support only 1 subchannel, but some cards can support more; for example, the Soundblaster Live! supports 32 subchannels).

The maximum number of subchannels supported is a hardware limitation. On single-subchannel cards, this limitation is artificially surpassed through a software solution: the software subchannel mixer. This allows 8 software subchannels to exist on top of the single hardware subchannel.

The number of subchannels that a device advertises as supporting is defined for the best-case scenario; in the real world, the device might support fewer. For example, a device might support 32 simultaneous clients if they all run at 48 kHz, but might support only 8 clients if the rate is 44.1 kHz. In this case, the device advertises 32 subchannels.

Data formats

The QNX Sound Architecture supports a variety of data formats. The `<asound.h>` header file defines two sets of constants for the data formats. The two sets are related (and easily converted between) but serve different purposes:

SND_PCM_SFMT_*

A single selection from the set of data formats. For a list of the supported formats, see *snd_pcm_get_format_name()* in the Audio Library chapter.

SND_PCM_FMT_*

A group of (one or more) formats within a single variable. This is useful for specifying the format capabilities of a device, for example.

Generally, the `SND_PCM_FMT_*` constants are used to convey information about raw potential, and the `SND_PCM_SFMT_*` constants are used to select and report a specific configuration.

You can build a format from its width and other attributes, by calling *snd_pcm_build_linear_format()*.

You can use these functions to check the characteristics of a format:

- *snd_pcm_format_big_endian()*
- *snd_pcm_format_linear()*
- *snd_pcm_format_little_endian()*
- *snd_pcm_format_signed()*

- *snd_pcm_format_unsigned()*

PCM state machine

A PCM device is, at its simplest, a data buffer that's converted, one sample at a time, by either a Digital Analog Converter (DAC) or an Analog Digital Converter (ADC), depending on direction. This simple idea becomes a little more complicated in QSA because of the concept that the PCM subchannel is in a state at any given moment. These states are defined as follows:

SND_PCM_STATUS_NOTREADY

The initial state of the device.

SND_PCM_STATUS_READY

The device has its parameters set for the data it will operate on.

SND_PCM_STATUS_PREPARED

The device has been prepared for operation and is able to run.

SND_PCM_STATUS_RUNNING

The device is running, transferring data to or from the buffer.

SND_PCM_STATUS_UNDERRUN


This state happens only to a playback device and is entered when the buffer has no more data to be played.

SND_PCM_STATUS_OVERRUN

This state happens only to a capture device and is entered when the buffer has no room for data.

SND_PCM_STATUS_PAUSED

Not supported by QSA.

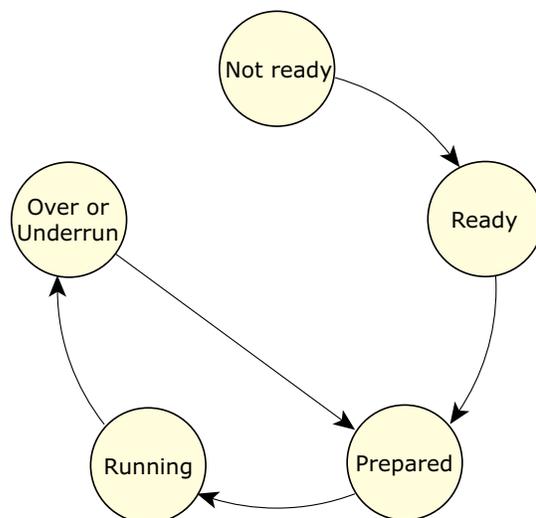

General state diagram for PCM devices.

The transition between states is the result of executing an API call, or the result of conditions that occur in the hardware. For more details, see the [Playing and Capturing Audio Data](#) chapter.

Software PCM mixing

In the case where the sound card has a playback PCM device with only one subchannel, the device driver writer can choose to include a PCM software mixing device. This device simply appears as a new PCM playback device that supports many subchannels, but it has a few differences from a true hardware device:

- The mixing of the PCM streams is done in software using the CPU. Even with only one stream, the CPU is used more than if the hardware device is used.
- When the PCM software mixer is started, it opens a connection to the real hardware device. If the real hardware device is already in use, the PCM software mixer can't run. Likewise, if the PCM

software mixer is running, the real hardware device is in use and is unavailable.

The PCM software mixer is specifically attached to a single hardware PCM device. This one-to-one mapping allows for an API call to identify the PCM software-mixing device associated with its hardware device.

PCM plugin converters

In some cases, an application has data in one form, and the PCM device is capable of accepting data only in another format. Clearly this won't work unless something is done. The application — like some MPG decoders — could reformat its data “on the fly” to a format that the device accepts. Alternatively, the application can ask QSA to do the conversion for it.

The conversation is accomplished by invoking a series of *plugin converters*, each capable of doing a very specific job. As an example, the rate converter converts a stream from one sampling frequency to another. There are plugin converters for bit conversions (8-to-16-bit, etc.), endian conversion (little endian to big endian and vice versa), channel conversions (stereo to mono, etc.) and so on.

The minimum number of converters is invoked to translate the input format to the output format so as to minimize CPU usage. An application signals its willingness to use the plugin converter interface by using the PCM plugin API functions. These API functions all have **plugin** in their names. For more information, see the Audio Library chapter.



Don't mix the plugin API functions with the nonplugin functions.



Chapter 3

Playing and Capturing Audio Data

In this chapter...

Handling PCM devices	13
Playing audio data	17
Capturing audio data	22



This chapter describes the major steps required to play back and capture (i.e. record) sound data.

Handling PCM devices

The software processes for playing back and capturing audio data are similar. This section describes the common steps:

- Opening your PCM device
- Configuring the PCM device
- Preparing the PCM subchannel
- Closing the PCM subchannel

Opening your PCM device

The first thing you need to do in order to playback or capture sound is open a connection to a PCM playback or capture device. The API calls for opening a PCM device are:

snd_pcm_open()

Use this call when you want to open a specific hardware device, and you know its card and device number.

snd_pcm_open_preferred()

Use this call to open the user's preferred device.

Using this function makes your application more flexible, because you don't need to know the card and device numbers; the function can pass back to you the card and device that it opened.

Both of these API calls set a PCM connection handle that you'll use as an argument to all other PCM API calls. This handle is very analogous to a file stream handle. It's a pointer to a `snd_pcm_t` structure, which is an opaque data type.

These functions, like others in the QSA API, work for both capture and playback channels. They take as an argument a *channel direction*, which is one of:

- SND_PCM_OPEN_CAPTURE
- SND_PCM_OPEN_PLAYBACK

This code fragment from the `wave.c` example in the appendix uses both functions to open a playback device:

```
if (card == -1)
{
    if ((rtn = snd_pcm_open_preferred (&pcm_handle,
                                     &card, &dev,
                                     SND_PCM_OPEN_PLAYBACK)) < 0)
        return err ("device open");
}
else
{
    if ((rtn = snd_pcm_open (&pcm_handle, card, dev,
                           SND_PCM_OPEN_PLAYBACK)) < 0)
        return err ("device open");
}
```

If the user specifies a card and a device number on the command line, this code opens a connection to that specific PCM playback device. If the user doesn't specify a card, the code creates a connection to the preferred PCM playback device, and `snd_pcm_open_preferred()` stores the card and device numbers in the given variables.

Configuring the PCM device

The next step in playing back or capturing the sound stream is to inform the device of the format of the data that you're about to send it or want to receive from it. You can do this by filling in a `snd_pcm_channel_params_t` structure, and then calling `snd_pcm_channel_params()` or `snd_pcm_plugin_params()`. The difference between the functions is that the second one uses the plugin converters (see "PCM plugin converters" in the Audio Architecture chapter) if required.

If the device can't support the data parameters you're setting, or if all the subchannels of the device are currently in use, both of these functions fail.

The API calls for determining the current capabilities of a PCM device are:

snd_pcm_plugin_info()

Use the plugin converters. If the hardware has a free subchannel, the capabilities returned are extensive because the plugin converters make any necessary conversion.

snd_pcm_channel_info()

Access the hardware directly. This function returns only what the hardware capabilities are.



Both of these functions take as an argument a pointer to a **snd_pcm_channel_info_t** structure. You must set the *channel* member of this structure to the desired direction (SND_PCM_CHANNEL_CAPTURE or SND_PCM_CHANNEL_PLAYBACK) *before* calling the functions. The functions fill in the other members of the structure.

It's the act of configuring the channel that allocates a subchannel to the client. Stated another way, hundreds of clients can open a handle to a PCM device with only one subchannel, but only one can configure it. After a client allocates a subchannel, it isn't returned to the free pool until the handle is closed. One result of this mechanism is that, from moment to moment, the capabilities of a PCM device change as other applications allocate and free subchannels. Additionally the act of configuring / allocating a subchannel changes its state from SND_PCM_STATUS_NOTREADY to SND_PCM_STATUS_READY.

If the API call succeeds, all parameters specified are accepted and are guaranteed to be in effect, except for the *frag_size* parameter, which is only a suggestion to the hardware. The hardware may adjust the

fragment size, based on hardware requirements. For example, if the hardware can't deal with fragments crossing 64-kilobyte boundaries, and the suggested *frag_size* is 60 kilobytes, the driver will probably adjust it to 64 kilobytes.

Another aspect of configuration is determining how big to make the hardware buffer. This determines how much latency that the application has when sending data to the driver or reading data from it. The hardware buffer size is determined by multiplying the *frag_size* by the *max_frags* parameter, so for the application to know the buffer size, it must determine the actual *frag_size* that the driver is using.

You can do this by calling *snd_pcm_channel_setup()* or *snd_pcm_plugin_setup()*, depending on whether or not your application is using the plugin converters. Both of these functions take as an argument a pointer to a **snd_pcm_channel_setup_t** structure that they fill with information about how the channel is configured, including the true *frag_size*.

Preparing the PCM subchannel

The next step in playing back or capturing the sound stream is to prepare the allocated subchannel to run. Do this by calling one of:

- *snd_pcm_plugin_prepare()* if you're using the plugin interface
- *snd_pcm_channel_prepare()*, *snd_pcm_capture_prepare()*, or *snd_pcm_playback_prepare()* if you aren't.

The *snd_pcm_channel_prepare()* function simply calls *snd_pcm_capture_prepare()* or *snd_pcm_playback_prepare()*, depending on the channel direction that you specify.

This step and the `SND_PCM_STATUS_PREPARED` state may seem unnecessary, but they're required to correctly handle underrun conditions when playing back, and overrun conditions when capturing. For more information, see "If the PCM subchannel stops during playback" and "If the PCM subchannel stops during capture," later in this chapter.

Closing the PCM subchannel

When you've finished playing back or capturing audio data, you can close the subchannel by calling `snd_pcm_close()`. This call releases the subchannel and closes the handle.

Playing audio data

Once you've opened and configured a PCM playback device and prepared the PCM subchannel (see "Handling PCM devices," above), you're ready to playback sound data.


There's a complete example of playback in the `wave.c` example in the appendix. You may wish to compile and run the application now, and refer to the running code as you progress through this section.



If your application has the option to produce playback data in multiple formats, choosing a format that the hardware supports directly will reduce the CPU requirements.

Playback states

The state diagram for a PCM device during playback is shown below.

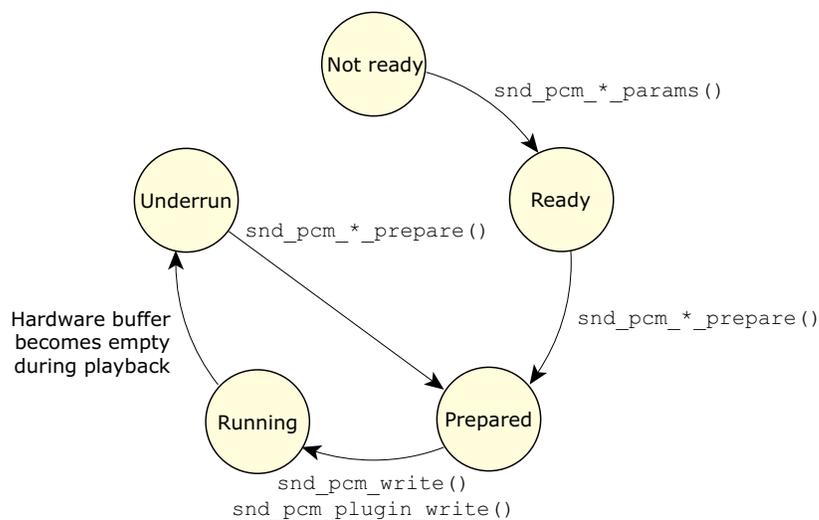

State diagram for PCM devices during playback.

The transition between states is the result of executing an API call, or the result of conditions that occur in the hardware:

SND_PCM_STATUS_NOTREADY to SND_PCM_STATUS_READY

snd_pcm_channel_params() or *snd_pcm_plugin_params()*.

SND_PCM_STATUS_READY to SND_PCM_STATUS_PREPARED

snd_pcm_channel_prepare(), *snd_pcm_playback_prepare()*, or *snd_pcm_plugin_prepare()*.

SND_PCM_STATUS_PREPARED to SND_PCM_STATUS_RUNNING

snd_pcm_write() or *snd_pcm_plugin_write()*.

SND_PCM_STATUS_RUNNING to SND_PCM_STATUS_UNDERRUN

The hardware buffer becomes empty during playback.

SND_PCM_STATUS_UNDERRUN to SND_PCM_STATUS_PREPARED

snd_pcm_channel_prepare(), *snd_pcm_playback_prepare()*, or *snd_pcm_plugin_prepare()*.

For more details on these transitions, see the description of each function in the Audio Library chapter.

Sending data to the PCM subchannel

You can send data to the subchannel by calling either one of the following, depending on whether or not you're using plugin converters:

snd_pcm_write()

The number of bytes written must be a multiple of the fragment size, or the write will fail.

snd_pcm_plugin_write()

The plugin accumulates partial writes until a complete fragment can be sent to the driver.

A full nonblocking write mode is supported if the application can't afford to be blocked on the PCM subchannel. You can enable nonblocking mode when you open the handle or by calling *snd_pcm_nonblock_mode()*.



This approach results in a polled operation mode that isn't recommended.

Another method that your application can use to avoid blocking on the write is to call *select()* (see the *QNX Library Reference*) to wait until the PCM subchannel can accept more data. This is the technique that the **wave.c** example uses. It allows the program to wait on user input while at the same time sending the playback data to the PCM subchannel.

To get the file descriptor to pass to *select()*, call *snd_pcm_file_descriptor()*.



With this technique, *select()* returns when there's space for *frag_size* bytes in the subchannel. If your application tries to write more data than this, it may block on the call.

If the PCM subchannel stops during playback

When playing back, the PCM subchannel stops if the hardware consumes all the data in its buffer. This can happen if the application can't produce data at the rate that the hardware is consuming data. A real-world example of this is when the application is preempted for a period of time by a higher priority process. If this preemption continues long enough, all data in the buffer may be played before the application can add any more.

When this happens, the subchannel changes state to `SND_PCM_STATUS_UNDERRUN`. In this state, it doesn't accept any more data (i.e. *snd_pcm_write()* and *snd_pcm_plugin_write()* fail) and the subchannel doesn't restart playing.

The only ways to move out of this state are to close the subchannel or to reprepare the channel as you did before (see "Preparing the PCM subchannel," earlier in this chapter). This forces the application to recognize and take action to get out of the underrun state; this is primarily for applications that want to synchronize audio with something else. Consider the difficulties involved with synchronization if the subchannel simply moves back to the `SND_PCM_STATUS_RUNNING` state from underrun when more data becomes available.

Stopping the playback

If the application wishes to stop playback, it can simply stop sending data and let the subchannel underrun as described above, but there are better ways.

If you want your application to stop as soon as possible, call one of the drain functions to remove any unplayed data from the hardware buffer:

- *snd_pcm_plugin_playback_drain()* if you're using the plugins
- *snd_pcm_playback_drain()* if you aren't.

If you want to play out all data in the buffers before stopping, call one of:

- *snd_pcm_plugin_flush()* if you're using the plugins
- *snd_pcm_channel_flush()* or *snd_pcm_playback_flush()* if you aren't.

Synchronizing with the PCM subchannel

QSA provides some basic synchronization functionality: your application can find out where in the stream the hardware play position is. The resolution of this position is entirely a function of the hardware driver; consult the specific device driver documentation for details if this is important to your application.

The API calls to get this information are:

- *snd_pcm_plugin_status()* if you're using the plugin interface
- *snd_pcm_channel_status()* if you aren't.

Both of these functions fill in a **`snd_pcm_channel_status_t`** structure. You'll need to check the following members of this structure:

- | | |
|---------------|--|
| <i>scount</i> | The hardware play position, in bytes relative to the start of the stream since the last time the channel was prepared. The act of preparing a channel resets this count. |
| <i>count</i> | The play position, in bytes relative to the total number of bytes written to the device. |



The *count* member isn't used if the mmap plugin is used. To disable the mmap plugin, call *snd_pcm_plugin_set_disable()*.

For example, consider a stream where 1,000,000 bytes have been written to the device. If the status call sets *scount* to 999,000 and *count* to 1000, there are 1000 bytes of data in the buffer remaining to be played, and 999,000 bytes of the stream have already been played.

Capturing audio data

Once you've opened and configured a PCM capture device and prepared the PCM subchannel (see "Handling PCM devices," above), you're ready to capture sound data.


There's a complete example of capturing audio data in the **waverec.c** example in the appendix. You may wish to compile and run the application now, and refer to the running code as you progress through this section.

Selecting what to capture

Most sound cards allow only one analog signal to be connected to the ADC. Therefore, in order to capture audio data, the user or application must select the appropriate input source. Some sound cards allow multiple signals to be connected to the ADC; in this case, make sure the appropriate signal is one of them. There's an API call, *snd_mixer_group_write()*, for controlling the mixer so that the application can set this up directly; it's described in the Mixer Architecture chapter. If you're using the **waverec.c** example, just use the Photon mixer application to select the input.

Capture states

The state diagram for a PCM device during capture is shown below.

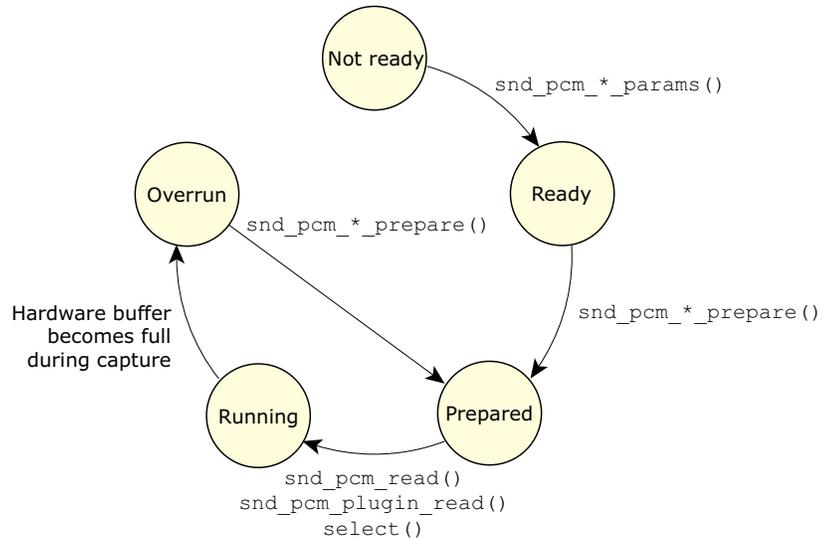

State diagram for PCM devices during capture.

The transition between states is the result of executing an API call, or the result of conditions that occur in the hardware:

SND_PCM_STATUS_NOTREADY to SND_PCM_STATUS_READY
snd_pcm_channel_params() or *snd_pcm_plugin_params()*.

SND_PCM_STATUS_READY to SND_PCM_STATUS_PREPARED
snd_pcm_capture_prepare(), *snd_pcm_channel_prepare()*,
or *snd_pcm_plugin_prepare()*.

SND_PCM_STATUS_PREPARED to SND_PCM_STATUS_RUNNING
snd_pcm_read() or *snd_pcm_plugin_read()*.

select() When the device is in the PREPARED state, a *select()* call against the capture file descriptors changes the driver to the RUNNING state.

SND_PCM_STATUS_RUNNING to SND_PCM_STATUS_OVERRUN
The hardware buffer becomes full during capture;
snd_pcm_read() and *snd_pcm_plugin_read()* fail.

SND_PCM.STATUS_OVERRUN to SND_PCM.STATUS_PREPARED
snd_pcm_capture_prepare(), *snd_pcm_channel_prepare()*,
or *snd_pcm_plugin_prepare()*.

For more details on these transitions, see the description of each function in the Audio Library chapter.

Receiving data from the PCM subchannel

You can receive data from the subchannel by calling either one of the following, depending on whether or not you're plugin converters:

snd_pcm_read()

The number of bytes read must be a multiple of the fragment size, or the read fails.

snd_pcm_plugin_read()

The plugin reads an entire fragment from the driver and then fulfills requests for partial reads from that buffer until another full fragment has to be read.

A full nonblocking read mode is supported if the application can't afford to be blocked on the PCM subchannel. You can enable nonblocking mode when you open the handle or by using the *snd_pcm_nonblock_mode()* API call.



This approach results in a polled operation mode that isn't recommended.

Another method that your application can use to avoid blocking on the read is to use *select()* (see the *QNX Library Reference*) to wait until the PCM subchannel has more data. This is the technique that the *waverec.c* example uses. It allows the program to wait on user input while at the same time receiving the capture data from the PCM subchannel.

To get the file descriptor to pass to *select()*, call *snd_pcm_file_descriptor()*.



With this technique, *select()* returns when there are *frag_size* bytes in the subchannel. If your application tries to read more data than this, it may block on the call.

If the PCM subchannel stops during capture

When capturing, the PCM subchannel stops if the hardware has no room for additional data left in its buffer. This can happen if the application can't consume data at the rate that the hardware is producing data. A real-world example of this is when the application is preempted for a period of time by a higher priority process. If this preemption continues long enough, the data buffer may be filled before the application can remove any data.

When this happens, the subchannel changes state to `SND_PCM_STATUS_OVERRUN`. In this state, it won't provide any more data (i.e. *snd_pcm_read()* and *snd_pcm_plugin_read()* fail) and the subchannel doesn't restart capturing.

The only ways to move out of this state are to close the subchannel or to reprepare the channel as you did before. This forces the application to recognize and take action to get out of the overrun state; this is primarily for applications that want to synchronize audio with something else. Consider the difficulties involved with synchronization if the subchannel simply moves back to the `SND_PCM_STATUS_RUNNING` state from overrun when space becomes available; the recorded sample would be discontinuous.

Stopping the capture

If your application wishes to stop capturing, it can simply stop reading data and let the subchannel overrun as described above, but there's a better way.

If you want your application to stop capturing immediately and delete any unread data from the hardware buffer, call one of the flush functions:

- *snd_pcm_plugin_flush()* if you're using the plugins

- *snd_pcm_channel_flush()* or *snd_pcm_capture_flush()* if you aren't.

Synchronizing with the PCM subchannel

QSA provides some basic synchronization functionality: an application can find out where in the stream the hardware capture position is. The resolution of this position is entirely a function of the hardware driver; consult the specific device driver documentation for details if this is important to your application.

The API calls to get this information are:

- *snd_pcm_plugin_status()* if you're using the plugin interface
- *snd_pcm_channel_status()* if you aren't.

Both of these functions fill in a **snd_pcm_channel_status_t** structure. You'll need to check the following members of this structure:

- | | |
|---------------|--|
| <i>scount</i> | The hardware capture position, in bytes relative to the start of the stream since you last prepared the channel. The act of preparing a channel resets this count. |
| <i>count</i> | The capture position as bytes in the hardware buffer. |



The *count* member isn't used if the mmap plugin is used. To disable the mmap plugin, call *snd_pcm_plugin_set_disable()*.

Chapter 4

Mixer Architecture

In this chapter...


Opening the mixer device	31
Controlling a mixer group	32
The best mixer group with respect to your PCM subchannel	33
Finding all mixer groups	34
Mixer event notification	35
Closing the mixer device	36



You can usually build an audio mixer from a relatively small number of components. Each of these components performs a specific mixing function. A summary of these components or *elements* follows:

Input	A connection point where an external analog signal is brought into the mixer.
Output	A connection point where an analog signal is taken from the mixer.
ADC	An element that converts analog signals to digital samples.
DAC	An element that converts digital samples to analog signals.
Switch	An element that can connect two or more points together. A simple switch may be used as a mute control. More complicated switches can mute the channels of a stream individually, or can even form crossbar matrixes where n input signals can be connected to n output signals.
Volume	An element that adjusts the amplitude level of a signal by applying attenuation or gain.
Accumulator	An element the adds all signals input to it and produces an output signal.
Multiplexer	An element that allows the signal on one of its inputs to become its output.

By using these elements you can build a simple sound card mixer:

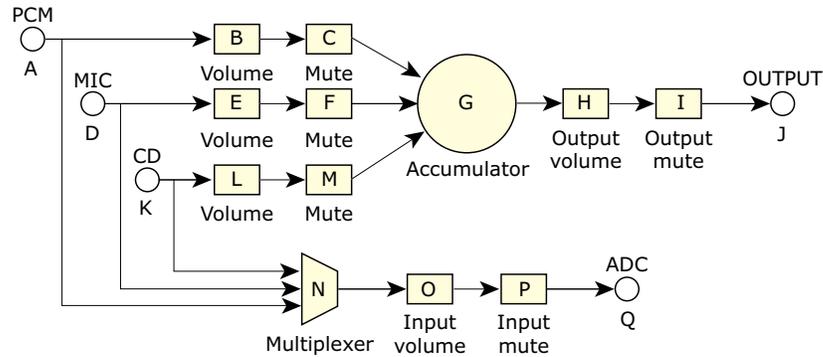

A simple sound card mixer.

In the diagram, the mute figures are switches, and the MIC and CD are input elements. This diagram is in fact a simplified representation of the Audio Codec '97 mixer, one of the most common mixers found on sound cards.

It's possible to control these mixer elements directly using the `snd_mixer_element_read()` and `snd_mixer_element_write()` functions, but this method isn't recommended because:

- The arguments to these functions are very dependent on the element type.
- Controlling many elements to change mixer functionality is difficult with this method.
- There's a better method.

The element interface is the lowest level of control for a mixer and is complicated to control. One solution to this complexity is to arrange elements that are associated with a function into a *mixer group*. To further refine this idea, groups are classified as either playback or capture groups. To simplify creating and managing groups, a hard set of rules was developed for how groups are built from elements:

- A *playback group* contains at most one volume element and one switch element (as a mute).

- A *capture group* contains at most one each of a volume element, switch element (as a mute), and capture selection element. The capture selection element may be a multiplexer or a switch.

If you apply these rules to the simple mixer in the above diagram, you get the following:

Playback Group PCM

Elements *B* (volume) and *C* (switch).

Playback Group MIC

Elements *E* (volume) and *F* (switch).

Playback Group CD

Elements *L* (volume) and *M* (switch).

Playback Group MASTER

Elements *H* (volume) and *I* (switch).

Capture Group MIC

Element *N* (multiplexer); there's no volume or switch.

Capture Group CD

Element *N* (multiplexer); there's no volume or switch.

Capture Group INPUT

Elements *O* (volume) and *P* (switch).

In separating the elements into groups, you've reduced the complexity of control (there are 7 groups instead of 17 elements), and each group associates well with what applications want to control.

Opening the mixer device

To open a connection to the mixer device, call `snd_mixer_open()`. This call has arguments for selecting the card and mixer device number to open. Most sound cards have only one mixer, but there may be additional mixers in special cases.

The *snd_mixer_open()* call returns a mixer handle that you'll use as an argument for additional API calls applied to this device. It's a pointer to a **snd_mixer_t** structure, which is an opaque data type.

Controlling a mixer group

The best way to control a mixer group is to use the read-modify-write technique. Using this technique, you can examine the group capabilities and ranges before adjusting the group.

The first step in reading the properties and settings of a mixer group is to identify the group. Every mixer group has a name, but because two groups may have the same name, a name alone isn't enough to identify a specific mixer group. In order to make groups unique, mixer groups are identified by the combination of name and index. The index is an integer that represents the instance number of the name. In most cases, the index is 0; in the case of two mixer groups with the same name, the first has an index of 0, and the second has an index of 1.

To read a mixer group, call the *snd_mixer_group_read()* function. The arguments to this function are the mixer handle and the group control structure. The group control structure is of type **snd_mixer_group_t**; for details about its members, see the Audio Library chapter.

To read a particular group, you must set its name and index in the *gid* substructure (see **snd_mixer_gid_t**) before making the call. If the call to *snd_mixer_group_read()* succeeds, the function fills in the structure with the group's capabilities and current settings.

Now that you have the group capabilities and current settings, you can modify them before you write them back to the mixer group.

To write the changes to the mixer group, call *snd_mixer_group_write()*, passing as arguments the mixer handle and the group control structure.

The best mixer group with respect to your PCM subchannel

In a typical mixer, there are many playback mixer group controls, and possibly several that will control the volume and mute of the stream your application is playing.

For example, consider the Sound Blaster Live playing a wave file. Three playback mixer controls adjust the volume of the playback: Master, PCM, and PCM Subchannel. Although each of these groups can control the volume of our playback, some aren't specific to just our stream, and thus have more side effects.

As an example, consider what happens if you increase your wave file volume by using the Master group. If you do this, any other streams — such a CD playback — are affected as well. So clearly, the best group to use is the PCM subchannel, as it affects only your stream. However, on some cards, a subchannel group might not exist, so you need a better method to find the best group.

The best way to figure out which is the best group for a PCM subchannel is to let the driver (i.e. the driver author) do it. You can obtain the identity of the best mixer group for a PCM subchannel by calling `snd_pcm_channel_setup()` or `snd_pcm_plugin_setup()`, as shown below:

```
memset (&setup, 0, sizeof (setup));
memset (&group, 0, sizeof (group));
setup.channel = SND_PCM_CHANNEL_PLAYBACK;
setup.mixer_gid = &group.gid;
if ((rtn = snd_pcm_plugin_setup (pcm_handle, &setup)) < 0)
{
    return -1;
}
```



You must initialize the `setup` structure to zero and then set the `mixer_gid` pointer to a storage location for the group identifier.

One thing to note is that the best group may change, depending on the state of the PCM subchannel. Remember that the PCM subchannels

aren't allocated to a client until the parameters of the channel are established. Similarly, the subchannel mixer group isn't available until the subchannel is allocated. Using the example of the Sound Blaster Live, the best mixer group before the subchannel is allocated is the PCM group and, after allocation, the PCM Subchannel group.

Finding all mixer groups

You can get a complete list of mixer groups by calling *snd_mixer_groups()*. You usually make this call twice, once to get the total number of mixer groups, then a second time to actually read their IDs. The arguments to the call are the mixer handle and a *snd_mixer_group_t* structure. The structure contains a pointer to where the groups' identifiers are to be stored (an array of *snd_mixer_gid_t* structures), and the size of that array. The call fills in the structure with how many identifiers were stored, and indicates if some couldn't be stored because they would exceed the storage size.

Here's a short example (the *snd_strerror()* prints error messages for the sound functions):

```
while (1)
{
    memset (&groups, 0, sizeof (groups));
    if ((ret = snd_mixer_groups (mixer_handle, &groups) < 0))
    {
        fprintf (stderr, "snd_mixer_groups API call - %s",
                snd_strerror (ret));
    }

    mixer_n_groups = groups.groups_over;
    if (mixer_n_groups > 0)
    {
        groups.groups_size = mixer_n_groups;
        groups.pgroups = (snd_mixer_gid_t *) malloc (
            sizeof (snd_mixer_gid_t) * mixer_n_groups);

        if (groups.pgroups == NULL)
            fprintf (stderr, "Unable to malloc group array - %s",
                    strerror (errno));

        groups.groups_over = 0;
        groups.groups = 0;
    }
}
```

```

    if (snd_mixer_groups (mixer_handle, &groups) < 0)
        fprintf (stderr, "No Mixer Groups ");

    if (groups.groups_over > 0)
    {
        free (groups.pgroups);
        continue;
    }
    else
    {
        printf ("sorting GID table \n");
        snd_mixer_sort_gid_table (groups.pgroups, mixer_n_groups,
            snd_mixer_default_weights);
        break;
    }
}
}

```

Mixer event notification

By default, all mixer applications are required to keep up-to-date with all mixer changes. This is done by enqueueing a mixer-change event on all applications other than the application making a change. The driver enqueues these events on all applications that have an open mixer handle, unless the application uses the *snd_mixer_set_filter()* API call to mask out events it's not interested in.

Applications use the *snd_mixer_read()* function to read the enqueued mixer events. The arguments to this functions are the mixer handle and a structure of callback functions to call based on the event type.

You can use the *select()* function (see the *QNX Library Reference*) to determine when to call *snd_mixer_read()*. To get the file descriptor to pass to *select()*, call *snd_mixer_file_descriptor()*.

Here's a short example:

```

static void mixer_callback_group (void *private_data,
                                int cmd,
                                snd_mixer_gid_t * gid)
{
    switch (cmd)
    {

```

```
    case SND_MIXER_READ_GROUP_VALUE:
        printf ("Mixer group %s %d changed value \n",
                gid->name, gid->index);
        break;

    case SND_MIXER_READ_GROUP_ADD:
        break;

    case SND_MIXER_READ_GROUP_REMOVE:
        break;
}

int mixer_update (int fd, void *data, unsigned mode)
{
    snd_mixer_callbacks_t callbacks = { 0, 0, 0, 0 };

    callbacks.group = mixer_callback_group;
    snd_mixer_read (mixer_handle, &callbacks);
    return (Pt_CONTINUE);
}

int main (void)
{
    snd_mixer_t *mixer_handle;
    int ret;

    if ((ret = snd_mixer_open (&mixer_handle, 0, 0) < 0))
        printf ("Unable to open/read mixer - %s",
                snd_strerror (ret));

    PtAppAddFd (NULL,
                snd_mixer_file_descriptor (mixer_handle),
                Pt_FD_READ, mixer_update, NULL);
    ...
}
```

Closing the mixer device

To close the mixer handle, simply call *snd_mixer_close()*.

Chapter 5

Audio Library



This chapter describes all of the supported QSA API functions, in alphabetical order; undocumented calls aren't supported.

The QNX Sound Architecture (QSA) has similarities to the Advanced Linux Sound Architecture (ALSA), but isn't compatible. Though the function names may be the same, there's no guarantee that QSA and ALSA calls behave the same (some definitely don't).

For information about the sections in each description, see "What's in a function description?" in the Summary of Functions chapter of the *QNX Library Reference*.

snd_card_get_longname()

© 2005, QNX Software Systems

Find the long name for a given card number

Synopsis:

```
#include <sys/asoundlib.h>

int snd_card_longname ( int card,
                        char *name,
                        size_t size );
```

Arguments:

card The card number.

name A buffer in which *snd_card_get_longname()* stores the name.

size The size of the buffer, in bytes.

Library:

`libasound.so`

Description:

The *snd_card_get_longname()* function gets the long name associated with the given card number, and stores as much of the name as possible in the buffer pointed to by *name*.

Returns:

Zero, or a negative error code.

Errors:

-EINVAL The card number is invalid, or *name* is NULL.

-EACCES Search permission is denied on a component of the path prefix, or the device exists and the permissions specified are denied.

-EINTR The *open()* operation was interrupted by a signal.

- EMFILE Too many file descriptors are currently in use by this process.
- ENFILE Too many files are currently open in the system.
- ENOENT The named device doesn't exist.
- ENOMEM No memory available for data structure.
- SND_ERROR_INCOMPATIBLE_VERSION
The audio driver version is incompatible with the client library that the application is using.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:*snd_card_name()*, *snd_card_get_name()*

snd_card_get_name()

© 2005, QNX Software Systems

Find the name for a given card number

Synopsis:

```
#include <sys/asoundlib.h>

int snd_card_get_name( int card,
                      char *name,
                      size_t size );
```

Arguments:

card The card number.

name A buffer in which *snd_card_get_name()* stores the name.

size The size of the buffer, in bytes.

Library:

`libasound.so`

Description:

The *snd_card_get_name()* function gets the common name that's associated with the given card number, and stores as much of the name as possible in the buffer pointed to by *name*.

Returns:

Zero, or a negative error code.

Errors:

-EINVAL The card number is invalid, or *name* is NULL.

-EACCES Search permission is denied on a component of the path prefix, or the device exists and the permissions specified are denied.

-EINTR The *open()* operation was interrupted by a signal.

- EMFILE Too many file descriptors are currently in use by this process.
- ENFILE Too many files are currently open in the system.
- ENOENT The named device doesn't exist.
- ENOMEM No memory available for data structure.
- SND_ERROR_INCOMPATIBLE_VERSION
The audio driver version is incompatible with the client library that the application is using.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:*snd_card_get_longname()*, *snd_card_name()*

snd_card_name()

© 2005, QNX Software Systems

Find the card number for a given name

Synopsis:

```
#include <sys/asoundlib.h>

int snd_card_name ( const char *string );
```

Arguments:

string The name of the card.

Library:

`libasound.so`

Description:

The *snd_card_name()* function returns the card number associated with the given card name.

Returns:

A card number (positive integer), or a negative error code.

Errors:

- | | |
|---------|---|
| -EINVAL | The <i>string</i> argument is NULL, an empty string, or isn't the name of a card. |
| -EACCES | Search permission is denied on a component of the path prefix, or the device exists and the permissions specified are denied. |
| -EINTR | The <i>open()</i> operation was interrupted by a signal. |
| -EMFILE | Too many file descriptors are currently in use by this process. |
| -ENFILE | Too many files are currently open in the system. |
| -ENOENT | The named device doesn't exist. |

-ENOMEM No memory available for data structure.

-SND_ERROR_INCOMPATIBLE_VERSION

The audio driver version is incompatible with the client library that the application is using.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_card_get_longname(), *snd_card_get_name()*

snd_cards()

© 2005, QNX Software Systems

Count the sound cards

Synopsis:

```
#include <sys/asoundlib.h>

int snd_cards ( void );
```

Library:

`libasound.so`

Description:

The *snd_cards()* function returns the instantaneous number of sound cards that have running drivers. There's no guarantee that the sound cards have contiguous card numbers, and cards may be unmounted at any time.



This function is mainly provided for historical reasons. You should use *snd_cards_list()* instead.

Returns:

The number of sound cards.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_cards_list()

snd_cards_list()

© 2005, QNX Software Systems

Count the sound cards and list their card numbers in an array

Synopsis:

```
#include <sys/asoundlib.h>

int snd_cards_list( int *cards,
                  int card_array_size,
                  int *cards_over );
```

Arguments:

<i>cards</i>	An array in which <i>snd_cards_list()</i> stores the card numbers.
<i>card_array_size</i>	The number of card numbers that the array <i>cards</i> can hold.
<i>cards_over</i>	The number of cards that wouldn't fit in the <i>cards</i> array.

Library:

`libasound.so`

Description:

The *snd_cards_list()* function returns the instantaneous number of sound cards that have running drivers. There's no guarantee that the sound cards have contiguous card numbers, and cards may be unmounted at any time.

You should use this function instead of *snd_cards()* because *snd_cards_list()* can fill in an array of card numbers. This overcomes the difficulties involved in hunting a (possibly) non-contiguous list of card numbers for active cards.

Returns:

The number of sound cards.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_cards()

Synopsis:

```
typedef struct snd_ctl_callbacks {
    void *private_data; /* should be used by an application */
    void (*rebuild) (void *private_data);
    void (*xswitch) (void *private_data, int cmd,
                    int iface, snd_switch_list_item_t *item);
    void *reserved[29]; /* reserved for the future use - must be NULL!!!
} snd_ctl_callbacks_t;
```

Description:

Use the `snd_ctl_callbacks_t` structure to define the callback functions that you need to handle control events. Pass a pointer to an instance of this structure to `snd_ctl_read()`.

The members of the `snd_ctl_callbacks_t` structure include:

- *private_data*, a pointer to arbitrary data that you want to pass to the callbacks
- pointers to the callbacks, which are described below.



Make sure that you zero-fill any members that you aren't interested in. You can zero-fill the entire `snd_ctl_callbacks_t` structure if you aren't interested in tracking any of these events.

rebuild callback

The *rebuild* callback is called whenever the control device is rebuilt. Its only argument is the *private_data* that you specified in this structure.

xswitch callback

The *xswitch* callback is called whenever a switch changes. Its arguments are:

private_data A pointer to the arbitrary data that you specified in this structure.

<i>cmd</i>	One of: <ul style="list-style-type: none">● SND_CTL_READ_SWITCH_VALUE● SND_CTL_READ_SWITCH_CHANGE● SND_CTL_READ_SWITCH_ADD● SND_CTL_READ_SWITCH_REMOVE
<i>iface</i>	The device interface the switch is natively associated with. The possible values are (from <code><sys/asound.h></code>): <ul style="list-style-type: none">● SND_CTL_IFACE_CONTROL● SND_CTL_IFACE_MIXER● SND_CTL_IFACE_PCM_PLAYBACK● SND_CTL_IFACE_PCM_CAPTURE
<i>item</i>	A pointer to a <code>snd_switch_list_item_t</code> structure that identifies the specific switch that's been changed. This structure has only a <i>name</i> member.

Classification:

QNX Neutrino

See also:*snd_ctl_read()*.

snd_ctl_close()

© 2005, QNX Software Systems

Close a control handle

Synopsis:

```
#include <sys/asoundlib.h>

int snd_ctl_close( snd_ctl_t *handle );
```

Arguments:

handle The handle for the control connection to the card. This must be a handle created by *snd_ctl_open()*.

Library:

`libasound.so`

Description:

The *snd_ctl_close()* function frees all the resources allocated with the control handle and closes the connection to the control interface.

Returns:

Zero on success, or a negative value on error.

Errors:

-EBADF	Invalid file descriptor. Your <i>handle</i> may be corrupt.
-EINTR	The <i>close()</i> call was interrupted by a signal.
-EINVAL	Invalid <i>handle</i> argument.
-EIO	An I/O error occurred while updating the directory information.
-ENOSPC	A previous buffered write call has failed.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_ctl_open()

snd_ctl_file_descriptor()

© 2005, QNX Software Systems

Get the control file descriptor

Synopsis:

```
#include <sys/asoundlib.h>

int snd_ctl_file_descriptor( snd_ctl_t *handle );
```

Arguments:

handle The handle for the control connection to the card. This must be a handle created by *snd_ctl_open()*.

Library:

`libasound.so`

Description:

The *snd_ctl_file_descriptor()* function returns the file descriptor of the connection to the control interface.

You can use the file descriptor for the *select()* function (see the QNX *Library Reference*) for determining if something can be read or written. Your application should then call *snd_ctl_read()* if data is waiting to be read.

Returns:

The file descriptor of the connection to the control interface, or a negative value if an error occurs.

Errors:

-EINVAL Invalid *handle* argument.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_ctl_open(), *snd_ctl_read()*

select() in the *QNX Library Reference*

snd_ctl_hw_info()

© 2005, QNX Software Systems

Get information about a sound card's hardware

Synopsis:

```
#include <sys/asoundlib.h>

int snd_ctl_hw_info( snd_ctl_t *handle,
                    struct snd_ctl_hw_info *info );
```

Arguments:

handle The handle for the control connection to the card. This must be a handle created by *snd_ctl_open()*.

info A pointer to a **snd_ctl_hw_info_t** structure in which *snd_ctl_hw_info()* stores the information.

Library:

libasound.so

Description:

The *snd_ctl_hw_info()* function fills the *info* structure with information about the sound card hardware selected by *handle*.

Returns:

Zero on success, or a negative value if an error occurs.

Errors:

-EBADF Invalid file descriptor. Your *handle* may be corrupt.

-EINVAL Invalid *handle* argument.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

`snd_ctl_hw_info_t`, `snd_ctl_open()`

Synopsis:

```
typedef struct snd_ctl_hw_info
{
    uint32_t    type;
    uint32_t    hwdepdevs;
    uint32_t    pcmdevs;
    uint32_t    mixerdevs;
    uint32_t    mididevs;
    uint32_t    timerdevs;
    int8_t     id[16];
    int8_t     abbreviation[16];
    int8_t     name[32];
    int8_t     longname[80];
    uint8_t    reserved[128];
}            snd_ctl_hw_info_t;
```

Description:

The `snd_ctl_hw_info_t` structure describes a sound card's hardware. You can get this information by calling `snd_ctl_hw_info()`.

The members include:

<i>type</i>	The type of sound card. Deprecated; don't use this member.
<i>hwdepdevs</i>	The total number of hardware-dependent devices on this sound card. Deprecated; don't use this member.
<i>pcmdevs</i>	The total number of PCM devices on this sound card.
<i>mixerdevs</i>	The total number of mixer devices on this sound card.
<i>mididevs</i>	The total number of midi devices on this sound card. Not supported at this time; don't use this member.
<i>timerdevs</i>	The total number of timer devices on this sound card. Not supported at this time; don't use this member.

<i>id</i>	An ID string that identifies this sound card.
<i>abbreviation</i>	An abbreviated name for identifying this sound card.
<i>name</i>	A common name for this sound card.
<i>longname</i>	A unique, descriptive name for this sound card.
<i>reserved</i>	Reserved; this member must be filled with zeroes.

Classification:

QNX Neutrino

See also:

snd_ctl_hw_info()

snd_ctl_mixer_switch_list()

© 2005, QNX Software Systems

Get the number and names of control switches for the mixer

Synopsis:

```
#include <sys/asoundlib.h >
int snd_ctl_mixer_switch_list( snd_ctl_t *handle,
                              int dev, snd_switch_list_t *list );
```

Arguments:

handle The handle for the control device. This must have been created by *snd_ctl_open()*.

dev The mixer device the switches apply to.

list A pointer to a **snd_switch_list_t** structure that *snd_ctl_mixer_switch_list()* fills with information about the switch.

Library:

libasound.so

Description:

The *snd_ctl_mixer_switch_list()* function uses the control device handle to fill the given **snd_switch_list_t** structure with the number of switches for the mixer specified. It also fills in the array of switches pointed to by *pswitches* to a limit of *switches_size*. Before calling *snd_mixer_groups()*, set the members of the **snd_switch_list_t** as follows:

pswitches This pointer must be NULL or point to a valid storage location for the switches (i.e. an array of **snd_switch_list_item_t** structures).

switches_size The size of the *pswitches* storage location in **sizeof(snd_switch_list_item_t)** units (i.e. the number of entries in the array).

On a successful return, the *snd_ctl_mixer_switch_list()* function will fill in these members:

<i>switches</i>	The total switches in this mixer device.
<i>switches_over</i>	The number of switches that couldn't be copied to the storage location.

Returns:

Zero on success, or a negative value if an error occurs.

Errors:

-EINVAL Invalid *handle* argument.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

The switch struct must be initialized to a known state before making the call; use *memset()* to set the struct to zero, and then set the name member to specify which switch to read.

See also:

snd_mixer_group_read(), *mix_ctl.c* application example source code

snd_ctl_mixer_switch_read()

© 2005, QNX Software Systems

Get a mixer switch setting

Synopsis:

```
#include <sys/asoundlib.h >

int snd_ctl_mixer_switch_read(
    snd_ctl_t *handle,
    int dev,
    snd_switch_t * sw )
```

Arguments:

handle The handle for the control device. This must have been created by *snd_ctl_open()*.

dev The mixer device the switches apply to.

sw A pointer to a **snd_switch_t** structure that *snd_ctl_mixer_switch_read()* fills with information about the switch.

Library:

libasound.so

Description:

The *snd_ctl_mixer_switch_read()* function reads the **snd_switch_t** structure for the switch identified by the *name* member of the structure.



You must initialize the name member before calling this function.

Returns:

Zero on success, or a negative value if an error occurs.

Errors:

- EINVAL Invalid *handle* argument.
- ENXIO The group wasn't found.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_mixer_groups(), `mix_ctl.c` application example source code

snd_ctl_mixer_switch_write()

© 2005, QNX Software Systems

Adjust a mixer switch setting

Synopsis:

```
#include < sys/asoundlib.h >

int snd_ctl_mixer_switch_write(
    snd_ctl_t *handle,
    int dev,
    snd_switch_t * sw )
```

Arguments:

handle The handle for the control device. This must have been created by *snd_ctl_open()*.

dev The mixer device the switches apply to.

sw A pointer to a **snd_switch_t** structure that *snd_ctl_mixer_switch_write()* writes to the driver about the switch.

Library:

libasound.so

Description:

The *snd_ctl_mixer_switch_write()* function writes the **snd_switch_t** structure for the switch identified by the structure's *name* member.

Returns:

Zero on success, or a negative value if an error occurs.

Errors:

-EINVAL Invalid *handle* argument.

-ENXIO The group wasn't found.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

The switch struct must be initialized completely before making the call.

See also:

snd_mixer_group_write(), `mix_ctl.c` application example source code

snd_ctl_open()

© 2005, QNX Software Systems

Create a connection and handle to the specified control device

Synopsis:

```
#include <sys/asoundlib.h>

int snd_ctl_open( snd_ctl_t **handle,
                 int card );
```

Arguments:

handle A pointer to a location in which *snd_ctl_open()* stores a handle for the card, which you need to pass to the other *snd_ctl_** functions.

card The card number.

Library:

`libasound.a`

Description:

The *snd_ctl_open()* function creates a new handle and opens a connection to the control interface for sound card number *card* (0-N). This handle may be used in all of the other *snd_ctl_**() calls.

Returns:

Zero on success, or a negative value if an error occurs.

Errors:

-EACCES Search permission is denied on a component of the path prefix, or the device exists and the permissions specified are denied.

-EINTR The *open()* operation was interrupted by a signal.

-EMFILE Too many file descriptors are currently in use by this process.

-ENFILE Too many files are currently open in the system.

- ENOENT The named device doesn't exist.
- ENOMEM No memory available for data structure.
- SND_ERROR_INCOMPATIBLE_VERSION
 The audio driver version is incompatible with the
 client library that the application is using.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_ctl_close()

snd_ctl_pcm_channel_info()

© 2005, QNX Software Systems

Get information about a PCM channel's capabilities from a control handle

Synopsis:

```
#include <sys/asoundlib.h>

int snd_ctl_pcm_channel_info(
    snd_ctl_t *handle,
    int dev,
    int chn,
    int subdev,
    snd_pcm_channel_info_t *info );
```

Arguments:

<i>handle</i>	The handle for the control connection to the card. This must be a handle created by <i>snd_ctl_open()</i> .
<i>dev</i>	The PCM device number.
<i>chn</i>	The channel direction; either SND_PCM_CHANNEL_CAPTURE or SND_PCM_CHANNEL_PLAYBACK.
<i>subdev</i>	The PCM subchannel.
<i>info</i>	A pointer to a <code>snd_pcm_channel_info_t</code> structure in which <i>snd_ctl_pcm_channel_info()</i> stores the information.

Library:

`libasound.so`

Description:

The *snd_ctl_pcm_channel_info()* function fills the *info* structure with data about the PCM subchannel *subdev* in the PCM channel *chn* on the sound card selected by *handle*.



This function gets information about the complete capabilities of the system. It's similar to *snd_pcm_channel_info()* and *snd_pcm_plugin_info()*, but these functions get a dynamic “snapshot” of the system's current capabilities, which can shrink and grow as subchannels are allocated and freed.

Returns:

Zero on success, or a negative error code.

Errors:

-EINVAL Invalid *handle*.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_ctl_open(), *snd_pcm_channel_info()*,
snd_pcm_channel_info_t, *snd_pcm_plugin_info()*

snd_ctl_pcm_info()

© 2005, QNX Software Systems

Get general information about a PCM device from a control handle

Synopsis:

```
#include <sys/asoundlib.h>

int snd_ctl_pcm_info( snd_ctl_t *handle,
                    int dev,
                    snd_pcm_info_t *info );
```

Arguments:

handle The handle for the control connection to the card. This must be a handle created by *snd_ctl_open()*.

dev The PCM device.

info A pointer to a `snd_pcm_info_t` structure in which *snd_ctl_pcm_info()* stores the information.

Library:

`libasound.so`

Description:

The *snd_ctl_pcm_info()* function fills the *info* structure with information about the capabilities of the PCM device *dev* on the sound card selected by *handle*.

Returns:

Zero on success, or a negative error code.

Errors:

-EINVAL Invalid *handle*.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_ctl_open(), *snd_pcm_info()*, **snd_pcm_info_t**

snd_ctl_read()

© 2005, QNX Software Systems

Read pending control events

Synopsis:

```
#include <sys/asoundlib.h>

int snd_ctl_read( snd_ctl_t *handle,
                  snd_ctl_callbacks_t *callbacks );
```

Arguments:

handle The handle for the control connection to the card. This must be a handle created by *snd_ctl_open()*.

callbacks A pointer to a **snd_ctl_callbacks_t** structure that defines the callbacks for the events.

Library:

libasound.so

Description:

The *snd_ctl_read()* function reads pending control events from the control handle. As each event is read, the list of callbacks is checked for a handler for this event. If a match is found, the callback is invoked. This function is usually called on the return of the *select()* library call (see the *QNX Library Reference*).



If you register to receive notification of events (e.g. by using *select()*), it's very important that you clear the event queue by calling *snd_ctl_read()*, even if you don't want or need the information. The event queues are open-ended and may cause trouble if allowed to grow in an uncontrolled manner. The best practice is to read the events in the queues as you receive notification, so that they don't have a chance to accumulate.

Returns:

The number of events read from the handle, or a negative value on error.

Errors:

- EBADF Invalid file descriptor. Your *handle* may be corrupt.
- EINTR The read operation was interrupted by a signal, and either no data was transferred, or the resource manager responsible for that file doesn't report partial transfers.
- EIO An event I/O error occurred.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_ctl_callbacks_t, *snd_ctl_file_descriptor()*, *snd_ctl_open()*
select() in the *QNX Library Reference*

Synopsis:

```
typedef struct snd_mixer_callbacks {
    void *private_data; /* should be used with an application */
    void (*rebuild) (void *private_data);
    void (*element) (void *private_data, int cmd,
                    snd_mixer_eid_t *eid);
    void (*group) (void *private_data, int cmd,
                  snd_mixer_gid_t *gid);
    void *reserved[28]; /* reserved for the future use - must be NULL!!!
} snd_mixer_callbacks_t;
```

Description:

The `snd_mixer_callbacks_t` structure defines a list of callbacks that you can provide to handle events read by `snd_mixer_read()`. The members include:

- *private_data*, a pointer to arbitrary data that you want to pass to the callbacks
- pointers to the callbacks, which are described below.



Make sure that you zero-fill any members that you aren't interested in. You can zero-fill the entire `snd_mixer_callbacks_t` structure if you aren't interested in tracking any of these events. The `wave.c` example does this.

rebuild callback

The *rebuild* callback is called whenever the mixer is rebuilt. Its only argument is the *private_data* that you specified in this structure.

element callback

The *element* callback is called whenever an element event occurs. The arguments to this function are:

private_data A pointer to the arbitrary data that you specified in this structure.

<i>cmd</i>	A SND_MIXER_READ_ELEMENT_* event code: <ul style="list-style-type: none">● SND_MIXER_READ_ELEMENT_VALUE — the element's value changed.● SND_MIXER_READ_ELEMENT_CHANGE — the element changed (something other than its value).● SND_MIXER_READ_ELEMENT_ADD — the element was added (i.e. created).● SND_MIXER_READ_ELEMENT_REMOVE — the element was removed (i.e. destroyed).● SND_MIXER_READ_ELEMENT_ROUTE — the element's routing information changed.
<i>eid</i>	A pointer to a <code>snd_mixer_eid_t</code> structure that holds the ID of the element affected by the event.

group callback

The *group* callback is called whenever a group event occurs. The arguments are:

<i>private_data</i>	A pointer to the arbitrary data that you specified in this structure.
<i>cmd</i>	A SND_MIXER_READ_GROUP_* event code: <ul style="list-style-type: none">● SND_MIXER_READ_GROUP_VALUE — the group's value changed.● SND_MIXER_READ_GROUP_CHANGE — the group changed (something other than the value).● SND_MIXER_READ_GROUP_ADD — the group was added (i.e. created).● SND_MIXER_READ_GROUP_REMOVE — the group was removed (i.e. destroyed).
<i>gid</i>	A pointer to a <code>snd_mixer_gid_t</code> structure that holds the ID of the group affected by the event.

Examples:

```

static void
mixer_callback_group (void *private_data, int cmd, snd_mixer_gid_t * gid)
{
    Control_t *control, *prev;
    PtWidget_t *above_wgt;
    int i;

    switch (cmd)
    {
    case SND_MIXER_READ_GROUP_VALUE:
        for (control = control_head; control; control = control->next)
        {
            if (strcmp (control->group.gid.name, gid->name) == 0 &&
                control->group.gid.index == gid->index)
            {
                if (snd_mixer_group_read (mixer_handle, &control->group) == 0)
                    base_update_control (control, NULL);
            }
        }
        break;

    case SND_MIXER_READ_GROUP_ADD:
        if ((control = mixer_create_control (gid, control_tail)))
        {
            if (control->group.caps & SND_MIXER_GRP_CAP_PLAY_GRP)
                above_wgt = PtWidgetBrotherBehind (ABW_base_capture_pane);
            else
                above_wgt = PtWidgetBrotherBehind (ABW_base_status);
            PtContainerHold (ABW_base_controls);
            base_create_control (ABW_base_controls, &above_wgt, control);
            PtContainerRelease (ABW_base_controls);
        }
        break;

    case SND_MIXER_READ_GROUP_REMOVE:
        for (prev = NULL, control = control_head; control;
            prev = control, control = control->next)
        {
            if (strcmp (control->group.gid.name, gid->name) == 0 &&
                control->group.gid.index == gid->index)
                mixer_delete_control (control, prev);
        }
        break;
    }
}

int

```

```
mixer_update (int fd, void *data, unsigned mode)
{
    snd_mixer_callbacks_t callbacks = { 0, 0, 0, 0 };

    callbacks.group = mixer_callback_group;
    snd_mixer_read (mixer_handle, &callbacks);
    return (Pt_CONTINUE);
}
```

Classification:

QNX Neutrino

See also:

`snd_mixer_eid_t`, `snd_mixer_gid_t`, `snd_mixer_read()`

snd_mixer_close()

© 2005, QNX Software Systems

Close a mixer handle

Synopsis:

```
#include <sys/asoundlib.h>

int snd_mixer_close( snd_mixer_t *handle );
```

Arguments:

handle The handle for the mixer device. This must have been created by *snd_mixer_open()*.

Library:

`libasound.so`

Description:

The *snd_mixer_close()* function frees all the resources allocated with the mixer handle and closes the connection to the sound mixer interface.

Returns:

Zero, or a negative value on error.

Errors:

-EBADF	Invalid file descriptor. Your <i>handle</i> may be corrupt.
-EINTR	The <i>close()</i> call was interrupted by a signal.
-EINVAL	Invalid <i>handle</i> argument.
-EIO	An I/O error occurred while updating the directory information.
-ENOSPC	A previous buffered write call has failed.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_mixer_open()

snd_mixer_eid_t

© 2005, QNX Software Systems

Mixer element ID structure

Synopsis:

```
typedef struct
{
    int32_t    type;
    int8_t     name[36];
    int32_t    index;
    uint8_t    reserved[124];    /* must be filled with zero */
}    snd_mixer_eid_t;
```

Description:

The `snd_mixer_eid_t` structure describes a mixer element's ID. The members include:

type The type of element.

name The name of the element.

index The index of the element.



We recommend that you work with mixer groups instead of manipulating the elements directly.

Classification:

QNX Neutrino

See also:

`snd_mixer_element_t`, `snd_mixer_elements()`,
`snd_mixer_group_t`, `snd_mixer_read()`, `snd_mixer_routes()`,
`snd_mixer_sort_eid_table()`, `snd_pcm_channel_info_t`,
`snd_pcm_channel_setup()`

Synopsis:

```
#include <sys/asoundlib.h>

int snd_mixer_element_read(
    snd_mixer_t *handle,
    snd_mixer_element_t *element );
```

Arguments:

handle The handle for the mixer device. This must have been created by *snd_mixer_open()*.

element A pointer to a **snd_mixer_element_t** in which *snd_mixer_element_read()* stores the element's configurable parameters.

Library:

libasound.so

Description:

The *snd_mixer_element_read()* function fills the **snd_mixer_element_t** structure with information on the current settings of the element identified by the **eid** substructure.



We recommend that you work with mixer groups instead of manipulating the elements directly.

Returns:

Zero on success, or a negative error value on error.

Errors:

-EINVAL Invalid *handle* or *element* argument.

-ENXIO The element wasn't found.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

The **element** struct must be initialized to a known state before making the call: use *memset()* to set the struct to zero, and then set the **eid** member to specify which element to read.

See also:

snd_mixer_element_t, *snd_mixer_element_write()*,
snd_mixer_elements()

Synopsis:

```

typedef struct snd_mixer_element
{
    snd_mixer_eid_t eid;
    union
    {
        snd_mixer_element_switch1      switch1;
        snd_mixer_element_switch2      switch2;
        snd_mixer_element_switch3      switch3;
        snd_mixer_element_volume1      volume1;
        snd_mixer_element_volume2      volume2;
        snd_mixer_element_accu3         accu3;
        snd_mixer_element_mux1         mux1;
        snd_mixer_element_mux2         mux2;
        snd_mixer_element_tone_control1  tc1;
        snd_mixer_element_3d_effect1    teffect1;
        snd_mixer_element_pan_control1   pc1;
        snd_mixer_element_pre_effect1    peffect1;
        uint8_t                          reserved[128]; /* mu
    } data;
    uint8_t reserved[128]; /* must be filled with zero */
} snd_mixer_element_t;

```

Description:

The `snd_mixer_element_t` structure contains the settings associated with a mixer element.



We recommend that you work with mixer groups instead of manipulating the elements directly.

Classification:

QNX Neutrino

See also:

`snd_mixer_eid_t`, `snd_mixer_element_read()`,
`snd_mixer_element_write()`

Synopsis:

```
#include <sys/asoundlib.h>

int snd_mixer_element_write(
    snd_mixer_t *handle,
    snd_mixer_element_t *element );
```

Arguments:

handle The handle for the mixer device. This must have been created by *snd_mixer_open()*.

element A pointer to a **snd_mixer_element_t** from which *snd_mixer_element_read()* sets the element's configurable parameters.

Library:

libasound.so

Description:

The *snd_mixer_element_write()* function writes the given **snd_mixer_element_t** structure to the driver.



We recommend that you work with mixer groups instead of manipulating the elements directly.

Returns:

Zero on success, or a negative value on error.

Errors:

-EBUSY The element has been modified by another application.

-EINVAL Invalid *handle* or *element* argument.

-ENXIO The element wasn't found.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

The write may fail with -EBUSY if another application has modified the element, and this application hasn't read that event yet using *snd_mixer_read()*.

See also:

snd_mixer_element_read(), **snd_mixer_element_t**,
snd_mixer_elements()

Synopsis:

```
#include <sys/asoundlib.h>

int snd_mixer_elements(
    snd_mixer_t *handle,
    snd_mixer_elements_t *elements );
```

Arguments:

handle The handle for the mixer device. This must have been created by *snd_mixer_open()*.

elements A pointer to a **snd_mixer_elements_t** structure in which *snd_mixer_elements()* stores the information about the elements.

Library:

libasound.so

Description:

The *snd_mixer_elements()* function fills the given **snd_mixer_elements_t** structure with the number of elements in the mixer that the handle was opened on. It also fills in the array of element IDs pointed to by *pelements* to a limit of *elements_size*.



We recommend that you work with mixer groups instead of manipulating the elements directly.

Before calling *snd_mixer_elements()*, set the **snd_mixer_elements_t** structure as follows:

pelements This pointer be NULL, or point to a valid storage location for the elements (i.e. an array of **snd_mixer_eid_t** structures).

elements_size This must reflect the size of the *pelements* storage location, in `sizeof(snd_mixer_eid_t)` units (i.e. *elements_size* must be the number of entries in the *pelements* array).

On a successful return, *snd_mixer_elements()* sets these members:

elements The total number of elements in the mixer.

pelements If non-NULL, the mixer element IDs are filled in.

elements_over The number of elements that couldn't be copied to the storage location.

Returns:

Zero on success, or a negative value on error.

Errors:

-EINVAL Invalid *handle*.

Classification:

QNX Neutrino

Safety

Cancellation point No

Interrupt handler No

Signal handler Yes

Thread Yes

See also:

snd_mixer_eid_t, *snd_mixer_element_read()*,
snd_mixer_element_write(), **snd_mixer_elements_t**,
snd_mixer_sort_eid_table()

Synopsis:

```
typedef struct snd_mixer_elements_s
{
    int32_t      elements, elements_size, elements_over;
    uint8_t      zero[4];          /* alignment -- zero fill */
    snd_mixer_eid_t *pelements;
    void         *pzero;          /* align pointers on 64-bits --> pointer */
    uint8_t      reserved[128];   /* must be filled with zero */
}      snd_mixer_elements_t;
```

Description:

The `snd_mixer_elements_t` structure describes all the elements in a mixer. You can fill in this structure by calling `snd_mixer_elements()`.



We recommend that you work with mixer groups instead of manipulating the elements directly.

The members of the `snd_mixer_elements_t` structure include:

<i>elements</i>	The total number of elements in the mixer.
<i>elements_size</i>	The size of the <i>pelements</i> storage location, in <code>sizeof(snd_mixer_eid_t)</code> units (i.e. the number of entries in the <i>pelements</i> array). Set this element before calling <code>snd_mixer_elements()</code> .
<i>elements_over</i>	The number of elements that couldn't be copied to the storage location.
<i>pelements</i>	NULL, or a pointer to an array of <code>snd_mixer_eid_t</code> structures. If <i>pelements</i> isn't NULL, <code>snd_mixer_elements()</code> stores the mixer element IDs in the array.

Classification:

QNX Neutrino

See also:

`snd_mixer_eid_t`, *snd_mixer_elements()*

snd_mixer_file_descriptor()

© 2005, QNX Software Systems

Return the file descriptor of the connection to the sound mixer interface

Synopsis:

```
#include <sys/asoundlib.h>

int snd_mixer_file_descriptor(
    snd_mixer_t *handle );
```

Arguments:

handle The handle for the mixer device. This must have been created by *snd_mixer_open()*.

Library:

`libasound.so`

Description:

The *snd_mixer_file_descriptor()* function returns the file descriptor of the connection to the sound mixer interface.

You should use this file descriptor with the *select()* synchronous multiplexer function (see the *QNX Library Reference*) to receive notification of mixer events. If data is waiting to be read, you can read in the events with *snd_mixer_read()*.

Returns:

The file descriptor of the connection to the mixer interface on success, or a negative error code.

Errors:

-EINVAL Invalid *handle* argument.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_mixer_read()

select() in the *QNX Library Reference*

snd_mixer_filter_t

© 2005, QNX Software Systems

Information about a mixer's filters

Synopsis:

```
typedef struct snd_mixer_filter
{
    uint32_t    enable;           /* bitfield of 1 << SND_MIXER_READ_*
    uint8_t     reserved[124];   /* must be filled with zero */
}    snd_mixer_filter_t;
```

Description:

The `snd_mixer_filter_t` structure describes the filters for a mixer. You can call `snd_mixer_set_filter()` to specify the events you want to track, and `snd_mixer_get_filter()` to determine which you're tracking.

Currently, the only member of this structure is *enable*, which is a mask of the mixer events. The bits in the mask include:

`SND_MIXER_READ_REBUILD`

The mixer has been rebuilt.

`SND_MIXER_READ_ELEMENT_VALUE`

An element's value has changed.

`SND_MIXER_READ_ELEMENT_CHANGE`

An element has changed in some way other than its value.

`SND_MIXER_READ_ELEMENT_ADD`

An element was added to the mixer.

`SND_MIXER_READ_ELEMENT_REMOVE`

An element was removed from the mixer.

`SND_MIXER_READ_ELEMENT_ROUTE`

A route was added or changed.

`SND_MIXER_READ_GROUP_VALUE`

A group's value has changed.

`SND_MIXER_READ_GROUP_CHANGE`

A group has changed in some way other than its value.

`SND_MIXER_READ_GROUP_ADD`

A group was added to the mixer.

`SND_MIXER_READ_GROUP_REMOVE`

A group was removed from the mixer.

Classification:

QNX Neutrino

See also:

snd_mixer_get_filter(), *snd_mixer_set_filter()*

snd_mixer_get_bit()

© 2005, QNX Software Systems

Return the boolean value of a single bit in the specified bitmap

Synopsis:

```
#include <sys/asoundlib.h>

int snd_mixer_get_bit( unsigned int *bitmap,
                      int bit );
```

Arguments:

bitmap The bitmap to test. Note that *bitmap* is an array and may be longer than 32 bits.

bit The index into *bitmap* of the bit to get.

Library:

`libasound.so`

Description:

The *snd_mixer_get_bit()* function is a convenience function that returns the value (0 or 1) of the bit specified by *bit* in the *bitmap*.

Returns:

The value of the specified bit (0 or 1).

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_mixer_set_bit()

snd_mixer_get_filter()

© 2005, QNX Software Systems

Get the current mask of mixer events that the driver is tracking

Synopsis:

```
#include <sys/asoundlib.h>

int snd_mixer_get_filter(
    snd_mixer_t *handle,
    snd_mixer_filter_t *filter );
```

Arguments:

handle The handle for the mixer device. This must have been created by *snd_mixer_open()*.

filter A pointer to a **snd_mixer_filter_t** structure that *snd_mixer_get_filter()* fills in with the mask.

Library:

libasound.so

Description:

The *snd_mixer_get_filter()* function fills the **snd_mixer_filter_t** structure with a mask of all mixer events for the mixer that the handle was opened on that the driver is tracking.

You can arrange to have your application receive notification when an event occurs by calling *select()* on the mixer's file descriptor, which you can get by calling *snd_mixer_file_descriptor()*. You can use *snd_mixer_read()* to read the event's data.

Returns:

Zero on success, or a negative value on error.

Errors:

-EINVAL Invalid *handle* or *filter* is NULL.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

`snd_mixer_filter_t`, `snd_mixer_read()`, `snd_mixer_set_filter()`

snd_mixer_gid_t

© 2005, QNX Software Systems

Mixer group ID structure

Synopsis:

```
typedef struct
{
    int32_t    type;
    int8_t     name[32];
    int32_t    index;
    uint8_t    reserved[128];    /* must be filled with zero */
}    snd_mixer_gid_t;
```

Description:

The `snd_mixer_gid_t` structure describes a mixer group's ID. The members include:

type The group's type. Not currently used; set it to 0.

name The group's name.

index The group's index number.

Classification:

QNX Neutrino

See also:

`snd_mixer_group_read()`, `snd_mixer_group_t`, `snd_mixer_groups()`,
`snd_mixer_sort_gid_table()`, `snd_pcm_channel_info_t`,
`snd_pcm_channel_setup()`

Synopsis:

```
#include <sys/asoundlib.h>

int snd_mixer_group_read(
    snd_mixer_t *handle,
    snd_mixer_group_t *group );
```

Arguments:

- handle* The handle for the mixer device. This must have been created by *snd_mixer_open()*.
- group* A pointer to a **snd_mixer_group_t** structure that *snd_mixer_group_read()* fills in with information about the mixer group.

Library:

libasound.so

Description:

The *snd_mixer_group_read()* function reads the **snd_mixer_group_t** structure for the group identified by the *gid* substructure (for more information, see **snd_mixer_gid_t**).



You must initialize the *gid* substructure before calling this function.

Returns:

Zero on success, or a negative error value on error.

Errors:

- EINVAL Invalid *handle* argument.
- ENXIO The group wasn't found.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

The **group** struct must be initialized to a known state before making the call: use *memset()* to set the struct to zero, and then set the **gid** member to specify which group to read.

See also:

snd_mixer_gid_t, *snd_mixer_group_t*,
snd_mixer_group_write(), *snd_mixer_groups()*

Synopsis:

```

typedef struct snd_mixer_group_s
{
    snd_mixer_gid_t gid;
    uint32_t caps;
    uint32_t channels;
    int32_t min, max;
    union
    {
        int32_t values[32];
        struct
        {
            int32_t front_left;
            int32_t front_right;
            int32_t front_center;
            int32_t rear_left;
            int32_t rear_right;
            int32_t woofer;
            uint8_t reserved[128]; /* must be filled with zero */
        } names;
    } volume;
    uint32_t mute;
    uint32_t capture;
    int32_t capture_group;

    int32_t elements_size, elements, elements_over;
    snd_mixer_eid_t *pelements;
    void *pzero; /* align pointers on 64-b
    uint8_t reserved[128]; /* must be filled with zero */
} snd_mixer_group_t;

```

Description:

The `snd_mixer_group_t` structure is the control structure for a mixer group. You can get the information for a group by calling `snd_mixer_group_read()`, and set it by calling `snd_mixer_group_write()`.

The members of this structure include:

<i>gid</i>	A <code>snd_mixer_gid_t</code> structure that identifies the group. This structure includes the group name and index.
<i>caps</i>	<p>The capabilities of the group, expressed through any combination of these flags:</p> <ul style="list-style-type: none">• <code>SND_MIXER_GRP_CAP_VOLUME</code> — the group has at least one volume control.• <code>SND_MIXER_GRP_CAP_JOINTLY_VOLUME</code> — all channel volume levels for the group must be the same (ganged).• <code>SND_MIXER_GRP_CAP_MUTE</code> — the group has at least one mute control.• <code>SND_MIXER_GRP_CAP_JOINTLY_MUTE</code> — all channel mute settings for the group must be the same (ganged).• <code>SND_MIXER_GRP_CAP_CAPTURE</code> — the group can be captured (recorded).• <code>SND_MIXER_GRP_CAP_JOINTLY_CAPTURE</code> — all channel capture settings for the group must be the same (ganged).• <code>SND_MIXER_GRP_CAP_EXCL_CAPTURE</code> — only one group on this device can be captured at a time.• <code>SND_MIXER_GRP_CAP_PLAY_GRP</code> — the group is a playback group.• <code>SND_MIXER_GRP_CAP_CAP_GRP</code> — the group is a capture group.• <code>SND_MIXER_GRP_CAP_SUBCHANNEL</code> — the group is a subchannel control. It exists only while a PCM subchannel is allocated by an application.
<i>channels</i>	The mapped bits that correspond to the channels contained in this group.

For example, for stereo right and left speakers, bits 1 and 2 (00011) are mapped; for the center speaker, bit 3 (00100) is mapped.

min, max The minimum and maximum values that define the volume range. Note that the minimum doesn't have to be zero.

volume A structure that contains the volume level for each channel in the group. You can access the values accessed directly by name or indirectly through the array of values.



If the group is jointly volumed, all volume values must be the same; setting different values results in undefined behavior.

mute The mute state of the group channels. If the bit corresponding to the channel is set, the channel is muted.



If the group is jointly muted, all mute bits must be the same; setting the bits differently results in undefined behavior.

capture The capture state of the group channels. If the bit corresponding to the channel is set, the channel is being captured. If the group is exclusively capture, setting capture on this group means that another group is no longer being captured.



If the group is jointly captured, all capture bits must be the same; setting the bits differently results in undefined behavior.

capture_group Not currently used.

elements_size The size of the memory block pointed to by *pelements* in units of `snd_mixer_eid_t`.

elements The number of element IDs that are currently valid in *pelements*.

elements_over The number of element IDs that were not returned in *pelements* because it wasn't large enough.

pelements A pointer to a region of memory (allocated by the calling application) that's used to store an array of element IDs. This is an array of **snd_mixer_eid_t** structures.

The elements that are returned are the component elements that make up the group identified by *gid*.

Classification:

QNX Neutrino

See also:

snd_mixer_eid_t, **snd_mixer_gid_t**, *snd_mixer_group_read()*,
snd_mixer_group_write()

Synopsis:

```
#include <sys/asoundlib.h>

int snd_mixer_group_write(
    snd_mixer_t *handle,
    snd_mixer_group_t *group );
```

Arguments:

handle The handle for the mixer device. This must have been created by *snd_mixer_open()*.

group A pointer to a **snd_mixer_group_t**, structure that contains the information you want to set for the mixer group.

Library:

libasound.so

Description:

The *snd_mixer_group_write()* function writes the **snd_mixer_group_t** structure to the driver. This structure contains the volume levels and mutes associated with the group.

Returns:

Zero on success, or a negative value on error.

Errors:

-EBUSY The group has been modified by another application.

-EINVAL Invalid *handle* argument.

-ENXIO The group wasn't found.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

The write may fail with -EBUSY if another application has modified the group, and this application hasn't read that event yet using *snd_mixer_read()*.

See also:

snd_mixer_group_read(), **snd_mixer_group_t**, *snd_mixer_groups()*

Synopsis:

```
#include <sys/asoundlib.h>

int snd_mixer_groups( snd_mixer_t *handle,
                    snd_mixer_groups_t *groups );
```

Arguments:

- handle* The handle for the mixer device. This must have been created by *snd_mixer_open()*.
- groups* A pointer to a **snd_mixer_groups_t** structure that *snd_mixer_groups()* fills in with information about the groups.

Library:

libasound.so

Description:

The *snd_mixer_groups()* function fills the given **snd_mixer_groups_t** structure with the number of groups in the mixer that the handle was opened on. It also fills in the array of group IDs pointed to by *pgroups* to a limit of *groups_size*.

Before calling *snd_mixer_groups()*, set the members of the **snd_mixer_groups_t** as follows:

- pgroups* This pointer must be NULL or point to a valid storage location for the groups (i.e. an array of **snd_mixer_gid_t** structures).
- groups_size* The size of the *pgroups* storage location in **sizeof(snd_mixer_gid_t)** units (i.e. the number of entries in the array).

On a successful return, *snd_mixer_groups()* fills in these members:

<i>groups</i>	The total groups in the mixer.
<i>groups_over</i>	The number of groups that couldn't be copied to the storage location.

Returns:

Zero on success, or a negative value on error.

Errors:

-EINVAL Invalid *handle*.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_mixer_gid_t, *snd_mixer_group_read()*,
snd_mixer_group_write(), *snd_mixer_groups_t*,
snd_mixer_sort_gid_table()

Synopsis:

```
typedef struct snd_mixer_groups_s
{
    int32_t      groups, groups_size, groups_over;
    uint8_t      zero[4];                /* alignment -- zero fill */
    snd_mixer_gid_t *pgroups;
    void         *pzero;                /* align pointers on 64-b */
    uint8_t      reserved[128];        /* must be filled with zero */
}          snd_mixer_groups_t;
```

Description:

The **snd_mixer_groups_t** structure holds information about all of the mixer groups. You can fill this structure by calling *snd_mixer_groups()*.

The members of this structure include:

<i>groups</i>	The number of groups in the mixer.
<i>groups_size</i>	The size of the <i>pgroups</i> storage location in sizeof(snd_mixer_gid_t) units (i.e. the number of entries in the array). Set this before calling <i>snd_mixer_groups()</i> .
<i>groups_over</i>	The number of groups that wouldn't fit in the <i>pgroups</i> array.
<i>pgroups</i>	NULL, or an array of snd_mixer_gid_t structures.

If *pgroups* isn't NULL, *snd_mixer_groups()* stores the group IDs in the array.

Classification:

QNX

See also:

snd_mixer_groups()

Synopsis:

```
#include <sys/asoundlib.h>

int snd_mixer_info( snd_mixer_t *handle,
                   snd_mixer_info_t *info );
```

Arguments:

- handle* The handle for the mixer device. This must have been created by *snd_mixer_open()*.
- info* A pointer to a **snd_mixer_info_t** structure that *snd_mixer_info()* fills in with the information about the mixer device.

Library:

libasound.so

Description:

The *snd_mixer_info()* function fills the *info* structure with information about the mixer device, including the:

- device name
- device type
- number of mixer groups and elements the mixer contains.

Returns:

Zero on success, or a negative value on error.

Errors:

-EINVAL Invalid *handle*.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

`snd_mixer_info_t`

Synopsis:

```
typedef struct snd_mixer_info_s
{
    uint32_t    type;
    uint32_t    attrib;
    uint32_t    elements;
    uint32_t    groups;
    int8_t      id[64];
    int8_t      name[64];
    uint8_t     reserved[128];    /* must be filled with zero */
}    snd_mixer_info_t;
```

Description:

The `snd_mixer_info_t` structure describes information about a mixer. You can fill this structure by calling `snd_mixer_info()`.

The members include:

<i>type</i>	The sound card type. Deprecated; don't use this member.
<i>attrib</i>	Not used.
<i>elements</i>	The total number of mixer elements in this mixer device.
<i>groups</i>	The total number of mixer groups in this mixer device.
<i>id[64]</i>	The ID of this PCM device (user selectable).
<i>name[64]</i>	The name of the device.

Classification:

Photon

See also:

snd_mixer_info()

*Create a connection and handle to a specified mixer device***Synopsis:**

```
#include <sys/asoundlib.h>

int snd_mixer_open( snd_mixer_t **handle,
                   int card,
                   int device );
```

Arguments:

handle A pointer to a location where *snd_mixer_open()* stores a handle for the mixer device.

card The card number.

device The device number.

Library:

libasound.so

Description:

The *snd_mixer_open()* function creates a connection and handle to the mixer device specified by the *card* and *device* number. You'll use this handle when calling the other *snd_mixer_** functions.

Returns:

Zero on success, or a negative value on error.

Errors:

-EACCES Search permission is denied on a component of the path prefix, or the device exists and the permissions specified are denied.

-EINTR The *open()* operation was interrupted by a signal.

-EMFILE Too many file descriptors are currently in use by this process.

- ENFILE Too many files are currently open in the system.
- ENOENT The named device doesn't exist.
- ENOMEM No memory available for data structure.
- SND_ERROR_INCOMPATIBLE_VERSION
 The audio driver version is incompatible with the
 client library that the application is using.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_mixer_close()

Synopsis:

```
#include <sys/asoundlib.h>

int snd_mixer_read(
    snd_mixer_t *handle,
    snd_mixer_callbacks_t *callbacks );
```

Arguments:

handle The handle for the mixer device. This must have been created by *snd_mixer_open()*.

callbacks A pointer to a *snd_mixer_callbacks_t* structure that defines the list of callbacks.

Library:

libasound.so

Description:

The *snd_mixer_read()* function reads pending mixer events from the mixer handle. As each event is read, the list of callbacks is checked for a handler for this event. If a match is found, the callback is invoked. This function is usually called when the *select()* library call indicates that there is data to be read on the mixer's file descriptor.

Returns:

The number of events read from the handle, or a negative value on error.

Errors:

-EBADF Invalid file descriptor. Your *handle* may be corrupt.

-EINTR The read operation was interrupted by a signal, and either no data was transferred, or the resource manager responsible for that file doesn't report partial transfers.

-EIO An event I/O error occurred.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_mixer_callbacks_t, *snd_mixer_eid_t*,
snd_mixer_file_descriptor(), *snd_mixer_get_filter()*,
snd_mixer_set_filter()

Synopsis:

```
#include <sys/asoundlib.h>

int snd_mixer_routes( snd_mixer_t *handle,
                    snd_mixer_routes_t *routes );
```

Arguments:

handle The handle for the mixer device. This must have been created by *snd_mixer_open()*.

routes A pointer to a **snd_mixer_routes_t** structure that *snd_mixer_routes()* fills in with information about the routes.

Library:

libasound.so

Description:

The *snd_mixer_routes()* function fills the given **snd_mixer_routes_t** structure with the number of routes in the mixer that the handle was opened on. It also fills in the array of route IDs pointed to by *proutes* to a limit of *routes_size*.



We recommend that you work with mixer groups instead of manipulating the elements directly.

Before calling *snd_mixer_routes()*, set the members of this structure as follows:

proutes This pointer must be NULL, or point to a valid storage location for the routes (i.e. an array of **snd_mixer_eid_t** structures).

routes_size The size of this storage location in **sizeof(snd_mixer_eid_t)** units (i.e. the number of entries in the *proutes* array).

On a successful return, the function sets these members:

- routes* The total number of routes in the mixer.
- routes_over* The number of routes that couldn't be copied to the storage location.
- proutes* The list of routes.

Returns:

Zero on success, or a negative value on error.

Errors:

- EINVAL Invalid *handle*.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

`snd_mixer_eid_t`, `snd_mixer_elements()`, `snd_mixer_groups()`,
`snd_mixer_routes_t`

Synopsis:

```
typedef struct snd_mixer_routes_s
{
    int32_t      routes, routes_size, routes_over;
    uint8_t      zero[4];          /* alignment -- zero fill */
    snd_mixer_eid_t *proutes;
    void         *pzero;          /* align pointers on 64-bits --> */
    uint8_t      reserved[128];   /* must be filled with zero */
}      snd_mixer_routes_t;
```

Description:

The **snd_mixer_routes_t** structure describes all of the routes in a mixer. You can fill this structure by calling *snd_mixer_routes()*.



We recommend that you work with mixer groups instead of manipulating the elements directly.

The members of the **snd_mixer_routes_t** structure include:

<i>routes</i>	The total number of routes in the mixer.
<i>routes_size</i>	The size of this storage location in sizeof(snd_mixer_eid_t) units (i.e. the number of entries in the <i>proutes</i> array). Set this member before calling <i>snd_mixer_routes()</i> .
<i>routes_over</i>	The number of routes that couldn't be copied to the storage location.
<i>proutes</i>	NULL, or an array of snd_mixer_eid_t structures. If <i>proutes</i> isn't NULL, <i>snd_mixer_routes()</i> stores the route IDs in the array.

Classification:

Photon

See also:

snd_mixer_routes()

Set the boolean value of a single bit in the specified bitmap

Synopsis:

```
#include <sys/asoundlib.h>

void snd_mixer_set_bit( unsigned int *bitmap,
                       int bit,
                       int val );
```

Arguments:

bitmap The bitmap to set. Note that *bitmap* is an array and may be longer than 32 bits.

bit The index into *bitmap* of the bit to set.

val The boolean value to store in the bit. Any *value* other than zero causes the bit to be set; a *value* of zero causes it to be cleared.

Library:

`libasound.so`

Description:

The *snd_mixer_set_bit()* function is a convenience function that sets the value (0 or 1) of the bit specified by *bit* in the *bitmap*.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_mixer_get_bit()

Synopsis:

```
#include <sys/asoundlib.h>

int snd_mixer_set_filter(
    snd_mixer_t *handle,
    snd_mixer_filter_t *filter );
```

Arguments:

handle The handle for the mixer device. This must have been created by *snd_mixer_open()*.

filter A pointer to a **snd_mixer_filter_t** structure that defines a mask of events to track.

Library:

libasound.so

Description:

The *snd_mixer_set_filter()* function uses the **snd_mixer_filter_t** structure to set the mask of all mixer events for the mixer that the handle was opened on that the driver will track. Only those events that are specified in the mask are tracked; all others are discarded as they occur.

You can arrange to have your application receive notification when an event occurs by calling *select()* on the mixer's file descriptor, which you can get by calling *snd_mixer_file_descriptor()*. You can use *snd_mixer_read()* to read the event's data.

Returns:

Zero on success, or a negative value on error.

Errors:

-EINVAL Invalid *handle* or *filter* is NULL.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_mixer_file_descriptor(), **snd_mixer_filter_t**,
snd_mixer_get_filter(), *snd_mixer_read()*

Synopsis:

```
#include <sys/asoundlib.h>

void snd_mixer_sort_eid_table(
    snd_mixer_eid_t *list,
    int count,
    snd_mixer_weight_entry_t *table );
```

Arguments:

- list* A pointer to the list of `snd_mixer_eid_t`, structures that you want to sort.
- count* The number of entries in the list.
- table* A pointer to an array of `snd_mixer_weight_entry_t` structures that defines the relative weights for the elements.
- Most applications use the default table weight structure, `snd_mixer_default_weights`.

Library:

`libasound.so`

Description:

The `snd_mixer_sort_eid_table()` function sorts a list of `eid` (element id structures) based on the names and the relative weights specified by the weight table.



We recommend that you work with mixer groups instead of manipulating the elements directly.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	No
Thread	Yes

See also:

`snd_mixer_eid_t`, `snd_mixer_elements()`,
`snd_mixer_weight_entry_t`

Synopsis:

```
#include <sys/asoundlib.h>

void snd_mixer_sort_gid_table(
    snd_mixer_gid_t *list,
    int count,
    snd_mixer_weight_entry_t *table );
```

Arguments:

list The list of `snd_mixer_gid_t` structures that you want to sort.

count The number of entries in the list.

table A pointer to an array of `snd_mixer_weight_entry_t` structures that defines the relative weights for the groups.

Most applications use the default table weight structure, *snd_mixer_default_weights*.

Library:

`libasound.so`

Description:

The *snd_mixer_sort_gid_table()* function sorts a list of `gid` (group id structures) based on the names and the relative weights specified by the weight table.

Classification:

QNX Neutrino

Safety

Cancellation point No

continued...

Safety

Interrupt handler	No
Signal handler	No
Thread	Yes

See also:

`snd_mixer_gid_t`, `snd_mixer_groups()`,
`snd_mixer_weight_entry_t`

Synopsis:

```
typedef struct {  
    char *name;  
    int weight;  
} snd_mixer_weight_entry_t;
```

Description:

The `snd_mixer_weight_entry_t` structure defines the weights that `snd_mixer_sort_eid_table()` and `snd_mixer_sort_gid_table()` use to sort mixer element and group IDs. The members include:

name The name of the mixer element or group.
weight The weight to use when sorting.

Classification:

Photon

See also:

`snd_mixer_sort_eid_table()`, `snd_mixer_sort_gid_table()`

snd_pcm_build_linear_format()

© 2005, QNX Software Systems

Encode a linear format value

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_build_linear_format( int width,
                                int unsigned,
                                int big_endian );
```

Arguments:

width The width; one of 8, 16, 24, or 32.

unsigned 0 for signed; 1 for unsigned.

big_endian 0 for little endian; 1 for big endian.

Library:

`libasound.so`

Description:

The *snd_pcm_build_linear_format()* function returns the linear format value encoded from the given components. For a list of the supported linear formats, see *snd_pcm_format_linear()*.

Returns:

A positive value (`SND_PCM_SFMT_*`) on success, or -1 if the arguments are invalid.

Classification:

QNX Neutrino

Safety

Cancellation point No

continued...

Safety

Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_format_big_endian(), *snd_pcm_format_linear()*,
snd_pcm_format_little_endian(), *snd_pcm_format_signed()*,
snd_pcm_format_size(), *snd_pcm_format_unsigned()*,
snd_pcm_format_width(), *snd_pcm_get_format_name()*

snd_pcm_capture_flush()

© 2005, QNX Software Systems

Discard all pending data in a PCM capture channel's queue and stop the channel

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_capture_flush( snd_pcm_t *handle );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

Library:

`libasound.so`

Description:

The *snd_pcm_plugin_flush()* function throws away all unprocessed data in the driver queue.

If the operation is successful (zero is returned), the channel's state is changed to `SND_PCM_STATUS_READY`, and the channel is stopped.

Returns:

Zero on success, or a negative error code.

Errors:

-EBADFD The pcm device state isn't ready.

-EINTR The driver isn't processing the data (Internal Error).

-EINVAL Invalid *handle*.

-EIO An invalid channel was specified, or the data wasn't all flushed.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_channel_flush(), *snd_pcm_playback_drain()*,
snd_pcm_playback_flush(), *snd_pcm_plugin_flush()*

snd_pcm_capture_prepare()

© 2005, QNX Software Systems

Signal the driver to ready the capture channel

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_capture_prepare( snd_pcm_t *handle );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

Library:

`libasound.so`

Description:

The *snd_pcm_capture_prepare()* function prepares hardware to operate in a specified transfer direction. This call is responsible for all parts of the hardware's startup sequence that require additional initialization time, allowing the final "GO" (usually from writes into the buffers) to execute more quickly.

You can call this function in all states except `SND_PCM_STATUS_NOTREADY` (returns `-EBADFD`) and `SND_PCM_STATUS_RUNNING` state (returns `-EBUSY`). If the operation is successful (zero is returned), the driver state is changed to `SND_PCM_STATUS_PREPARED`.



If your channel has overrun, you have to reprepare it before continuing. For an example, see `waverec.c` example in the appendix.

Returns:

Zero on success, or a negative error code.

Errors:

-EINVAL Invalid *handle*.
-EBUSY Channel is running.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_channel_prepare(), *snd_pcm_playback_prepare()*,
snd_pcm_plugin_prepare()

snd_pcm_channel_flush()

© 2005, QNX Software Systems

Flush all pending data in a PCM channel's queue and stop the channel

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_channel_flush( snd_pcm_t *handle,
                          int channel );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

channel The channel; SND_PCM_CHANNEL_CAPTURE or SND_PCM_CHANNEL_PLAYBACK.

Library:

libasound.so

Description:

The *snd_pcm_plugin_flush()* function flushes all unprocessed data in the driver queue by calling *snd_pcm_capture_flush()* or *snd_pcm_playback_flush()*, depending on the value of *channel*.

Returns:

Zero on success, or a negative error code.

Errors:

-EBADFD The pcm device state isn't ready.

-EINTR The driver isn't processing the data (Internal Error).

-EINVAL Invalid *handle*.

-EIO An invalid channel was specified, or the data wasn't all flushed.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_capture_flush(), *snd_pcm_playback_drain()*,
snd_pcm_playback_flush(), *snd_pcm_plugin_flush()*

snd_pcm_channel_info()

© 2005, QNX Software Systems

Get information about a PCM channel's current capabilities

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_channel_info(
    snd_pcm_t *handle,
    snd_pcm_channel_info_t *info );
```

Arguments:

- handle* The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.
- info* A pointer to a **snd_pcm_channel_info_t** structure that *snd_pcm_channel_info()* fills with information about the PCM channel.
- Before calling this function, set the *info* structure's *channel* member to specify the direction. This function sets all the other members.

Library:

libasound.so

Description:

The *snd_pcm_channel_info()* function fills the *info* structure with the current capabilities of the PCM channel selected by *handle*.



This function and the plugin-aware version, *snd_pcm_plugin_info()*, get a dynamic “snapshot” of the system's current capabilities, which can shrink and grow as subchannels are allocated and freed. They're similar to *snd_ctl_pcm_channel_info()*, which gets information about the *complete* capabilities of the system.

Returns:

Zero on success, or a negative error code.

Errors:

-EINVAL Invalid *handle*.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_ctl_pcm_channel_info(), *snd_pcm_channel_info_t*,
snd_pcm_plugin_info()

snd_pcm_channel_info_t

© 2005, QNX Software Systems

Information structure for a PCM channel

Synopsis:

```
typedef struct snd_pcm_channel_info
{
    int32_t      subdevice;
    int8_t       subname[36];
    int32_t      channel;
    int32_t      zero1;
    int32_t      zero2[4];
    uint32_t     flags;
    uint32_t     formats;
    uint32_t     rates;
    int32_t      min_rate;
    int32_t      max_rate;
    int32_t      min_voices;
    int32_t      max_voices;
    int32_t      max_buffer_size;
    int32_t      min_fragment_size;
    int32_t      max_fragment_size;
    int32_t      fragment_align;
    int32_t      fifo_size;
    int32_t      transfer_block_size;
    uint8_t      zero3[4];

    snd_pcm_digital_t dig_mask;
    uint32_t      zero4;
    int32_t      mixer_device;
    snd_mixer_eid_t mixer_eid;
    snd_mixer_gid_t mixer_gid;
    uint8_t      reserved[128];
}      snd_pcm_channel_info_t;
```

Description:

The `snd_pcm_channel_info_t` structure describes PCM channel information. The members include:

subdevice The subdevice number.

subname[32] The subdevice name.

<i>channel</i>	The channel direction; either SND_PCM_CHANNEL_CAPTURE or SND_PCM_CHANNEL_PLAYBACK.
<i>flags</i>	Any combination of: <ul style="list-style-type: none">• SND_PCM_CHNINFO_BLOCK — the hardware supports block mode.• SND_PCM_CHNINFO_BLOCK_TRANSFER — the hardware transfers samples by chunks (for example PCI burst transfers).• SND_PCM_CHNINFO_INTERLEAVE — the hardware accepts audio data composed of interleaved samples.• SND_PCM_CHNINFO_MMAP — the hardware supports mmap access.• SND_PCM_CHNINFO_MMAP_VALID — fragment samples are valid during transfer. This means that the fragment samples may be used when the <i>io</i> member from the mmap control structure snd_pcm_mmap_control_t is set (the fragment is being transferred).• SND_PCM_CHNINFO_NONINTERLEAVE — the hardware accepts audio data composed of noninterleaved samples.• SND_PCM_CHNINFO_OVERRANGE — the hardware supports ADC (capture) overrange detection.• SND_PCM_CHNINFO_PAUSE — the hardware supports pausing of the DMA engines (playback only).

☞ Note that the absence of this flag does not preclude the synthesis of an application-level pause. It refers only to the direct capabilities of the hardware. Support for this flag is extremely rare, so dependence on it is discouraged.

<i>formats</i>	The supported formats (SND_PCM_FMT_*).
<i>rates</i>	Hardware rates (SND_PCM_RATE_*).
<i>min_rate</i>	The minimum rate (in Hz).
<i>max_rate</i>	The maximum rate (in Hz).
<i>min_voices</i>	The minimum number of voices (probably always 1).
<i>max_voices</i>	The maximum number of voices.
<i>max_buffer_size</i>	The maximum buffer size, in bytes.
<i>min_fragment_size</i>	The minimum fragment size, in bytes.
<i>max_fragment_size</i>	The maximum fragment size, in bytes.
<i>fragment_align</i>	If this value is set, the size of the buffer fragments must be a multiple of this value, so that they are in the proper alignment.
<i>fifo_size</i>	The stream FIFO size, in bytes. Deprecated; don't use this member.
<i>transfer_block_size</i>	The bus transfer block size in bytes.
<i>dig_mask</i>	Not currently implemented.
<i>mixer_device</i>	The mixer device for this channel.

<i>mixer_eid</i>	A snd_mixer_eid_t structure that describes the mixer element identification for this channel.
<i>mixer_gid</i>	<p>The mixer group identification for this channel; see snd_mixer_gid_t. You should use this mixer group in applications that are implementing their own volume controls.</p> <p>This mixer group is guaranteed to be the lowest-level mixer group for your channel (or subchannel), as determined at the time that you call <i>snd_ctl_pcm_channel_info()</i>. If you call this function after the channel has been configured, and a subchannel has been allocated (i.e. after calling <i>snd_pcm_channel_params()</i>), this mixer group is the subchannel mixer group that's specific to the application's current subchannel.</p>

Classification:

QNX Neutrino

See also:*snd_ctl_pcm_channel_info()*, **snd_mixer_eid_t**,
snd_mixer_gid_t, *snd_pcm_channel_info()*, *snd_pcm_plugin_info()*

snd_pcm_channel_params()

© 2005, QNX Software Systems

Set a PCM channel's configurable parameters

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_channel_params(
    snd_pcm_t *handle,
    snd_pcm_channel_params_t *params );
```

Arguments:

- handle* The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.
- params* A pointer to a **snd_pcm_channel_params_t** structure in which you've specified the PCM channel's configurable parameters. All members are write-only.

Library:

libasound.so

Description:

The *snd_pcm_channel_params()* function sets up the transfer parameters according to the *params* structure.

You can call the function in SND_PCM_STATUS_NOTREADY (initial) and SND_PCM_STATUS_READY states; otherwise, *snd_pcm_channel_params()* returns -EBADFD.

If the parameters are valid (i.e. *snd_pcm_channel_params()* returns zero), the driver state is changed to SND_PCM_STATUS_READY.

Returns:

Zero on success, or a negative value on error.

Errors:

-EINVAL Invalid *handle* or *params*

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

`snd_pcm_channel_params_t`, `snd_pcm_channel_setup()`,
`snd_pcm_open()`, `snd_pcm_open_preferred()`,
`snd_pcm_plugin_params()`

snd_pcm_channel_params_t

© 2005, QNX Software Systems

PCM channel parameters

Synopsis:

```
typedef struct snd_pcm_channel_params
{
    int32_t          channel;
    int32_t          mode;
    snd_pcm_sync_t   sync;           /* hardware synchronization */
    snd_pcm_format_t format;
    snd_pcm_digital_t digital;
    int32_t          start_mode;
    int32_t          stop_mode;
    int32_t          time:1, ust_time:1;
    uint32_t         why_failed;     /* SND_PCM_PARAMS_BAD_??? */
    union
    {
        struct
        {
            int32_t    queue_size;
            int32_t    fill;
            int32_t    max_fill;
            uint8_t    reserved[124]; /* must be filled with zero */
        }            stream;
        struct
        {
            int32_t    frag_size;
            int32_t    frags_min;
            int32_t    frags_max;
            uint8_t    reserved[124]; /* must be filled with zero */
        }            block;
        uint8_t        reserved[128]; /* must be filled with zero */
    }                buf;
    uint8_t           reserved[128]; /* must be filled with zero */
}                    snd_pcm_channel_params_t;
```

Description:

The `snd_pcm_channel_params_t` structure describes the parameters of a PCM capture or playback channel. The members include:

<i>channel</i>	The channel direction; one of SND_PCM_CHANNEL_PLAYBACK or SND_PCM_CHANNEL_CAPTURE.
<i>mode</i>	The channel mode: SND_PCM_MODE_BLOCK. (SND_PCM_MODE_STREAM is deprecated.)
<i>format</i>	The data format; see snd_pcm_format_t .
<i>digital</i>	Not currently implemented.
<i>start_mode</i>	The start mode; one of: <ul style="list-style-type: none">• SND_PCM_START_DATA — start when some data is written (playback) or requested (capture).• SND_PCM_START_FULL — start when the whole queue is filled (playback only).• SND_PCM_START_GO — start on the Go command.
<i>stop_mode</i>	The stop mode; one of: <ul style="list-style-type: none">• SND_PCM_STOP_STOP — stop when an underrun or overrun occurs.• SND_PCM_STOP_ERASE — stop and erase the whole buffer when an overrun occurs (capture only).• SND_PCM_STOP_ROLLOVER — ROLLOVER (i.e. automatically reprepare and continue) when an underrun or overrun occurs.
<i>time</i>	If set, the driver offers, in the status structure, the time when the transfer began. The time is in the format used by <i>gettimeofday()</i> (see the QNX Neutrino <i>Library Reference</i>).
<i>ust_time</i>	If set, the driver offers, in the status structure, the time when the transfer began. The time is in UST format.
<i>sync</i>	The synchronization group. Not supported; don't use this member.

<i>queue_size</i>	The queue size, in bytes, for the stream mode. Not supported; don't use this member.
<i>fill</i>	The fill mode (SND_PCM_FILL_* constants). Not supported; don't use this member.
<i>max_fill</i>	The number of bytes to be filled ahead with silence. Not supported; don't use this member.
<i>frag_size</i>	The size of fragment in bytes.
<i>frags_min</i>	Depends on the mode: <ul style="list-style-type: none">• Capture — the minimum filled fragments to allow wakeup (usually one).• Playback — the minimum free fragments to allow wakeup (usually one).
<i>frags_max</i>	For playback, the maximum filled fragments to allow wakeup. This value specifies the total number of fragments that could be written to by an application. This excludes the fragment that's currently playing, so the actual total number of fragments is <i>frags_max</i> + 1.

Classification:

QNX Neutrino

See also:*snd_pcm_channel_params()*, **snd_pcm_format_t**

snd_pcm_channel_prepare()

Signal the driver to ready the specified channel

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_channel_prepare( snd_pcm_t *handle,
                             int channel );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

channel The channel; SND_PCM_CHANNEL_CAPTURE or SND_PCM_CHANNEL_PLAYBACK.

Library:

`libasound.so`

Description:

The *snd_pcm_channel_prepare()* function prepares hardware to operate in a specified transfer direction by calling *snd_pcm_capture_prepare()* or *snd_pcm_playback_prepare()*, depending on the value of *channel*.

This call is responsible for all parts of the hardware's startup sequence that require additional initialization time, allowing the final "GO" (usually from writes into the buffers) to execute more quickly.

This function may be called in all states except SND_PCM_STATUS_NOTREADY (returns -EBADFD) and SND_PCM_STATUS_RUNNING state (returns -EBUSY). If the operation is successful (zero is returned), the driver state is changed to SND_PCM_STATUS_PREPARED.



If your channel has underrun (during playback) or overrun (during capture), you have to reprepare it before continuing. For an example, see `wave.c` and `waverec.c` in the appendix.

Returns:

Zero on success, or a negative error code.

Errors:

- EINVAL Invalid *handle*.
- EBUSY Channel is running.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_capture_prepare(), *snd_pcm_playback_prepare()*,
snd_pcm_plugin_prepare()

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_channel_setup(
    snd_pcm_t *handle,
    snd_pcm_channel_setup_t *setup );
```

Arguments:

- handle* The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.
- setup* A pointer to a **snd_pcm_channel_setup_t** structure that *snd_pcm_channel_setup()* fills with information about the PCM channel setup.
- Set the *setup* structure's *channel* member to specify the direction. All other members are read-only.

Library:

libasound.so

Description:

The *snd_pcm_channel_setup()* function fills the *setup* structure with data about the PCM channel's configuration.

Returns:

Zero on success, or a negative error code.

Errors:

-EINVAL Invalid *handle*

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_channel_params(), *snd_pcm_channel_setup_t*,
snd_mixer_gid_t, *snd_pcm_open()*, *snd_pcm_open_preferred()*,
snd_pcm_plugin_setup()

Synopsis:

```

typedef struct snd_pcm_channel_setup
{
    int32_t          channel;
    int32_t          mode;
    snd_pcm_format_t format;
    snd_pcm_digital_t digital;
    union
    {
        struct
        {
            int32_t    queue_size;
            uint8_t    reserved[124]; /* must be filled with zero */
        }            stream;
        struct
        {
            int32_t    frag_size;
            int32_t    frags;
            int32_t    frags_min;
            int32_t    frags_max;
            uint8_t    reserved[128]; /* must be filled with zero */
        }            block;
    }                buf;
    int16_t          msbits_per_sample;
    int16_t          pad1;
    int32_t          mixer_device; /* mixer device */
    snd_mixer_eid_t  *mixer_eid; /* pcm source mixer element */
    snd_mixer_gid_t  *mixer_gid; /* lowest level mixer group subcl
    uint8_t          reserved[112]; /* must be filled with zero */
}                snd_pcm_channel_setup_t;

```

Description:

The `snd_pcm_channel_setup_t` structure describes the current configuration of a PCM channel. The members include:

channel The channel direction; One of
 SND_PCM_CHANNEL_PLAYBACK or
 SND_PCM_CHANNEL_CAPTURE.

<i>mode</i>	The channel mode: SND_PCM.MODE_BLOCK. (SND_PCM.MODE_STREAM is deprecated.)
<i>format</i>	The data format; see <code>snd_pcm_format_t</code> . Note that the <i>rate</i> member may differ from the requested one.
<i>digital</i>	Not currently implemented.
<i>queue_size</i>	The real queue size (which may differ from requested one).
<i>frag_size</i>	The real fragment size (which may differ from requested one).
<i>frags</i>	The number of fragments.
<i>frags_min</i>	Capture: the minimum filled fragments to allow wakeup. Playback: the minimum free fragments to allow wakeup.
<i>frags_max</i>	Playback: the maximum filled fragments to allow wakeup. The value also specifies the maximum number of used fragments plus one.
<i>msbits_per_sample</i>	How many most-significant bits are physically used.
<i>mixer_device</i>	Mixer device for this subchannel.
<i>mixer_eid</i>	A pointer to the mixer element identification for this subchannel.
<i>mixer_gid</i>	A pointer to the mixer group identification for this subchannel; see <code>snd_mixer_gid_t</code> .

Classification:

QNX Neutrino

See also:

`snd_mixer_gid_t`, `snd_pcm_channel_setup()`,
`snd_pcm_format_t`, `snd_pcm_plugin_setup()`

snd_pcm_channel_status()

© 2005, QNX Software Systems

Get the runtime status of a PCM channel

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_channel_status(
    snd_pcm_t *handle,
    snd_pcm_channel_status_t *status );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

status A pointer to a **snd_pcm_channel_status_t** structure that *snd_pcm_channel_status()* fills with information about the PCM channel's status.

Fill in the *status* structure's *channel* member to specify the direction. All other members are read-only.

Library:

libasound.so

Description:

The *snd_pcm_channel_status()* function fills the *status* structure with data about the PCM channel's runtime status.

Returns:

Zero on success, or a negative error code.

Errors:

-EBADFD The pcm device state isn't ready.

-EFAULT Failed to copy data.

-EINVAL Invalid *handle* or data pointer is NULL.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_channel_status_t, *snd_pcm_open()*,
snd_pcm_open_preferred(), *snd_pcm_plugin_status()*

snd_pcm_channel_status_t

© 2005, QNX Software Systems

PCM channel status structure

Synopsis:

```
typedef struct snd_pcm_channel_status
{
    int32_t      channel;
    int32_t      mode;
    int32_t      status;
    uint32_t     scount;
    struct timeval stime;
    uint64_t     ust_stime;
    int32_t      frag;
    int32_t      count;
    int32_t      free;
    int32_t      underrun;
    int32_t      overrun;
    int32_t      overrange;
    uint32_t     subbuffered;
    uint8_t      reserved[128]; /* must be filled with zero */
}      snd_pcm_channel_status_t;
```

Description:

The `snd_pcm_channel_status_t` structure describes the status of a PCM channel. The members include:

<i>channel</i>	The channel direction; one of <code>SND_PCM_CHANNEL_PLAYBACK</code> or <code>SND_PCM_CHANNEL_CAPTURE</code> .
<i>mode</i>	The transfer mode: <code>SND_PCM_MODE_BLOCK</code> . (<code>SND_PCM_MODE_STREAM</code> is deprecated.)
<i>status</i>	The channel status. Valid values are: <ul style="list-style-type: none">• <code>SND_PCM_STATUS_NOTREADY</code> — the driver isn't prepared for any operation. After a successful call to <code>snd_pcm_channel_params()</code>, the state is changed to <code>SND_PCM_STATUS_READY</code>.• <code>SND_PCM_STATUS_READY</code> — the driver is ready for operation. You can <code>mmap()</code> the audio buffer

only in this state, but the samples still can't be transferred. After a successful call to *snd_pcm_channel_prepare()*, *snd_pcm_capture_prepare()*, *snd_pcm_playback_prepare()*, or *snd_pcm_plugin_prepare()*, the state is changed to `SND_PCM_STATUS_PREPARED`.

- `SND_PCM_STATUS_PREPARED` — the driver is prepared for operation. The samples may be transferred in this state.
- `SND_PCM_STATUS_RUNNING` — the driver is actively transferring data through the hardware. The samples may be transferred in this state.
- `SND_PCM_STATUS_UNDERRUN` — the playback channel is in an underrun state. The driver completely drained the buffers before new data was ready to be played. You must reprepare the channel before continuing, by calling *snd_pcm_channel_prepare()*, *snd_pcm_playback_prepare()*, or *snd_pcm_plugin_prepare()*. See the `wave.c` example in the appendix.
- `SND_PCM_STATUS_OVERRUN` — the capture channel is in an overrun state. The driver has processed the incoming data faster than it's coming in; the channel is stalled. You must reprepare the channel before continuing, by calling *snd_pcm_channel_prepare()*, *snd_pcm_capture_prepare()*, or *snd_pcm_plugin_prepare()*. See the `waverec.c` example in the appendix.
- `SND_PCM_STATUS_PAUSED` — the playback is paused (not supported by QSA).

scount

The number of bytes processed since the playback/capture last started. This value is clipped

	when it reaches the SND_PCM.BOUNDARY value, and is reset when you prepare the channel.
<i>stime</i>	The playback/capture start time, in the format used by <i>gettimeofday()</i> (see the QNX Neutrino <i>Library Reference</i>). This member is valid only when the <i>time</i> flags is active in the snd_pcm_channel_params_t , structure.
<i>ust_stime</i>	The playback/capture start time, in UST format. This member is valid only when the <i>ust_time</i> flags is active in the snd_pcm_channel_params_t , structure.
<i>frag</i>	The current fragment number (available only in the block mode).
<i>count</i>	The number of bytes in the queue/buffer; see the note below.
<i>free</i>	The number of bytes in the queue that are still free; see the note below.
<i>underrun</i>	The number of playback underruns since the last status.
<i>overrun</i>	The number of capture overruns since the last status.
<i>overrange</i>	The number of ADC capture overrange detections since the last status.
<i>subbuffered</i>	The number of bytes subbuffered in the plugin interface.



The *count* and *free* members aren't used if the mmap plugin is used. To disable the mmap plugin, call *snd_pcm_plugin_set_disable()*.

Classification:

QNX Neutrino

snd_pcm_close()

© 2005, QNX Software Systems

Close a PCM handle and free its resources

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_close( snd_pcm_t *handle );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

Library:

`libasound.so`

Description:

The *snd_pcm_close()* function frees all resources allocated with the audio handle and closes the connection to the PCM interface.

Returns:

Zero on success, or a negative value on error.

Errors:

-EBADF	Invalid file descriptor. Your <i>handle</i> may be corrupt.
-EINTR	The <i>close()</i> call was interrupted by a signal.
-EINVAL	Invalid <i>handle</i> argument.
-EIO	An I/O error occurred while updating the directory information.
-ENOSPC	A previous buffered write call has failed.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_open(), *snd_pcm_open_preferred()*

snd_pcm_file_descriptor()

© 2005, QNX Software Systems

Return the file descriptor of the connection to the PCM interface

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_file_descriptor( snd_pcm_t *handle,
                           int channel );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

channel The channel; SND_PCM_CHANNEL_CAPTURE or SND_PCM_CHANNEL_PLAYBACK.

Library:

`libasound.so`

Description:

The *snd_pcm_file_descriptor()* function returns the file descriptor of the connection to the PCM interface.

You can use this file descriptor for the *select()* synchronous multiplexer function (see the *QNX Library Reference*).

Returns:

The file descriptor of the connection to the PCM interface on success, or a negative error code.

Errors:

-EINVAL Invalid *handle* argument.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

select() in the *QNX Library Reference*

snd_pcm_find()

© 2005, QNX Software Systems

Find all PCM devices in the system that meet the given criteria

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_find( unsigned int format,
                 int *number,
                 int *cards,
                 int *devices,
                 int mode );
```

Arguments:

- format* Any combination of the SND_PCM_FMT_* constants. Here are the most commonly used flags:
- SND_PCM_FMT_U8 — unsigned 8-bit PCM.
 - SND_PCM_FMT_S8 — signed 8-bit PCM.
 - SND_PCM_FMT_U16_LE — unsigned 16-bit PCM little endian.
 - SND_PCM_FMT_U16_BE — unsigned 16-bit PCM big endian.
 - SND_PCM_FMT_S16_LE — signed 16-bit PCM little endian.
 - SND_PCM_FMT_S16_BE — signed 16-bit PCM big endian.
 - SND_PCM_FMT_IEC958_SUBFRAME — S/PDIF data (AC3).
- number* The size of the card and device arrays that *cards* and *devices* point to. On return, *number* contains the total number of devices found.
- cards* An array in which *snd_pcm_find()* stores the numbers of the cards it finds.
- devices* An array in which *snd_pcm_find()* stores the numbers of the devices it finds.

- mode* One of the following:
- SND_PCM_OPEN_PLAYBACK — the playback channel.
 - SND_PCM_OPEN_CAPTURE — the capture channel.

Library:

`libasound.so`

Description:

The *snd_pcm_find()* function finds all PCM devices in the system that support any combination of the given *format* parameters in the given *mode*.

The card and device arrays are to be considered paired: the following uniquely defines the first PCM device:

card[0] + device[0]

Returns:

A positive integer representing the total number of devices found (same as *number* on return), or a negative value on error.

Errors:

-EINVAL Invalid *mode* or *format*.

Classification:

QNX Neutrino

Safety

Cancellation point No

continued...

Safety

Interrupt handler	No
Signal handler	Yes
Thread	Yes

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_format_big_endian( int format );
```

Arguments:

format The format number (one of the SND_PCM_SFMT_* constants). For a list of the supported formats, see *snd_pcm_get_format_name()*.

Library:

`libasound.so`

Description:

The *snd_pcm_format_big_endian()* function checks to see if *format* is big-endian.

Returns:

- 1 The format is in big-endian byte order.
- 0 The format isn't in big-endian byte order.

Otherwise, it returns a negative error code.

Errors:

-EINVAL Invalid *format* with respect to endianness.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_build_linear_format(), *snd_pcm_format_linear()*,
snd_pcm_format_little_endian(), *snd_pcm_format_signed()*,
snd_pcm_format_size(), *snd_pcm_format_unsigned()*,
snd_pcm_format_width(), *snd_pcm_get_format_name()*

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_format_linear( int format );
```

Arguments:

format The format number (one of the SND_PCM_SFMT_* constants). For a list of the supported formats, see *snd_pcm_get_format_name()*.

Library:

libasound.so

Description:

The *snd_pcm_format_linear()* function checks to see if the format is linear. The supported linear formats are:

- SND_PCM_SFMT_S8
- SND_PCM_SFMT_U8
- SND_PCM_SFMT_S16_LE
- SND_PCM_SFMT_U16_LE
- SND_PCM_SFMT_S16_BE
- SND_PCM_SFMT_U16_BE
- SND_PCM_SFMT_S24_LE
- SND_PCM_SFMT_U24_LE
- SND_PCM_SFMT_S24_BE
- SND_PCM_SFMT_U24_BE
- SND_PCM_SFMT_S32_LE

- SND_PCM_SFMT_U32_LE
- SND_PCM_SFMT_S32_BE
- SND_PCM_SFMT_U32_BE

For a list of all the supported formats, see *snd_pcm_get_format_name()*.

Returns:

- 1 The format is a linear format.
- 0 The format isn't a linear format.

Errors:

None.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_build_linear_format(), *snd_pcm_format_big_endian()*,
snd_pcm_format_little_endian(), *snd_pcm_format_signed()*,
snd_pcm_format_size(), *snd_pcm_format_unsigned()*,
snd_pcm_format_width(), *snd_pcm_get_format_name()*

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_format_little_endian( int format );
```

Arguments:

format The format number (one of the SND_PCM_SFMT_* constants). For a list of the supported formats, see *snd_pcm_get_format_name()*.

Library:

`libasound.so`

Description:

The *snd_pcm_format_little_endian()* function checks to see if *format* is little-endian.

Returns:

- 1 The format is in little-endian byte order.
- 0 The format isn't in little-endian byte order.

Otherwise, it returns a negative error code.

Errors:

-EINVAL Invalid *format* with respect to endianness.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_build_linear_format(), *snd_pcm_format_big_endian()*,
snd_pcm_format_signed(), *snd_pcm_format_size()*,
snd_pcm_format_unsigned(), *snd_pcm_format_width()*,
snd_pcm_get_format_name()

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_format_signed( int format );
```

Arguments:

format The format number (one of the SND_PCM_SFMT_* constants). For a list of the supported formats, see *snd_pcm_get_format_name()*.

Library:

`libasound.so`

Description:

The *snd_pcm_format_signed()* function checks for a signed format.

Returns:

- 1 The format is signed.
- 0 The format is unsigned.

Otherwise, it returns a negative error code.

Errors:

-EINVAL Invalid *format* with respect to sign.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_build_linear_format(), *snd_pcm_format_big_endian()*,
snd_pcm_format_little_endian(), *snd_pcm_format_size()*,
snd_pcm_format_unsigned(), *snd_pcm_format_width()*,
snd_pcm_get_format_name()

Synopsis:

```
#include <sys/asoundlib.h>

ssize_t snd_pcm_format_size( int format,
                             size_t num_samples );
```

Arguments:

<i>format</i>	The format number (one of the SND_PCM_SFMT_* constants). For a list of the supported formats, see <i>snd_pcm_get_format_name()</i> .
<i>num_samples</i>	The number of samples for which you want to determine the size.

Library:

`libasound.so`

Description:

The *snd_pcm_format_size()* function calculates the size, in bytes, of *num_samples* samples of data in the given format.

Returns:

A positive value on success, or a negative error code.

Errors:

`-EINVAL` Invalid *format*.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_build_linear_format(), *snd_pcm_format_big_endian()*,
snd_pcm_format_little_endian(), *snd_pcm_format_signed()*,
snd_pcm_format_unsigned(), *snd_pcm_format_width()*,
snd_pcm_get_format_name()

Synopsis:

```
typedef struct snd_pcm_format {
    int32_t  interleave: 1;
    int32_t  format;
    int32_t  rate;
    int32_t  voices;
    int32_t  special;
    uint8_t  reserved[124]; /* must be filled with zero */
} snd_pcm_format_t;
```

Description:

The **snd_pcm_format_t** structure describes the format of the PCM data. The members include:

<i>interleave</i>	If set, the sample data contains interleaved samples.
<i>format</i>	The format number (one of the SND_PCM_SFMT_* constants). For a list of the supported formats, see <i>snd_pcm_get_format_name()</i> .
<i>rate</i>	The requested rate, in Hz.
<i>voices</i>	The number of voices, in the range specified by the <i>min_voices</i> and <i>max_voices</i> members of the snd_pcm_channel_info_t structure. Typical values are 2 for stereo, and 1 for mono.
<i>special</i>	Special (custom) description of format. Use when SND_PCM_SFMT_SPECIAL is specified.

Classification:

QNX Neutrino

See also:

`snd_pcm_channel_info_t`, `snd_pcm_channel_params_t`,
`snd_pcm_get_format_name()`

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_format_unsigned( int format );
```

Arguments:

format The format number (one of the SND_PCM_SFMT_* constants). For a list of the supported formats, see *snd_pcm_get_format_name()*.

Library:

`libasound.so`

Description:

The *snd_pcm_format_unsigned()* function checks for an unsigned format.

Returns:

- 1 The format is unsigned.
- 0 The format is signed.

Otherwise, it returns a negative error code.

Errors:

-EINVAL Invalid *format* with respect to sign.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_build_linear_format(), *snd_pcm_format_big_endian()*,
snd_pcm_format_little_endian(), *snd_pcm_format_signed()*,
snd_pcm_format_size(), *snd_pcm_format_width()*,
snd_pcm_get_format_name()

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_format_width( int format );
```

Arguments:

format The format number (one of the SND_PCM_SFMT_* constants). For a list of the supported formats, see *snd_pcm_get_format_name()*.

Library:

`libasound.so`

Description:

The *snd_pcm_format_width()* function returns the sample width in bits.

Returns:

A positive sample width on success, or a negative error code.

Errors:

-EINVAL Invalid *format*.

Classification:

QNX Neutrino

Safety

Cancellation point No

Interrupt handler No

continued...

Safety

Signal handler	Yes
Thread	Yes

See also:

snd_pcm_build_linear_format(), *snd_pcm_format_big_endian()*,
snd_pcm_format_little_endian(), *snd_pcm_format_signed()*,
snd_pcm_format_size(), *snd_pcm_format_unsigned()*,
snd_pcm_get_format_name()

snd_pcm_get_format_name()*Convert a format value into a human-readable text string***Synopsis:**

```
#include <sys/asoundlib.h>

const char *snd_pcm_get_format_name( int format );
```

Arguments:

format The format number (one of the SND_PCM_SFMT_* constants).

Library:

`libasound.so`

Description:

The *snd_pcm_get_format_name()* function converts a format member or manifest of the form SND_PCM_SFMT_* to a text string suitable for displaying to a human user:

SND_PCM_SFMT_U8	Unsigned 8-bit
SND_PCM_SFMT_S8	Signed 8-bit
SND_PCM_SFMT_U16_LE	Unsigned 16-bit Little Endian
SND_PCM_SFMT_U16_BE	Unsigned 16-bit Big Endian
SND_PCM_SFMT_S16_LE	Signed 16-bit Little Endian
SND_PCM_SFMT_S16_BE	Signed 16-bit Big Endian

SND_PCM_SFMT_U24_LE
Unsigned 24-bit Little Endian

SND_PCM_SFMT_U24_BE
Unsigned 24-bit Big Endian

SND_PCM_SFMT_S24_LE
Signed 24-bit Little Endian

SND_PCM_SFMT_S24_BE
Signed 24-bit Big Endian

SND_PCM_SFMT_U32_LE
Unsigned 32-bit Little Endian

SND_PCM_SFMT_U32_BE
Unsigned 32-bit Big Endian

SND_PCM_SFMT_S32_LE
Signed 32-bit Little Endian

SND_PCM_SFMT_S32_BE
Signed 32-bit Big Endian

SND_PCM_SFMT_A_LAW
A-Law

SND_PCM_SFMT_MU_LAW
Mu-Law

SND_PCM_SFMT_FLOAT_LE
Float Little Endian

SND_PCM_SFMT_FLOAT_BE
Float Big Endian

SND_PCM_SFMT_FLOAT64_LE
Float64 Little Endian

SND_PCM_SFMT_FLOAT64_BE

Float64 Big Endian

SND_PCM_SFMT_IEC958_SUBFRAME_LE

IEC-958 Little Endian

SND_PCM_SFMT_IEC958_SUBFRAME_BE

IEC-958 Big Endian

SND_PCM_SFMT_IMA_ADPCM

Ima-ADPCM

SND_PCM_SFMT_GSM

GSM

SND_PCM_SFMT_MPEG

MPEG

SND_PCM_SFMT_SPECIAL

Special

Returns:

A character pointer to the text format name.



Don't modify the strings that this function returns.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_build_linear_format(), *snd_pcm_format_big_endian()*,
snd_pcm_format_little_endian(), *snd_pcm_format_signed()*,
snd_pcm_format_size(), *snd_pcm_format_unsigned()*,
snd_pcm_format_width()

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_info( snd_pcm_t *handle,
                 snd_pcm_info_t *info );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

info A pointer to a **snd_pcm_info_t** structure in which *snd_ctl_pcm_info()* stores the information.

Library:

libasound.so

Description:

The *snd_pcm_info()* function fills the *info* structure with information about the capabilities of the PCM device selected by *handle*.

Returns:

Zero on success, or a negative error code.

Errors:

-EINVAL Invalid *handle*.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

`snd_pcm_info_t`

Synopsis:

```

typedef struct snd_pcm_info
{
    uint32_t    type;
    uint32_t    flags;
    uint8_t     id[64];
    uint8_t     name[80];
    int32_t     playback;
    int32_t     capture;
    int32_t     card;
    int32_t     device;
    int32_t     shared_card;
    int32_t     shared_device;
    uint8_t     reserved[128];    /* must be filled with zeroes */
}          snd_pcm_info_t;

```

Description:

The `snd_pcm_info_t` structure describes the capabilities of a PCM device. The members include:

<i>type</i>	Sound card type. Deprecated. Do not use.
<i>flags</i>	Any combination of: <ul style="list-style-type: none"> • <code>SND_PCM_INFO_PLAYBACK</code> — the playback channel is present. • <code>SND_PCM_INFO_CAPTURE</code> — the capture channel is present. • <code>SND_PCM_INFO_DUPLEX</code> — the hardware is capable of duplex operation. • <code>SND_PCM_INFO_DUPLEX_RATE</code> — the playback and capture rates must be same for the duplex operation. • <code>SND_PCM_INFO_DUPLEX_MONO</code> — the playback and capture must be monophonic for the duplex operation.

- SND_PCM_INFO_SHARED — some or all of the hardware channels are shared using software PCM mixing.

<i>id[64]</i>	ID of this PCM device (user selectable).
<i>name[80]</i>	Name of the device.
<i>playback</i>	Number of playback subdevices - 1.
<i>capture</i>	Number of capture subdevices - 1.
<i>card</i>	Card number.
<i>device</i>	Device number.
<i>shared_card</i>	Number of shared cards for this PCM device.
<i>shared_device</i>	Number of shared devices for this PCM device.

Classification:

QNX Neutrino

See also:

snd_ctl_pcm_info(), *snd_pcm_info()*

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_nonblock_mode( snd_pcm_t *handle,
                           int nonblock );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

nonblock If this argument is nonzero, non-blocking mode is in effect for subsequent calls to *snd_pcm_read()* and *snd_pcm_write()*.

Library:

`libasound.so`

Description:

The *snd_pcm_nonblock_mode()* function sets up blocking (default) or nonblocking behavior for a *handle*.

Blocking mode suspends the execution of the client application when there's no room left in the buffer it's writing to, or nothing left to read when reading.

In nonblocking mode, programs aren't suspended, and the read and write functions return immediately with the number of bytes that were read or written by the driver. When used in this way, don't try to use the entire buffer after the call; instead, process the number of bytes returned and call the function again.

Returns:

Zero on success, or a negative error code.

Errors:

- EBADF Invalid file descriptor. Your *handle* may be corrupt.
- EINVAL Invalid *handle*.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

If possible, it is recommended that you design your application to call `select` on the PCM file descriptor, instead of using this function. Asynchronously receiving notification from the driver is much less CPU-intensive than polling it in a non-blocking loop.

See also:

snd_pcm_open(), *snd_pcm_open_preferred()*, *snd_pcm_read()*,
snd_pcm_write()

Create a handle and open a connection to a specified audio interface

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_open( snd_pcm_t **handle,
                 int card,
                 int device,
                 int mode );
```

Arguments:

- handle* A pointer to a location where *snd_pcm_open()* stores a handle for the audio interface. You'll need this handle when you call the other *snd_pcm_** functions.
- card* The card number.
- device* The audio device number.
- mode* One of:
- SND_PCM_OPEN_PLAYBACK — open the playback channel (direction).
 - SND_PCM_OPEN_CAPTURE — open the capture channel (direction).
 - SND_PCM_OPEN_DUPLEX — open both (playback and capture) channels (directions).

You can OR this flag with any of the above:

- SND_PCM_OPEN_NONBLOCK — force the mode to be nonblocking. This affects any reading from or writing to the device that you do later; you can query the device any time without blocking.
- You can change the blocking setup later by calling *snd_pcm_nonblock_mode()*

Library:

`libasound.so`

Description:

The *snd_pcm_open()* function creates a handle and opens a connection to the audio interface for sound card number *card* and audio device number *device*. It also checks if the protocol is compatible to prevent the use of programs written to an older API with newer drivers.

There are no defaults; your application must specify all the arguments to this function.

Returns:

Zero on success, or a negative error code.

Errors:

-ENOMEM Not enough memory to allocate control structures.

Examples:

See the example in “Opening your PCM device” in the Playing and Capturing Audio Data chapter.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

Successfully opening a PCM channel doesn't guarantee that there are enough audio resources free to handle your application. Audio resources (e.g. subchannels) are allocated when you configure the channel by calling *snd_pcm_channel_params()* or *snd_pcm_plugin_params()*.

See also:

snd_pcm_close(), *snd_pcm_nonblock_mode()*,
snd_pcm_open_preferred()

snd_pcm_open_preferred()

© 2005, QNX Software Systems

Create a handle and open a connection to the preferred audio interface

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_open_preferred( snd_pcm_t **handle,
                           int *rcard,
                           int *rdevice,
                           int mode );
```

Arguments:

- handle* A pointer to a location where *snd_pcm_open()* stores a handle for the audio interface. You'll need this handle when you call the other *snd_pcm_** functions.
- rcard* If non-NULL, this must be a pointer to a location where *snd_pcm_open()* can store the number of the card that it opened.
- rdevice* If non-NULL, this must be a pointer to a location where *snd_pcm_open()* can store the number of the audio device that it opened.
- mode* One of:
- SND_PCM_OPEN_PLAYBACK — open the playback channel (direction).
 - SND_PCM_OPEN_CAPTURE — open the capture channel (direction).

You can OR this flag with any of the above:

- SND_PCM_OPEN_NONBLOCK — force the mode to be nonblocking. This affects any reading from or writing to the device that you do later; you can query the device any time without blocking.
You can change the blocking setup later by calling *snd_pcm_nonblock_mode()*.

Library:

`libasound.so`

Description:

The *snd_pcm_open_preferred()* function is an extension to the *snd_pcm_open()* function that attempts to open the user-selected default (or preferred) device for the system.



If you use this function, your application will be more flexible than if you use *snd_pcm_open()*.

In a system where more than one PCM device exists, the user may set a preference for one of these devices. This function attempts to open that device and return a PCM handle to it. The function returns the card and device numbers if the *rcard* and *rdevice* arguments aren't NULL.

Here's the search order to find the preferred device:

- 1 Read `/etc/system/config/audio/preferences`.
- 2 If this file doesn't exist or has no entry, check PCM device 0 of card 0 for a software mixing overlay device. If this overlay device is found, it's opened.
- 3 Open the default device 0 of card 0.

If all of the above fail, you don't have an audio system running.

Returns:

Zero on success, or a negative value on error.

Errors:

- | | |
|---------|---|
| -EINVAL | Invalid <i>mode</i> . |
| -EACCES | Search permission is denied on a component of the path prefix, or the device exists and the permissions specified are denied. |

- EINTR The *open()* operation was interrupted by a signal.
- EMFILE Too many file descriptors are currently in use by this process.
- ENFILE Too many files are currently open in the system.
- ENOENT The named device doesn't exist.
- SND_ERROR_INCOMPATIBLE_VERSION
 The audio driver version is incompatible with the client library that the application uses.
- ENOMEM No memory available for data structures.

Examples:

See the example in “Opening your PCM device” in the Playing and Capturing Audio Data chapter.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

Successfully opening a PCM channel doesn't guarantee that there are enough audio resources free to handle your application. Audio resources (e.g. subchannels) are allocated when you configure the

channel by calling *snd_pcm_channel_params()* or *snd_pcm_plugin_params()*.

See also:

snd_pcm_close(), *snd_pcm_nonblock_mode()*, *snd_pcm_open()*

snd_pcm_playback_drain()

© 2005, QNX Software Systems

Stop the PCM playback channel and discard the contents of its queue

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_playback_drain( snd_pcm_t *handle );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

Library:

`libasound.so`

Description:

The *snd_pcm_playback_drain()* function stops the PCM playback channel associated with *handle* and causes it to discard all audio data in its buffers. This all happens immediately.

If the operation is successful (zero is returned), the channel's state is changed to `SND_PCM_STATUS_READY`.

Returns:

Zero on success, or a negative error code.

Errors:

`-EBADFD` The pcm device state isn't ready.
`-EINVAL` Invalid *handle*.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_channel_flush(), *snd_pcm_playback_flush()*

snd_pcm_playback_flush()

© 2005, QNX Software Systems

Play out all pending data in a PCM playback channel's queue and stop the channel

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_playback_flush( snd_pcm_t *handle );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

Library:

`libasound.so`

Description:

The *snd_pcm_plugin_flush()* function blocks until all unprocessed data in the driver queue has been played.

If the operation is successful (zero is returned), the channel's state is changed to `SND_PCM_STATUS_READY` and the channel is stopped.

Returns:

Zero on success, or a negative error code.

Errors:

-EBADFD The pcm device state isn't ready.

-EINTR The driver isn't processing the data (Internal Error).

-EINVAL Invalid *handle*.

-EIO An invalid channel was specified, or the data wasn't all flushed.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_capture_flush(), *snd_pcm_channel_flush()*,
snd_pcm_playback_drain(), *snd_pcm_plugin_flush()*

snd_pcm_playback_prepare()

© 2005, QNX Software Systems

Signal the driver to ready the playback channel

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_playback_prepare( snd_pcm_t *handle );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

Library:

`libasound.so`

Description:

The *snd_pcm_playback_prepare()* function prepares hardware to operate in a specified transfer direction. This call is responsible for all parts of the hardware's startup sequence that require additional initialization time, allowing the final "GO" (usually from writes into the buffers) to execute more quickly.

You can call this function in all states except `SND_PCM_STATUS_NOTREADY` (returns `-EBADFD`) and `SND_PCM_STATUS_RUNNING` (returns `-EBUSY`). If the operation is successful (zero is returned), the driver state is changed to `SND_PCM_STATUS_PREPARED`.



If your channel has underrun, you have to reprepare it before continuing. For an example, see `wave.c` in the appendix.

Returns:

Zero on success, or a negative error code.

Errors:

- EINVAL Invalid *handle*.
- EBUSY Channel is already running.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_capture_prepare(), *snd_pcm_channel_prepare()*,
snd_pcm_plugin_prepare()

snd_pcm_plugin_flush()

© 2005, QNX Software Systems

Finish processing all pending data in a PCM channel's queue and stop the channel

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_plugin_flush( snd_pcm_t *handle,
                          int channel );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

channel The channel; SND_PCM_CHANNEL_CAPTURE or SND_PCM_CHANNEL_PLAYBACK.

Library:

`libasound.so`

Description:

The *snd_pcm_plugin_flush()* function flushes all unprocessed data in the driver queue:

- If the plugin is processing playback data, the call blocks until all data in the driver queue is played out the channel.
- If the plugin is processing capture data, any unread data in the driver queue is discarded.

If the operation is successful (zero is returned), the channel's state is changed to SND_PCM_STATUS_READY.

Returns:

A positive number on success, or a negative value on error.

Errors:

-EINVAL Invalid *handle*.

Examples:

See the `wave.c` example in the appendix.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

Because the plugin interface may be subbuffering the written data until a complete driver block can be assembled, the flush call may have to inject up to $(blocksize-1)$ samples into the channel so that the last block can be sent to the driver for playing. For this reason, the flush call may return a positive value indicating that this silence had to be inserted.

This function is the plugin-aware version of `snd_pcm_channel_flush()`. It functions exactly the same way, with the above caveat. However, make sure that you don't mix and match plugin- and nonplugin-aware functions in your application, or you may get undefined behavior and misleading results.

See also:

snd_pcm_capture_flush(), *snd_pcm_channel_flush()*,
snd_pcm_playback_flush(), *snd_pcm_plugin_playback_drain()*

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_plugin_info(
    snd_pcm_t *handle,
    snd_pcm_channel_info_t *info );
```

Arguments:

- handle* The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.
- info* A pointer to a **snd_pcm_channel_info_t** structure that *snd_pcm_plugin_info()* fills in with information about the PCM channel.
- Before calling this function, set the *info* structure's *channel* member to specify the direction. This function sets all the other members.

Library:

libasound.so

Description:

The *snd_pcm_plugin_info()* function fills the *info* structure with data about the PCM channel selected by *handle*.



This function and the nonplugin version, *snd_pcm_channel_info()*, get a dynamic “snapshot” of the system’s current capabilities, which can shrink and grow as subchannels are allocated and freed. They’re similar to *snd_ctl_pcm_channel_info()*, which gets information about the *complete* capabilities of the system.

Returns:

Zero on success, or a negative error code (*errno* is set).

Errors:

-EINVAL Invalid *handle*.

Examples:

See the `wave.c` example in the appendix.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

This function is the plugin-aware version of *snd_pcm_channel_info()*. It functions exactly the same way. However, make sure that you don't mix and match plugin- and nonplugin-aware functions in your application, or you may get undefined behavior and misleading results.

See also:

snd_pcm_channel_info(), `snd_pcm_channel_info_t`

snd_pcm_plugin_params()

Set the configurable parameters for a PCM channel (plugin-aware)

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_plugin_params(
    snd_pcm_t *handle,
    snd_pcm_channel_params_t *params );
```

Arguments:

- handle* The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.
- params* A pointer to a **snd_pcm_channel_params_t** structure in which you've specified the PCM channel's configurable parameters. All members are write-only.

Library:

libasound.so

Description:

The *snd_pcm_plugin_params()* function sets up the transfer parameters according to *params*.

You can call the function in **SND_PCM_STATUS_NOTREADY** (initial) and **SND_PCM_STATUS_READY** states; otherwise, *snd_pcm_plugin_params()* returns **-EBADF**.

If the parameters are valid (i.e. *snd_pcm_plugin_params()* returns zero), the driver state is changed to **SND_PCM_STATUS_READY**.



You can confirm the channel's configuration by reading it back with *snd_pcm_plugin_setup()*.

Returns:

Zero, or a negative error code.

Errors:

-EINVAL Invalid *handle*; the data pointer is NULL, or the format is unsupported.

Examples:

See the `wave.c` example in the appendix.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

This function is the plugin-aware version of *snd_pcm_channel_params()*. It functions exactly the same way. However, make sure that you don't mix and match plugin- and nonplugin-aware functions in your application, or you may get undefined behavior and misleading results.

See also:

snd_pcm_channel_params(), `snd_pcm_channel_params_t`,
snd_pcm_channel_setup(), *snd_pcm_open()*,
snd_pcm_open_preferred(), *snd_pcm_plugin_setup()*

snd_pcm_plugin_playback_drain()

Stop the PCM playback channel and discard the contents of its queue (plugin-aware)

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_plugin_playback_drain(
    snd_pcm_t *handle );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

Library:

`libasound.so`

Description:

The *snd_pcm_plugin_playback_drain()* function stops the PCM playback channel associated with *handle* and causes it to discard all audio data in its buffers. This happens immediately.

If the operation is successful (zero is returned), the channel's state is changed to `SND_PCM_STATUS_READY`.

Returns:

Zero on success, or a negative error code (*errno* is set).

Errors:

-EBADFD The pcm device state isn't ready.
-EINVAL Invalid *handle*.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

This function is the plugin-aware version of *snd_pcm_playback_drain()*. It functions exactly the same way. However, make sure that you don't mix and match plugin- and nonplugin-aware functions in your application, or you may get undefined behavior and misleading results.

See also:

snd_pcm_playback_drain()

snd_pcm_plugin_prepare()

Signal the driver to ready the specified channel (plugin-aware)

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_plugin_prepare( snd_pcm_t *handle,
                           int channel );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

channel The channel; SND_PCM_CHANNEL_CAPTURE or SND_PCM_CHANNEL_PLAYBACK.

Library:

`libasound.so`

Description:

The *snd_pcm_plugin_prepare()* function prepares hardware to operate in a specified transfer direction. This call is responsible for all parts of the hardware's startup sequence that require additional initialization time, allowing the final "GO" (usually from writes into the buffers) to execute more quickly.

This function may be called in all states except SND_PCM_STATUS_NOTREADY (returns -EBADFD) and SND_PCM_STATUS_RUNNING (returns -EBUSY). If the operation is successful (zero is returned), the driver state is changed to SND_PCM_STATUS_PREPARED.



If your channel has underrun (during playback) or overrun (during capture), you have to reprepare it before continuing. For an example, see `wave.c` and `waverec.c` in the appendix.

Returns:

Zero, or a negative error code.

Errors:

- EBUSY The subchannel is in the running state.
- EINVAL Invalid *handle*.

Examples:

See the `wave.c` example in the appendix.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

This function is the plugin-aware version of `snd_pcm_channel_prepare()`. It functions exactly the same way. However, make sure that you don't mix and match plugin- and

nonplugin-aware functions in your application, or you may get undefined behavior and misleading results.

See also:

snd_pcm_capture_prepare(), *snd_pcm_channel_prepare()*,
snd_pcm_playback_prepare()

snd_pcm_plugin_read()

© 2005, QNX Software Systems

Transfer PCM data from the capture channel (plugin-aware)

Synopsis:

```
#include <sys/asoundlib.h>

ssize_t snd_pcm_plugin_read( snd_pcm_t *handle,
                             void *buffer,
                             size_t size );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

buffer A pointer to a buffer in which *snd_pcm_plugin_read()* can store the data that it reads.

size The size of the buffer, in bytes.

Library:

libasound.so

Description:

The *snd_pcm_plugin_read()* function reads samples from the device which must be in the proper format specified by *snd_pcm_plugin_prepare()*.

This function may suspend the client application if block behavior is active (see *snd_pcm_nonblock_mode()*) and no data is available for reading.

Returns:

A positive value that represents the number of bytes that were successfully read from the device if the capture was successful, or a negative value if an error occurred.

Errors:

-EFAULT	Failed to copy data.
-EINVAL	Invalid <i>handle</i> ; data pointer is NULL but <i>size</i> isn't zero or is negative.
-ENOMEM	Unable to allocate memory for plugin buffers.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

This function is the plugin-aware version of *snd_pcm_read()*. It functions exactly the same way, with only one caveat (see below). However, make sure that you don't mix and match plugin- and nonplugin-aware functions in your application, or you may get undefined behavior and misleading results.

The plugin-aware versions of the PCM read and write calls don't require that you work with multiples of fragment-size blocks (the nonplugin-aware versions do). This is because one of the plugins in the lib sub-buffers the data for you. You can disable this plugin by setting the `PLUGIN_DISABLE_BUFFER_PARTIAL_BLOCKS` bit with *snd_pcm_plugin_set_disable()*, in which case, the plugin-aware versions also fail on reads and writes that aren't multiples of the fragment size.

Either way, interleaved stereo data has to be aligned by the sample size times the number of channels (i.e. each write must have the same number of samples for the left and right channels).

See also:

snd_pcm_plugin_set_disable(), *snd_pcm_plugin_write()*,
snd_pcm_read()

Synopsis:

```
#include <sys/asoundlib.h>

unsigned int snd_pcm_plugin_set_disable(
    snd_pcm_t *pcm,
    unsigned int mask );
```

Arguments:

- pcm* The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.
- mask* Currently, only the following *mask* bits are supported:
- PLUGIN_DISABLE_MMAP — disable the mmap plugins.



If mmap plugins are used, some of the members of the **snd_pcm_channel_status_t** structure aren't used.

- PLUGIN_DISABLE_BUFFER_PARTIAL_BLOCKS — prevent the read and write routines from using partial blocks of data.

The plugin-aware versions of the PCM read and write calls don't require that you work with multiples of fragment-size blocks (the nonplugin-aware versions do). This is because one of the plugins in the lib sub-buffers the data for you. You can disable this plugin by setting the PLUGIN_DISABLE_BUFFER_PARTIAL_BLOCKS bit with this function, in which case the plugin-aware versions also fail on reads and writes that aren't multiples of the fragment size.

Either way, interleaved stereo data has to be aligned by the sample size times the number of channels (i.e. each write must have the same number of samples for the left and right channels).

Library:

`libasound.so`

Description:

The *snd_pcm_plugin_set_disable()* function is used to disable various plugins that would ordinarily be used in the plugin chain.

Returns:

The value of the plugin *mask* before this change was made.

Examples:

See the `wave.c` example in the appendix.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

The plugin disable mask has to be set before calling *snd_pcm_plugin_params()* for it to take effect.

See also:

snd_pcm_channel_status_t, *snd_pcm_plugin_read()*,
snd_pcm_plugin_write()

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_plugin_setup(
    snd_pcm_t *handle,
    snd_pcm_channel_setup_t *setup );
```

Arguments:

- handle* The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.
- setup* A pointer to a **snd_pcm_channel_setup_t** structure that *snd_pcm_plugin_setup()* fills with information about the current configuration of the PCM channel.
- Set the *setup* structure's *channel* member to specify the direction. All other members are read-only.

Library:

libasound.so

Description:

The *snd_pcm_plugin_setup()* function fills the *setup* structure with information about the current configuration of the PCM channel selected by *handle*.

Returns:

Zero on success, or a negative error code.

Errors:

- EINVAL Invalid *handle*; data pointer is NULL; *setup->mode* isn't SND_PCM_MODE_BLOCK.

Examples:

See the `wave.c` example in the appendix.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

This function is the plugin-aware version of *snd_pcm_channel_setup()*. It functions exactly the same way. However, make sure that you don't mix and match plugin- and nonplugin-aware functions in your application, or you may get undefined behavior and misleading results.

See also:

snd_pcm_channel_params(), *snd_pcm_channel_setup()*,
snd_pcm_channel_setup_t, *snd_mixer_gid_t*,
snd_pcm_open(), *snd_pcm_open_preferred()*

snd_pcm_plugin_status()

Get the runtime status of a PCM channel (plugin aware)

Synopsis:

```
#include <sys/asoundlib.h>

int snd_pcm_plugin_status(
    snd_pcm_t *handle,
    snd_pcm_channel_status_t *status );
```

Arguments:

- handle* The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.
- status* A pointer to a **snd_pcm_channel_status_t** structure that *snd_pcm_plugin_status()* fills with information about the PCM channel's status.
- Fill in the *status* structure's *channel* member to specify the direction. All other members are read-only.

Library:

libasound.so

Description:

The *snd_pcm_plugin_status()* function fills the *status* structure with runtime status information about the PCM channel selected by *handle*.

Returns:

Zero on success, or a negative error code.

Errors:

- EBADFD The pcm device state isn't ready.
- EFAULT Failed to copy data.
- EINVAL Invalid *handle* or the data pointer is NULL.

Examples:

See the `wave.c` example in the appendix.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

This function is the plugin-aware version of *snd_pcm_channel_status()*. It functions exactly the same way. However, make sure that you don't mix and match plugin- and nonplugin-aware functions in your application, or you may get undefined behavior and misleading results.

See also:

snd_pcm_channel_status(), `snd_pcm_channel_status_t`,
snd_pcm_open(), *snd_pcm_open_preferred()*

Synopsis:

```
#include <sys/asoundlib.h>

ssize_t snd_pcm_plugin_write( snd_pcm_t *handle,
                             const void *buffer,
                             size_t size );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

buffer A pointer to a buffer that contains the data to be written.

size The size of the data, in bytes.

Library:

`libasound.so`

Description:

The *snd_pcm_plugin_write()* function writes samples that's in the proper format specified by *snd_pcm_plugin_prepare()* to the device specified by *handle*.

Returns:

A positive value that represents the number of bytes that were successfully written to the device if the playback was successful, or a negative value if an error occurred.

Errors:

-EAGAIN Try again later. The subchannel is opened nonblock.

-EINVAL One of the following:

- The handle is invalid.

- The *buffer* argument is NULL, but the *size* is greater than zero.
- The *size* is negative.

-EIO

One of:

- The channel isn't in the prepared or running state.
- In SND_PCM_MODE_BLOCK mode, the *size* isn't an even multiple of the *frag_size* member of the `snd_pcm_channel_setup_t` structure and PCM subbuffering has been disabled with `snd_pcm_plugin_set_disable()`.

-EWOULDBLOCK

The write would have blocked (nonblocking write).

Examples:

See the `wave.c` example in the appendix.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

Caveats:

This function is the plugin-aware version of `snd_pcm_write()`. It functions exactly the same way, with one caveat (see below). However, make sure that you don't mix and match plugin- and

nonplugin-aware functions in your application, or you may get undefined behavior and misleading results.

The plugin-aware versions of the PCM read and write calls don't require that you work with multiples of fragment-size blocks (the nonplugin-aware versions do). This is because one of the plugins in the lib sub-buffers the data for you. You can disable this plugin by setting the `PLUGIN_DISABLE_BUFFER_PARTIAL_BLOCKS` bit with *snd_pcm_plugin_set_disable()*, in which case, the plugin-aware versions also fail on reads and writes that aren't multiples of the fragment size.

Either way, interleaved stereo data has to be aligned by the sample size times the number of channels (i.e. each write must have the same number of samples for the left and right channels).

See also:

snd_pcm_plugin_read(), *snd_pcm_plugin_set_disable()*,
snd_pcm_write()

snd_pcm_read()

© 2005, QNX Software Systems

Transfer PCM data from the capture channel

Synopsis:

```
#include <sys/asoundlib.h>

ssize_t snd_pcm_read( snd_pcm_t *handle,
                    void *buffer,
                    size_t size );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

buffer A pointer to a buffer in which *snd_pcm_read()* can store the data that it reads.

size The size of the buffer, in bytes.

Library:

libasound.so

Description:

The *snd_pcm_read()* function reads samples from the device, which must be in the proper format specified by *snd_pcm_channel_prepare()* or *snd_pcm_capture_prepare()*.

This function may suspend the client application if blocking mode is active (see *snd_pcm_nonblock_mode()*) and no data is available for read.

When the subdevice is in blocking mode (SND_PCM_MODE_BLOCK), then the number of read bytes must fulfill the $N \times \text{fragment-size}$ expression, where $N > 0$.

If the stream format is noninterleaved (i.e. the *interleave* member of the **snd_pcm_format_t** structure isn't set), then the driver returns data that's separated to single voice blocks encapsulated to fragments. For example, imagine you have two voices, and the fragment size is

512 bytes. The number of bytes per one voice is 256. The driver returns the first 256 bytes that contain samples for the first voice, and the second 256 bytes from the fragment size that contains samples for the second voice.

Returns:

A positive value that represents the number of bytes that were successfully read from the device if the capture was successful, or a negative value if an error occurred.

Errors:

- EAGAIN The subdevice has no data available.
- EFAULT Failed to copy data.
- EINVAL Invalid *handle*; data pointer is NULL but size isn't zero or is negative.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

snd_pcm_capture_prepare(), *snd_pcm_channel_prepare()*,
snd_pcm_format_t, *snd_pcm_plugin_read()*, *snd_pcm_write()*

snd_pcm_write()

© 2005, QNX Software Systems

Transfer PCM data to playback channel

Synopsis:

```
#include <sys/asoundlib.h>

ssize_t snd_pcm_write( snd_pcm_t *handle,
                      const void *buffer,
                      size_t size );
```

Arguments:

handle The handle for the PCM device, which you must have opened by calling *snd_pcm_open()* or *snd_pcm_open_preferred()*.

buffer A pointer to a buffer that holds the data to be written.

size The amount of data to write, in bytes.

Library:

libasound.so

Description:

The *snd_pcm_write()* function writes samples to the device, which must be in the proper format specified by *snd_pcm_channel_prepare()* or *snd_pcm_playback_prepare()*.

This function may suspend a process if blocking mode is active (see *snd_pcm_nonblock_mode()*), and no space is available in the device's buffers.

When the subdevice is in blocking mode (SND_PCM_MODE_BLOCK), then the number of written bytes must fulfill the $N \times \text{fragment-size}$ expression, where $N > 0$.

If the stream format is noninterleaved (the *interleave* member of the **snd_pcm_format_t** structure isn't set), then the driver expects that data in one fragment is separated to single voice blocks. For example, imagine that you have two voices, and the fragment size is 512 bytes. The number of bytes per one voice is 256. The driver expects that the

first 256 bytes contain samples for the first voice and the second 256 bytes from fragment contain samples for the second voice.

Returns:

A positive value that represents the number of bytes that were successfully written to the device if the playback was successful, or an error value if an error occurred.

Errors:

- EAGAIN Try again later. The subchannel is opened nonblock.
- EINVAL One of the following:
 - The handle is invalid.
 - The *buffer* argument is NULL, but the *size* is greater than zero.
 - The *size* is negative.
- EIO One of:
 - The channel isn't in the prepared or running state.
 - In SND_PCM_MODE_BLOCK mode, the *size* isn't an even multiple of the *frag_size* member of the `snd_pcm_channel_setup_t` structure.
- EWOULDBLOCK The write would have blocked (nonblocking write).

Classification:

QNX Neutrino

Safety

Cancellation point No

Interrupt handler No

continued...

Safety

Signal handler	Yes
Thread	Yes

See also:

snd_pcm_channel_prepare(), *snd_pcm_playback_prepare()*,
snd_pcm_plugin_write()

Synopsis:

```
#include <sys/asoundlib.h>

const char *snd_strerror( int errnum );
```

Arguments:

errnum An error number, which can be positive (i.e. the value of *errno*) or negative (i.e. a return code from a *snd_** function).

Library:

`libasound.so`

Description:

The *snd_strerror()* function converts an error code to a string. Its functionality is similar to that of *strerror()* (see the *QNX Library Reference*), except that it returns the correct strings for sound error codes.

Returns:

A pointer to the error message. Don't modify the string that it points to.

If *snd_strerror()* doesn't recognize the value for *errnum*, it returns a pointer to the string "Unknown error."

Examples:

See the `wave.c` example in the appendix.

Classification:

QNX Neutrino

Safety

Cancellation point	No
Interrupt handler	No
Signal handler	Yes
Thread	Yes

See also:

errno, strerror() in the *QNX Library Reference*

Synopsis:

```
typedef struct snd_switch
{
    int32_t iface;
    int32_t device;
    int32_t channel;
    uint8_t name[36];
    uint32_t type;
    uint32_t subtype;
    union
    {
        uint32_t enable:1;

        struct
        {
            uint8_t data;
            uint8_t low;
            uint8_t high;
        }
        byte;

        struct
        {
            uint16_t data;
            uint16_t low;
            uint16_t high;
        }
        word;

        struct
        {
            uint32_t data;
            uint32_t low;
            uint32_t high;
        }
        dword;

        struct
        {
            uint32_t data;
            uint32_t items[30];
            uint32_t items_cnt;
        }
    }
};
```

```
    }
    list;

    struct
    {
        uint8_t selection;
        char    strings[11][11];
        uint8_t strings_cnt;
    }
    string_11;
}
value;
}
```

Description:

The `snd_switch_t` structure describes the switches for a mixer. You can fill this structure by calling `snd_ctl_mixer_switch_read()`.

The members include:

iface The audio interface associated with the switch.

device The device number associated with the switch.

channel Currently only set to “0”.

name The text name of the switch.

type The kind of switch. The following types are supported:

SND_SW_TYPE_BOOLEAN

A simple on and off switch. See the *enable* union member.

SND_TYPE_BYTE

An 8-bit value constrained between a minimum and maximum setting. See the *byte* union member.

SND_TYPE_WORD

A 16-bit value constrained between a minimum and maximum setting. See the *word* union member.

SND_TYPE_DWORD

A 32-bit value constrained between a minimum and maximum setting. See the *dword* union member.

SND_TYPE_LIST A 32-bit value selected from a list of values. See the *list* union member. The *items_cnt* argument is the number of valid items in the array.

SND_TYPE_STRING_11

An array of string selections with a maximum length of 11 bytes. The *strings_cnt* argument is the number of valid strings in the array. The *selection* argument is the index of the selected string.

subtype The switch's subtype. The following types are supported:

SND_SW_SUBTYPE_DEC

Display the value in decimal notation.

SND_SW_SUBTYPE_HEX

Display the value in hexadecimal notation.

Classification:

QNX Neutrino

See also:

snd_ctl_mixer_switch_read(), *snd_ctl_mixer_switch_write()*



Appendix A

wave . c example



This is a sample application that plays back audio data:

```
#include <errno.h>
#include <fcntl.h>
#include <gulliver.h>
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <sys/ioctl.h>
#include <sys/select.h>
#include <sys/stat.h>
#include <sys/termio.h>
#include <sys/types.h>
#include <unistd.h>

#include <sys/asoundlib.h>

const char *kRiffId = "RIFF";
const char *kWaveId = "WAVE";

typedef struct
{
    char    tag[4];
    long    length;
}
RiffTag;

typedef struct
{
    char    Riff[4];
    long    Size;
    char    Wave[4];
}
RiffHdr;

typedef struct
{
    short    FormatTag;
    short    Channels;
    long     SamplesPerSec;
    long     AvgBytesPerSec;
    short    BlockAlign;
    short    BitsPerSample;
}
WaveHdr;

int
```

```
err (char *msg)
{
    perror (msg);
    return -1;
}

int
FindTag (FILE * fp, const char *tag)
{
    int     retVal;
    RiffTag tagBfr =
        {"", 0};

    retVal = 0;

    // Keep reading until we find the tag or hit the EOF.
    while (fread ((unsigned char *) &tagBfr, sizeof (tagBfr), 1, fp))
    {

        // If this is our tag, set the length and break.
        if (strncmp (tag, tagBfr.tag, sizeof tagBfr.tag) == 0)
        {
            retVal = ENDIAN_LE32(tagBfr.length);
            break;
        }

        // Skip ahead the specified number of bytes in the stream
        fseek (fp, tagBfr.length, SEEK_CUR);
    }

    // Return the result of our operation
    return (retVal);
}

int
CheckHdr (FILE * fp)
{
    RiffHdr riffHdr =
        {"", 0};

    // Read the header and, if successful, play the file
    // file or WAVE file.
    if (fread ((unsigned char *) &riffHdr, sizeof (RiffHdr), 1, fp) == 0)
        return 0;

    if (strncmp (riffHdr.Riff, kRiffId, strlen (kRiffId)) ||
        strncmp (riffHdr.Wave, kWaveId, strlen (kWaveId)))
        return -1;
}
```

```
        return 0;
    }

int
dev_raw (int fd)
{
    struct termios termios_p;

    if (tcgetattr (fd, &termios_p))
        return (-1);

    termios_p.c_cc[VMIN] = 1;
    termios_p.c_cc[VTIME] = 0;
    termios_p.c_lflag &= ~(ECHO | ICANON | ISIG |
        ECHOE | ECHOK | ECHONL);
    termios_p.c_oflag &= ~(OPOST);
    return (tcsetattr (fd, TCSANOW, &termios_p));
}

int
dev_unraw (int fd)
{
    struct termios termios_p;

    if (tcgetattr (fd, &termios_p))
        return (-1);

    termios_p.c_lflag |= (ECHO | ICANON | ISIG |
        ECHOE | ECHOK | ECHONL);
    termios_p.c_oflag |= (OPOST);
    return (tcsetattr (fd, TCSAFLUSH, &termios_p));
}

/*****
/* *INDENT-OFF* */
#ifdef __USAGE
%C[Options] *

Options:
    -a[card#:]<dev#>  the card & device number to play out on
#endif
/* *INDENT-ON* */
*****/

int
main (int argc, char **argv)
```

```

{
    int    card = -1;
    int    dev = 0;
    snd_pcm_t *pcm_handle;
    FILE   *file1;
    WaveHdr wavHdr1;
    int    mSamples;
    int    mSampleRate;
    int    mSampleChannels;
    int    mSampleBits;
    char   *mSampleBfr1;

    int    rtn;
    snd_pcm_channel_info_t pi;
    snd_mixer_t *mixer_handle;
    snd_mixer_group_t group;
    snd_pcm_channel_params_t pp;
    snd_pcm_channel_setup_t setup;
    int    bsize, n, N = 0, c;
    fd_set rfds, wfds;

    while ((c = getopt (argc, argv, "a:")) != EOF)
    {
        switch (c)
        {
            case 'a':
                if (strchr (optarg, ':'))
                {
                    card = atoi (optarg);
                    dev = atoi (strchr (optarg, ':') + 1);
                }
                else
                {
                    dev = atoi (optarg);
                    printf ("Using card %d device %d \n", card, dev);
                    break;
                }
            default:
                return 1;
        }
    }

    setvbuf (stdin, NULL, _IONBF, 0);
    if (card == -1)
    {
        if ((rtn = snd_pcm_open_preferred (&pcm_handle, &card, &dev, SND_PCM_OPEN_PLAYBACK)) < 0)
            return err ("device open");
    }
    else
    {
        if ((rtn = snd_pcm_open (&pcm_handle, card, dev, SND_PCM_OPEN_PLAYBACK)) < 0)

```

```
        return err ("device open");
    }

    if (argc < 2)
        return err ("no file specified");

    if ((file1 = fopen (argv[optind], "r")) == 0)
        return err ("file open #1");

    if (CheckHdr (file1) == -1)
        return err ("CheckHdr #1");

    mSamples = FindTag (file1, "fmt ");
    fread (&wavHdr1, sizeof (wavHdr1), 1, file1);
    fseek (file1, (mSamples - sizeof (WaveHdr)), SEEK_CUR);

    mSampleRate = ENDIAN_LE32(wavHdr1.SamplesPerSec);
    mSampleChannels = ENDIAN_LE16(wavHdr1.Channels);
    mSampleBits = ENDIAN_LE16(wavHdr1.BitsPerSample);

    printf ("SampleRate = %d, Channels = %d, SampleBits = %d\n", mSampleRate, mSampleChannels, mSampleBits);

    /* disabling mmap is not actually required in this example but it is included to
     * demonstrate how it is used when it is required.
     */
    if ((rtn = snd_pcm_plugin_set_disable (pcm_handle, PLUGIN_DISABLE_MMAP) < 0)
        {
        fprintf (stderr, "snd_pcm_plugin_set_disable failed: %s\n", snd_strerror (rtn));
        return -1;
        }

    memset (&pi, 0, sizeof (pi));
    pi.channel = SND_PCM_CHANNEL_PLAYBACK;
    if ((rtn = snd_pcm_plugin_info (pcm_handle, &pi)) < 0)
    {
        fprintf (stderr, "snd_pcm_plugin_info failed: %s\n", snd_strerror (rtn));
        return -1;
    }

    memset (&pp, 0, sizeof (pp));

    pp.mode = SND_PCM_MODE_BLOCK;
    pp.channel = SND_PCM_CHANNEL_PLAYBACK;
    pp.start_mode = SND_PCM_START_FULL;
    pp.stop_mode = SND_PCM_STOP_STOP;

    pp.buf.block.frag_size = pi.max_fragment_size;
    pp.buf.block.frag_max = 1;
    pp.buf.block.frag_min = 1;
```

```

pp.format.interleave = 1;
pp.format.rate = mSampleRate;
pp.format.voices = mSampleChannels;

if (mSampleBits == 8)
    pp.format.format = SND_PCM_SFMT_U8;
else
    pp.format.format = SND_PCM_SFMT_S16_LE;

if ((rtn = snd_pcm_plugin_params (pcm_handle, &pp)) < 0)
{
    fprintf (stderr, "snd_pcm_plugin_params failed: %s\n", snd_strerror (rtn));
    return -1;
}

if ((rtn = snd_pcm_plugin_prepare (pcm_handle, SND_PCM_CHANNEL_PLAYBACK)) < 0)
    fprintf (stderr, "snd_pcm_plugin_prepare failed: %s\n", snd_strerror (rtn));

memset (&setup, 0, sizeof (setup));
memset (&group, 0, sizeof (group));
setup.channel = SND_PCM_CHANNEL_PLAYBACK;
setup.mixer_gid = &group.gid;
if ((rtn = snd_pcm_plugin_setup (pcm_handle, &setup)) < 0)
{
    fprintf (stderr, "snd_pcm_plugin_setup failed: %s\n", snd_strerror (rtn));
    return -1;
}
printf ("Format %s \n", snd_pcm_get_format_name (setup.format.format));
printf ("Frag Size %d \n", setup.buf.block.frag_size);
printf ("Rate %d \n", setup.format.rate);
bsize = setup.buf.block.frag_size;

if (group.gid.name[0] == 0)
{
    printf ("Mixer Pcm Group [%s] Not Set \n", group.gid.name);
    exit (-1);
}
printf ("Mixer Pcm Group [%s]\n", group.gid.name);
if ((rtn = snd_mixer_open (&mixer_handle, card, setup.mixer_device)) < 0)
{
    fprintf (stderr, "snd_mixer_open failed: %s\n", snd_strerror (rtn));
    return -1;
}

mSamples = FindTag (file1, "data");

mSampleBfr1 = malloc (bsize);
FD_ZERO (&rfds);
FD_ZERO (&wfds);

```

```
n = 1;
while (N < mSamples && n > 0)
{
    FD_SET (STDIN_FILENO, &rfd);
    FD_SET (snd_mixer_file_descriptor (mixer_handle), &rfd);
    FD_SET (snd_pcm_file_descriptor (pcm_handle, SND_PCM_CHANNEL_PLAYBACK), &wfd);

    rtn = max (snd_mixer_file_descriptor (mixer_handle),
               snd_pcm_file_descriptor (pcm_handle, SND_PCM_CHANNEL_PLAYBACK));

    if (select (rtn + 1, &rfd, &wfd, NULL, NULL) == -1)
        return err ("select");

    if (FD_ISSET (STDIN_FILENO, &rfd))
    {
        if ((rtn = snd_mixer_group_read (mixer_handle, &group)) < 0)
            fprintf (stderr, "snd_mixer_group_read failed: %s\n", snd_strerror (rtn));

        dev_raw (fileno (stdin));
        c = getc (stdin);
        dev_unraw (fileno (stdin));
        if (c != EOF)
        {
            switch (c)
            {
                case 'q':
                    group.volume.names.front_left += 10;
                    break;
                case 'a':
                    group.volume.names.front_left -= 10;
                    break;
                case 'w':
                    group.volume.names.front_left += 10;
                    group.volume.names.front_right += 10;
                    break;
                case 's':
                    group.volume.names.front_left -= 10;
                    group.volume.names.front_right -= 10;
                    break;
                case 'e':
                    group.volume.names.front_right += 10;
                    break;
                case 'd':
                    group.volume.names.front_right -= 10;
                    break;
            }
            if (group.volume.names.front_left > group.max)
                group.volume.names.front_left = group.max;
            if (group.volume.names.front_left < group.min)
```

```

        group.volume.names.front_left = group.min;
        if (group.volume.names.front_right > group.max)
            group.volume.names.front_right = group.max;
        if (group.volume.names.front_right < group.min)
            group.volume.names.front_right = group.min;
        if ((rtn = snd_mixer_group_write (mixer_handle, &group)) < 0)
            fprintf (stderr, "snd_mixer_group_write failed: %s\n", snd_strerror (rtn));
    }
    else
        exit (0);

    printf ("Volume Now at %d:%d \n",
            100 * (group.volume.names.front_left - group.min) / (group.max - group.min),
            100 * (group.volume.names.front_right - group.min) / (group.max - group.min));
}

if (FD_ISSET (snd_mixer_file_descriptor (mixer_handle), &rfd))
{
    snd_mixer_callbacks_t callbacks =
        {0, 0, 0, 0};

    snd_mixer_read (mixer_handle, &callbacks);
}

if (FD_ISSET (snd_pcm_file_descriptor (pcm_handle, SND_PCM_CHANNEL_PLAYBACK), &wfds))
{
    snd_pcm_channel_status_t status;
    int    written = 0;

    if ((n = fread (mSampleBfr1, 1, min (mSamples - N, bsize), file1)) <= 0)
        continue;
    written = snd_pcm_plugin_write (pcm_handle, mSampleBfr1, n);
    if (written < n)
    {
        memset (&status, 0, sizeof (status));
        status.channel = SND_PCM_CHANNEL_PLAYBACK;
        if (snd_pcm_plugin_status (pcm_handle, &status) < 0)
        {
            fprintf (stderr, "underrun: playback channel status error\n");
            exit (1);
        }

        if (status.status == SND_PCM_STATUS_READY ||
            status.status == SND_PCM_STATUS_UNDERRUN)
        {
            if (snd_pcm_plugin_prepare (pcm_handle, SND_PCM_CHANNEL_PLAYBACK) < 0)
            {
                fprintf (stderr, "underrun: playback channel prepare error\n");
                exit (1);
            }
        }
    }
}

```

```
        }
    }
    if (written < 0)
        written = 0;
    written += snd_pcm_plugin_write (pcm_handle, mSampleBfr1 + written, n -
    }
    N += written;
}
}

n = snd_pcm_plugin_flush (pcm_handle, SND_PCM_CHANNEL_PLAYBACK);

rtn = snd_mixer_close (mixer_handle);
rtn = snd_pcm_close (pcm_handle);
fclose (file1);
return (0);
}
```



Appendix B

waverec.c example



This is a sample application that captures (i.e. records) audio data:

```
#include <errno.h>
#include <fcntl.h>
#include <gulliver.h>
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <sys/ioctl.h>
#include <sys/select.h>
#include <sys/stat.h>
#include <sys/termio.h>
#include <sys/types.h>
#include <unistd.h>

#include <sys/asoundlib.h>
/* *INDENT-OFF* */
struct
{
    char    riff_id[4];
    char    wave_len[4];
    struct
    {
        char    fmt_id[8];
        char    fmt_len[4];
        struct
        {
            char    format_tag[2];
            char    voices[2];
            char    rate[4];
            char    char_per_sec[4];
            char    block_align[2];
            char    bits_per_sample[2];
        }
        fmt;
        struct
        {
            char    data_id[4];
            char    data_len[4];
        }
        data;
    }
    wave;
}
riff_hdr =
{
    {'R', 'I', 'F', 'F'},
    {sizeof (riff_hdr.wave), 0, 0, 0},
    {
        {'W', 'A', 'V', 'E', 'f', 'm', 't', ' '},
    }
}
```

```

        {sizeof (riff_hdr.wave.fmt), 0, 0, 0 },
        {
            {1, 0 },
            {0, 0 },
            {0, 0, 0, 0 },
            {0, 0, 0, 0 },
            {0, 0 },
            {0, 0 }
        },
        {
            {'d', 'a', 't', 'a' },
            {0, 0, 0, 0 }
        }
    }
};
/* *INDENT-ON* */

int
err (char *msg)
{
    perror (msg);
    return -1;
}

int
dev_raw (int fd)
{
    struct termios termios_p;

    if (tcgetattr (fd, &termios_p))
        return (-1);

    termios_p.c_cc[VMIN] = 1;
    termios_p.c_cc[VTIME] = 0;
    termios_p.c_lflag &= ~(ECHO | ICANON | ISIG | ECHOE | ECHOK | ECHONL);
    termios_p.c_oflag &= ~(OPOST);
    return (tcsetattr (fd, TCSANOW, &termios_p));
}

int
dev_unraw (int fd)
{
    struct termios termios_p;

    if (tcgetattr (fd, &termios_p))
        return (-1);

    termios_p.c_lflag |= (ECHO | ICANON | ISIG | ECHOE | ECHOK | ECHONL);

```

```

        termios_p.c_oflag |= (OPOST);
        return (tcsetattr (fd, TCSAFLUSH, &termios_p));
    }

    /*******
    /* *INDENT-OFF* */
    #ifdef __USAGE
    %C[Options] *

Options:
    -8                use 8 bit mode (16 bit default)
    -a[card#:]<dev#> the card & device number to record from
    -m                record in mono (stereo default)
    -r <rate>         record at rate (44100 default | 48000 44100 22050 11025)
    -t <sec>          seconds to record (5 seconds default)
    #endif
    /* *INDENT-ON* */
    /*******

int
main (int argc, char **argv)
{
    int    card = -1;
    int    dev = 0;

    snd_pcm_t *pcm_handle;
    FILE    *file1;
    int    mSamples;
    int    mSampleRate;
    int    mSampleChannels;
    int    mSampleBits;
    int    mSampleTime;
    char    *mSampleBfr1;

    int    rtn;

    snd_pcm_channel_info_t pi;
    snd_mixer_t *mixer_handle;
    snd_mixer_group_t group;
    snd_pcm_channel_params_t pp;
    snd_pcm_channel_setup_t setup;
    int    bsize, n, N = 0, c;

    fd_set  rfd;

    mSampleRate = 44100;
    mSampleChannels = 2;
    mSampleBits = 16;

```

```
mSampleTime = 5;

while ((c = getopt (argc, argv, "8a:mr:t:")) != EOF)
{
    switch (c)
    {
        case '8':
            mSampleBits = 8;
            break;
        case 'a':
            if (strchr (optarg, ':'))
            {
                card = atoi (optarg);
                dev = atoi (strchr (optarg, ':') + 1);
            }
            else
                dev = atoi (optarg);
            printf ("Using card %d device %d \n", card, dev);
            break;
        case 'm':
            mSampleChannels = 1;
            break;
        case 'r':
            mSampleRate = atoi (optarg);
            break;
        case 't':
            mSampleTime = atoi (optarg);
            break;
        default:
            return 1;
    }
}

setvbuf (stdin, NULL, _IONBF, 0);
if (card == -1)
{
    if ((rtn = snd_pcm_open_preferred (&pcm_handle, &card, &dev, SND_PCM_OPEN_CAPTURE))
        return err ("device open");
}
else
{
    if ((rtn = snd_pcm_open (&pcm_handle, card, dev, SND_PCM_OPEN_CAPTURE)) < 0)
        return err ("device open");
}

if (argc < 2)
    return err ("no file specified");

if ((file1 = fopen (argv[optind], "w")) == 0)
    return err ("file open #1");
```

```

mSamples = mSampleRate * mSampleChannels * mSampleBits / 8 * mSampleTime;

*(short *) riff_hdr.wave.fmt.voices = ENDIAN_LE16 (mSampleChannels);
*(long *) riff_hdr.wave.fmt.rate = ENDIAN_LE32 (mSampleRate);
*(long *) riff_hdr.wave.fmt.char_per_sec =
    ENDIAN_LE32 (mSampleRate * mSampleChannels * mSampleBits / 8);
*(short *) riff_hdr.wave.fmt.block_align = ENDIAN_LE16 (mSampleChannels * mSampleBits);
*(short *) riff_hdr.wave.fmt.bits_per_sample = ENDIAN_LE16 (mSampleBits);
*(long *) riff_hdr.wave.data.data_len = ENDIAN_LE32 (mSamples);
*(long *) riff_hdr.wave_len = ENDIAN_LE32 (mSamples + sizeof (riff_hdr) - 8);
fwrite (&riff_hdr, 1, sizeof (riff_hdr), file1);

printf ("SampleRate = %d, Channels = %d, SampleBits = %d\n", mSampleRate, mSampleChannels,
        mSampleBits);

/* disabling mmap is not actually required in this example but it is included to
 * demonstrate how it is used when it is required.
 */
if ((rtn = snd_pcm_plugin_set_disable (pcm_handle, PLUGIN_DISABLE_MMAP)) < 0)
{
    fprintf (stderr, "snd_pcm_plugin_set_disable failed: %s\n", snd_strerror (rtn));
    return -1;
}

memset (&pi, 0, sizeof (pi));
pi.channel = SND_PCM_CHANNEL_CAPTURE;
if ((rtn = snd_pcm_plugin_info (pcm_handle, &pi)) < 0)
{
    fprintf (stderr, "snd_pcm_plugin_info failed: %s\n", snd_strerror (rtn));
    return -1;
}

memset (&pp, 0, sizeof (pp));

pp.mode = SND_PCM_MODE_BLOCK;
pp.channel = SND_PCM_CHANNEL_CAPTURE;
pp.start_mode = SND_PCM_START_DATA;
pp.stop_mode = SND_PCM_STOP_STOP;

pp.buf.block.frag_size = pi.max_fragment_size;
pp.buf.block.frag_max = -1;
pp.buf.block.frag_min = 1;

pp.format.interleave = 1;
pp.format.rate = mSampleRate;
pp.format.voices = mSampleChannels;

if (mSampleBits == 8)
    pp.format.format = SND_PCM_SFMT_U8;

```

```

else
    pp.format.format = SND_PCM_SFMT_S16_LE;

if ((rtn = snd_pcm_plugin_params (pcm_handle, &pp)) < 0)
{
    fprintf (stderr, "snd_pcm_plugin_params failed: %s\n", snd_strerror (rtn));
    return -1;
}

if ((rtn = snd_pcm_plugin_prepare (pcm_handle, SND_PCM_CHANNEL_CAPTURE)) < 0)
    fprintf (stderr, "snd_pcm_plugin_prepare failed: %s\n", snd_strerror (rtn));

memset (&setup, 0, sizeof (setup));
memset (&group, 0, sizeof (group));
setup.channel = SND_PCM_CHANNEL_CAPTURE;
setup.mixer_gid = &group.gid;
if ((rtn = snd_pcm_plugin_setup (pcm_handle, &setup)) < 0)
{
    fprintf (stderr, "snd_pcm_plugin_setup failed: %s\n", snd_strerror (rtn));
    return -1;
}
printf ("Format %s \n", snd_pcm_get_format_name (setup.format.format));
printf ("Frag Size %d \n", setup.buf.block.frag_size);
printf ("Rate %d \n", setup.format.rate);
bsize = setup.buf.block.frag_size;

if (group.gid.name[0] == 0)
{
    printf ("Mixer Pcm Group [%s] Not Set \n", group.gid.name);
    printf ("***>>> Input Gain Controls Disabled <<<*** \n");
}
else
    printf ("Mixer Pcm Group [%s]\n", group.gid.name);
if ((rtn = snd_mixer_open (&mixer_handle, card, setup.mixer_device)) < 0)
{
    fprintf (stderr, "snd_mixer_open failed: %s\n", snd_strerror (rtn));
    return -1;
}

mSampleBfr1 = malloc (bsize);
FD_ZERO (&rfd);
n = 1;
while (N < mSamples && n > 0)
{
    FD_SET (STDIN_FILENO, &rfd);
    FD_SET (snd_mixer_file_descriptor (mixer_handle), &rfd);
    FD_SET (snd_pcm_file_descriptor (pcm_handle, SND_PCM_CHANNEL_CAPTURE), &rfd);

    rtn = max (snd_mixer_file_descriptor (mixer_handle),

```

```
    snd_pcm_file_descriptor (pcm_handle, SND_PCM_CHANNEL_CAPTURE));

if (select (rtn + 1, &rfd, NULL, NULL, NULL) == -1)
    return err ("select");

if (FD_ISSET (STDIN_FILENO, &rfd))
{
    dev_raw (fileno (stdin));
    c = getc (stdin);
    dev_unraw (fileno (stdin));
    if (c != EOF)
    {
        if (group.gid.name[0] != 0)
        {
            if ((rtn = snd_mixer_group_read (mixer_handle, &group)) < 0)
                fprintf (stderr, "snd_mixer_group_read failed: %s\n", snd_strerror (c));
            switch (c)
            {
                case 'q':
                    group.volume.names.front_left += 1;
                    break;
                case 'a':
                    group.volume.names.front_left -= 1;
                    break;
                case 'w':
                    group.volume.names.front_left += 1;
                    group.volume.names.front_right += 1;
                    break;
                case 's':
                    group.volume.names.front_left -= 1;
                    group.volume.names.front_right -= 1;
                    break;
                case 'e':
                    group.volume.names.front_right += 1;
                    break;
                case 'd':
                    group.volume.names.front_right -= 1;
                    break;
            }
            if (group.volume.names.front_left > group.max)
                group.volume.names.front_left = group.max;
            if (group.volume.names.front_left < group.min)
                group.volume.names.front_left = group.min;
            if (group.volume.names.front_right > group.max)
                group.volume.names.front_right = group.max;
            if (group.volume.names.front_right < group.min)
                group.volume.names.front_right = group.min;
            if ((rtn = snd_mixer_group_write (mixer_handle, &group)) < 0)
                fprintf (stderr, "snd_mixer_group_write failed: %s\n", snd_strerror (c));
        }
    }
}
```

```

        printf ("Volume Now at %d:%d \n",
                100 * (group.volume.names.front_left - group.min) / (group.max - group.min),
                100 * (group.volume.names.front_right - group.min) / (group.max - group.min));
    }
}
else
    exit (0);
}

if (FD_ISSET (snd_mixer_file_descriptor (mixer_handle), &rfd))
{
    snd_mixer_callbacks_t callbacks = {
        0, 0, 0, 0
    };

    snd_mixer_read (mixer_handle, &callbacks);
}

if (FD_ISSET (snd_pcm_file_descriptor (pcm_handle, SND_PCM_CHANNEL_CAPTURE), &rfd)
{
    snd_pcm_channel_status_t status;
    int    read = 0;

    read = snd_pcm_plugin_read (pcm_handle, mSampleBfr1, bsize);
    if (read < n)
    {
        memset (&status, 0, sizeof (status));
        status.channel = SND_PCM_CHANNEL_CAPTURE;
        if (snd_pcm_plugin_status (pcm_handle, &status) < 0)
        {
            fprintf (stderr, "overrun: capture channel status error\n");
            exit (1);
        }

        if (status.status == SND_PCM_STATUS_READY ||
            status.status == SND_PCM_STATUS_OVERRUN)
        {
            if (snd_pcm_plugin_prepare (pcm_handle, SND_PCM_CHANNEL_CAPTURE) < 0)
            {
                fprintf (stderr, "overrun: capture channel prepare error\n");
                exit (1);
            }
        }
    }
    fwrite (mSampleBfr1, 1, read, file1);
    N += read;
}
}

```

```
        n = snd_pcm_plugin_flush (pcm_handle, SND_PCM_CHANNEL_CAPTURE);

        rtn = snd_mixer_close (mixer_handle);
        rtn = snd_pcm_close (pcm_handle);
        fclose (file1);
        return (0);
    }
```



Appendix C

mixer_ctl.c example



This is a sample application that captures the groups and switches in the mixer:

```

#include <errno.h>
#include <fcntl.h>
#include <fnmatch.h>
#include <gulliver.h>
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <sys/ioctl.h>
#include <sys/select.h>
#include <sys/stat.h>
#include <sys/termio.h>
#include <sys/types.h>
#include <unistd.h>

#include <sys/asoundlib.h>

/*****
/* *INDENT-OFF* */
#ifdef __USAGE
%C [Options] Cmds

Options:
    -a[card#:]<dev#>  the card & mixer device number to access

Cmds:

    groups [-details] [pattern]
        - details will print the group details

    group name [mute[Y]=off|on] [capture[Y]=off|on] [volume[Y]=x|x%] ...
        - name is the group name quoted if it contains white space
        - the Y is an option that restricts the change to only one voice (if po

    switches [pattern]

    switch name [value]
        - name is the switch name quoted if it contains white space

#endif
/* *INDENT-ON* */
/*****

void
display_group (snd_mixer_t * mixer_handle, snd_mixer_gid_t * gid, snd_mixer_group_t * g
{
    int    j;

```

```

printf ("\t%s", %d - %s \n", gid->name, gid->index,
        group->caps & SND_MIXER_GRPCAP_PLAY_GRP ? "Playback Group" : "Capture Group");

printf ("\tCapabilities - ");
if (group->caps & SND_MIXER_GRPCAP_VOLUME)
    printf (" Volume");
if (group->caps & SND_MIXER_GRPCAP_JOINTLY_MUTE)
    printf (" Jointly-Mute");
else if (group->caps & SND_MIXER_GRPCAP_MUTE)
    printf (" Mute");
if (group->caps & SND_MIXER_GRPCAP_JOINTLY_CAPTURE)
    printf (" Jointly-Capture");
if (group->caps & SND_MIXER_GRPCAP_EXCL_CAPTURE)
    printf (" Exclusive-Capture");
else if (group->caps & SND_MIXER_GRPCAP_CAPTURE)
    printf (" Capture");
printf ("\n");

printf ("\tChannels - ");
for (j = 0; j <= SND_MIXER_CHN_LAST; j++)
{
    if (!(group->channels & (1 << j)))
        continue;
    printf ("%s ", snd_mixer_channel_name (j));
}
printf ("\n");
printf ("\tChannels - ");
for (j = 0; j <= SND_MIXER_CHN_LAST; j++)
{
    if (!(group->channels & (1 << j)))
        continue;
    printf ("%s ", snd_mixer_channel_name (j));
}
printf ("\n");

printf ("\tVolume Range - minimum=%i, maximum=%i\n", group->min, group->max);

for (j = 0; j <= SND_MIXER_CHN_LAST; j++)
{
    if (!(group->channels & (1 << j)))
        continue;
    printf ("\tChannel %d %-12.12s - %3d (%3d%%) %s %s\n", j,
            snd_mixer_channel_name (j), group->volume.values[j],
            (group->max - group->min) <= 0 ? 0 : 100 * (group->volume.values[j]
            / (group->max - group->min)),
            group->mute & (1 << j) ? "Muted" : "", group->capture & (1 << j) ?
}
}
void

```

```

display_groups (snd_mixer_t * mixer_handle, int argc, char *argv[])
{
    char    details = 0;
    char    *pattern;
    snd_mixer_groups_t groups;
    int     i;
    int     rtn;
    snd_mixer_group_t group;

    optind = 1;
    while ((i = getopt (argc, argv, "d")) != EOF)
    {
        switch (i)
        {
            case 'd':
                details = 1;
                break;
        }
    }
    pattern = (optind >= argc) ? "" : argv[optind];

    while (1)
    {
        memset (&groups, 0, sizeof (groups));
        if (snd_mixer_groups (mixer_handle, &groups) < 0)
        {
            fprintf (stderr, "snd_mixer_groups API call - %s", strerror (errno));
        }
        if (groups.groups_over > 0)
        {
            groups.groups_size = groups.groups_over;
            groups.pgroups =
                (snd_mixer_gid_t *) malloc (sizeof (snd_mixer_gid_t) *
                groups.groups_size);
            if (groups.pgroups == NULL)
                fprintf (stderr, "Unable to malloc group array - %s", strerror (errno));
            groups.groups_over = 0;
            groups.groups = 0;
            if (snd_mixer_groups (mixer_handle, &groups) < 0)
                fprintf (stderr, "No Mixer Groups ");
            if (groups.groups_over > 0)
            {
                free (groups.pgroups);
                continue;
            }
            else
            {
                snd_mixer_sort_gid_table (groups.pgroups, groups.groups_size,
                snd_mixer_default_weights);
                break;
            }
        }
    }
}

```

```

    }
}

for (i = 0; i < groups.groups; i++)
{
    if (fnmatch (pattern, groups.pgroups[i].name, 0) == 0)
    {
        memset (&group, 0, sizeof (group));
        memcpy (&group.gid, &groups.pgroups[i], sizeof (snd_mixer_gid_t));
        if ((rtn = snd_mixer_group_read (mixer_handle, &group)) < 0)
            fprintf (stderr, "snd_mixer_group_read failed: %s\n", snd_...

        if (details)
            display_group (mixer_handle, &groups.pgroups[i], &group);
        else
        {
            printf ("\n%s\n", %d*c - %s \n",
                groups.pgroups[i].name, groups.pgroups[i].index,
                2 + sizeof (groups.pgroups[i].name) - strlen (group...
                group.caps & SND_MIXER_GRP_CAP_PLAY_GRP ? "Playback
        }
    }
}

int
find_group_best_match (snd_mixer_t * mixer_handle, snd_mixer_gid_t * gid, snd_mixer_group_t * group)
{
    snd_mixer_groups_t groups;
    int i;

    while (1)
    {
        memset (&groups, 0, sizeof (groups));
        if (snd_mixer_groups (mixer_handle, &groups) < 0)
        {
            fprintf (stderr, "snd_mixer_groups API call - %s", strerror (errno));
        }
        if (groups.groups_over > 0)
        {
            groups.groups_size = groups.groups_over;
            groups.pgroups =
                (snd_mixer_gid_t *) malloc (sizeof (snd_mixer_gid_t) * groups.groups_size);
            if (groups.pgroups == NULL)
                fprintf (stderr, "Unable to malloc group array - %s", strerror (errno));
            groups.groups_over = 0;
            groups.groups = 0;
            if (snd_mixer_groups (mixer_handle, &groups) < 0)

```

```

        fprintf (stderr, "No Mixer Groups ");
        if (groups.groups_over > 0)
        {
            free (groups.pgroups);
            continue;
        }
        else
            break;
    }
}

for (i = 0; i < groups.groups; i++)
{
    if (stricmp (gid->name, groups.pgroups[i].name) == 0 &&
        gid->index == groups.pgroups[i].index)
    {
        memset (group, 0, sizeof (group));
        memcpy (gid, &groups.pgroups[i], sizeof (snd_mixer_gid_t));
        memcpy (&group->gid, &groups.pgroups[i], sizeof (snd_mixer_gid_t));
        if ((snd_mixer_group_read (mixer_handle, group)) < 0)
            return ENOENT;
        else
            return EOK;
    }
}

return ENOENT;
}

int
group_option_value (char *option)
{
    char    *ptr;
    int     value = -1;

    if ((ptr = strrchr (option, '=')) != NULL)
    {
        if (stricmp (ptr + 1, "off") == 0)
            value = 0;
        else if (stricmp (ptr + 1, "on") == 0)
            value = 1;
        else
            value = atoi (ptr + 1);
    }
    return (value);
}

void
modify_group (snd_mixer_t * mixer_handle, int argc, char *argv[])

```

```

{
    int    optind = 1;
    snd_mixer_gid_t gid;
    char  *ptr;
    int    rtn;
    snd_mixer_group_t group;
    uint32_t channel = 0, j;
    int32_t value;

    if (optind >= argc)
    {
        fprintf (stderr, "No Group specified \n");
        return;
    }

    memset (&gid, 0, sizeof (gid));
    ptr = strtok (argv[optind++], ",");
    strncpy (gid.name, ptr, sizeof (gid.name));
    ptr = strtok (NULL, " ");
    if (ptr != NULL)
        gid.index = atoi (ptr);

    memset (&group, 0, sizeof (group));
    memcpy (&group.gid, &gid, sizeof (snd_mixer_gid_t));
    if ((rtn = snd_mixer_group_read (mixer_handle, &group)) < 0)
    {
        if (rtn == -ENXIO)
            rtn = find_group_best_match (mixer_handle, &gid, &group);

        if (rtn != EOK)
        {
            fprintf (stderr, "snd_mixer_group_read failed: %s\n", snd_strerror (rtn));
            return;
        }
    }

    /* if we have a value option set the group, write and reread it (to get true driver)
    /* some things like capture (MUX) can't be turned off but can only be set on another
    while (optind < argc)
    {

        if (strnicmp (argv[optind], "mute", 4) == 0)
        {
            if (argv[optind][4] == '=')
                channel = LONG_MAX;
            else
                channel = atoi (&argv[optind][4]);
            value = group_option_value (argv[optind]);
            if (channel == LONG_MAX)
                group.mute = value ? LONG_MAX : 0;
        }
    }

```

```

        else
            group.mute = value ? group.mute | (1 << channel) : group.mute;
    }
    else if (strnicmp (argv[optind], "capture", 7) == 0)
    {
        if (argv[optind][7] == '=')
            channel = LONG_MAX;
        else
            channel = atoi (&argv[optind][7]);
        value = group_option_value (argv[optind]);
        if (channel == LONG_MAX)
            group.capture = value ? LONG_MAX : 0;
        else
            group.capture =
                value ? group.capture | (1 << channel) : group.capture;
    }
    else if (strnicmp (argv[optind], "volume", 6) == 0)
    {
        if (argv[optind][6] == '=')
            channel = LONG_MAX;
        else
            channel = atoi (&argv[optind][6]);
        value = group_option_value (argv[optind]);
        if (argv[optind][strlen (argv[optind]) - 1] == '%' && (group.max < value))
            value = (value * (group.max - group.min)) / 100 + group.min;
        if (value > group.max)
            value = group.max;
        if (value < group.min)
            value = group.min;
        for (j = 0; j <= SND_MIXER_CHN_LAST; j++)
        {
            if (!(group.channels & (1 << j)))
                continue;
            if (channel == LONG_MAX || channel == j)
                group.volume.values[j] = value;
        }
    }
    else
        printf ("\n\t>>> Unrecognized option [%s] <<<<\n\n", argv[optind]);
    if (channel != LONG_MAX && !(group.channels & (1 << channel)))
        printf ("\n\t>>> Channel specified [%d] Not in group <<<<\n\n",
            optind++);

    if ((rtn = snd_mixer_group_write (mixer_handle, &group)) < 0)
        fprintf (stderr, "snd_mixer_group_write failed: %s\n", snd_strerror (rtn));
    if ((rtn = snd_mixer_group_read (mixer_handle, &group)) < 0)
        fprintf (stderr, "snd_mixer_group_read failed: %s\n", snd_strerror (rtn));
}

/* display the current group state */

```

```

        display_group (mixer_handle, &gid, &group);
    }

void
display_switch (snd_switch_t * sw, char table_formatted)
{
    printf ("\s\%*c ", sw->name,
            table_formatted ? sizeof (sw->name) - strlen (sw->name) : 1, ' ');
    switch (sw->type)
    {
    case SND_SW_TYPE_BOOLEAN:
        printf ("%s %s \n", "BOOLEAN", sw->value.enable ? "on" : "off");
        break;
    case SND_SW_TYPE_BYTE:
        printf ("%s %d \n", "BYTE ", sw->value.byte.data);
        break;
    case SND_SW_TYPE_WORD:
        printf ("%s %d \n", "WORD ", sw->value.word.data);
        break;
    case SND_SW_TYPE_DWORD:
        printf ("%s %d \n", "DWORD ", sw->value.dword.data);
        break;
    case SND_SW_TYPE_LIST:
        if (sw->subtype == SND_SW_SUBTYPE_HEXA)
            printf ("%s 0x%x \n", "LIST ", sw->value.list.data);
        else
            printf ("%s %d \n", "LIST ", sw->value.list.data);
        break;
    case SND_SW_TYPE_STRING_l1:
        printf ("%s \s\ " \n", "STRING ",
                sw->value.string_l1.strings[sw->value.string_l1.selection]);
        break;
    default:
        printf ("%s %d \n", "? ", 0);
    }
}

void
display_switches (snd_ctl_t * ctl_handle, int mixer_dev, int argc, char *argv[])
{
    int i;
    char *pattern;
    snd_switch_list_t list;
    snd_switch_t sw;
    int rtn;

    optind = 1;
    while ((i = getopt (argc, argv, "d")) != EOF)

```

```

    {
        switch (i)
        {
        }
    }
    pattern = (optind >= argc) ? "*" : argv[optind];
    while (1)
    {
        memset (&list, 0, sizeof (list));
        if (snd_ctl_mixer_switch_list (ctl_handle, mixer_dev, &list) < 0)
        {
            fprintf (stderr, "snd_ctl_mixer_switch_list API call - %s", str);
        }
        if (list.switches_over > 0)
        {
            list.switches_size = list.switches_over;
            list.pswitches = malloc (sizeof (snd_switch_list_item_t) * list.switches_size);
            if (list.pswitches == NULL)
                fprintf (stderr, "Unable to malloc switch array - %s", str);
            list.switches_over = 0;
            list.switches = 0;
            if (snd_ctl_mixer_switch_list (ctl_handle, mixer_dev, &list) < 0)
                fprintf (stderr, "No Switches ");
            if (list.switches_over > 0)
            {
                free (list.pswitches);
                continue;
            }
            else
                break;
        }
    }

    for (i = 0; i < list.switches_size; i++)
    {
        memset (&sw, 0, sizeof (sw));
        strncpy (sw.name, (&list.pswitches[i])->name, sizeof (sw.name));
        if ((rtn = snd_ctl_mixer_switch_read (ctl_handle, mixer_dev, &sw)) < 0)
            fprintf (stderr, "snd_ctl_mixer_switch_read failed: %s\n", str);
        display_switch (&sw, 1);
    }
}
void
modify_switch (snd_ctl_t * ctl_handle, int mixer_dev, int argc, char *argv[])
{
    int    optind = 1;
    snd_switch_t sw;
    int    rtn;
    int    value = 0;
    char   *string = NULL;

```

```

if (optind >= argc)
{
    fprintf (stderr, "No Switch specified \n");
    return;
}

memset (&sw, 0, sizeof (sw));
strncpy (sw.name, argv[optind++], sizeof (sw.name));
if ((rtn = snd_ctl_mixer_switch_read (ctl_handle, mixer_dev, &sw)) < 0)
{
    fprintf (stderr, "snd_ctl_mixer_switch_read failed: %s\n", snd_strerror (rtn));
    return;
}

/* if we have a value option set the sw, write and reread it (to get true driver state)
if (optind < argc)
{
    if (stricmp (argv[optind], "off") == 0)
        value = 0;
    else if (stricmp (argv[optind], "on") == 0)
        value = 0;
    else if (stricmp (argv[optind], "on") == 0)
        value = 1;
    else if (strnicmp (argv[optind], "0x", 2) == 0)
        value = strtol (argv[optind], NULL, 16);
    else
    {
        value = atoi (argv[optind]);
        string = argv[optind];
    }
    optind++;
    if (sw.type == SND_SW_TYPE_BOOLEAN)
        sw.value.enable = value;
    else if (sw.type == SND_SW_TYPE_BYTE)
        sw.value.byte.data = value;
    else if (sw.type == SND_SW_TYPE_WORD)
        sw.value.word.data = value;
    else if (sw.type == SND_SW_TYPE_DWORD)
        sw.value.dword.data = value;
    else if (sw.type == SND_SW_TYPE_LIST)
        sw.value.list.data = value;
    else if (sw.type == SND_SW_TYPE_STRING_11)
    {
        for (rtn = 0; rtn < sw.value.string_11.strings_cnt; rtn++)
        {
            if (stricmp (string, sw.value.string_11.strings[rtn]) == 0)
            {
                sw.value.string_11.selection = rtn;
                break;
            }
        }
    }
}

```

```

    }
    if (rtn == sw.value.string_ll.strings_cnt)
    {
        fprintf (stderr, "ERROR string \"%s\" NOT IN LIST \n",
                snd_ctl_mixer_switch_read (ctl_handle, mixer_dev, &sw));
    }
    if ((rtn = snd_ctl_mixer_switch_write (ctl_handle, mixer_dev, &sw)) < 0)
        fprintf (stderr, "snd_ctl_mixer_switch_write failed: %s\n", snd);
    if ((rtn = snd_ctl_mixer_switch_read (ctl_handle, mixer_dev, &sw)) < 0)
        fprintf (stderr, "snd_ctl_mixer_switch_read failed: %s\n", snd);
}

/* display the current switch state */
display_switch (&sw, 0);
}

int
main (int argc, char *argv[])
{
    int    c;
    int    card = 0;
    int    dev = 0;
    int    rtn;
    snd_ctl_t *ctl_handle;
    snd_mixer_t *mixer_handle;

    optind = 1;
    while ((c = getopt (argc, argv, "a:")) != EOF)
    {
        switch (c)
        {
            case 'a':
                if (strchr (optarg, ':'))
                {
                    card = atoi (optarg);
                    dev = atoi (strchr (optarg, ':') + 1);
                }
                else
                    dev = atoi (optarg);
                printf ("Using card %d device %d \n", card, dev);
                break;
            default:
                return 1;
        }
    }
}

```

```
if ((rtn = snd_ctl_open (&ctl_handle, card)) < 0)
{
    fprintf (stderr, "snd_ctlr_open failed: %s\n", snd_strerror (rtn));
    return -1;
}

if ((rtn = snd_mixer_open (&mixer_handle, card, dev)) < 0)
{
    fprintf (stderr, "snd_mixer_open failed: %s\n", snd_strerror (rtn));
    return -1;
}

if (optind >= argc)
    display_groups (mixer_handle, argc - optind, argv + optind);
else if (strcmp (argv[optind], "groups") == 0)
    display_groups (mixer_handle, argc - optind, argv + optind);
else if (strcmp (argv[optind], "group") == 0)
    modify_group (mixer_handle, argc - optind, argv + optind);
else if (strcmp (argv[optind], "switches") == 0)
    display_switches (ctl_handle, dev, argc - optind, argv + optind);
else if (strcmp (argv[optind], "switch") == 0)
    modify_switch (ctl_handle, dev, argc - optind, argv + optind);
else
    fprintf (stderr, "Unknown command specified \n");
snd_mixer_close (mixer_handle);
snd_ctl_close (ctl_handle);
return (0);
}
```

Appendix D

LGPL License Agreement



LGPL License Agreement

The only supported interface to the ALSA 5 drivers is through **libasound.so**. Direct use of *ioctl()*'s aren't supported because of the requirements of the ALSA API. It uses *ioctl()*'s in ways that are illegal in the QNX OS (e.g. passing a structure that contains a pointer through an *ioctl()*).

The **asound** library is licensed under the **Library** GNU Public License (LGPL). This means that any changes to the library must be open-sourced, but proprietary code can link to the library *without* becoming open-source.

The **asound** library is released with QNX only as a shared library (**libasound.so**). QNX Software Systems won't be offering a static library. The intention is to gradually improve the quality and number of services that this library provides; by linking against shared libraries, you'll receive the benefits of improvements without recompiling.



Glossary



ADC

Analog Digital Converter. This converts an analog audio signal into a digital stream of samples.

ALSA

Advanced Linux Sound Architecture.

capture group

A mixer group that contains up to one volume, one mute, and one input selection element.

CD

Compact disk.

codec

Compression-Decompression module or Coder-Decoder.

DAC

Digital Analog Converter. This converts a digital stream of samples into an analog signal.

element

See **mixer element**.

group

See **mixer group**.

MIC

Microphone.

mixer element

A component of an audio mixer, with a single, discrete function.

mixer group

A collection or group of elements and associated control capabilities.

PCI

Peripheral Component Interconnect (personal computer bus).

PCM

Pulse Code Modulation. A technique for converting analog signals to a digital representation.

playback group

A mixer group that contains up to one volume element and one mute element.

QSA

QNX Sound Architecture.

SRC

Sample Rate Conversion.

subchannel

The collection of resources that a single connection to a client uses within a PCM device (playback or capture).

Index

!

`/dev/snd` 4
`/etc/system/config/audio/preferences` 203
`<asound.h>` xvi, 6
`<asoundlib.h>` xvi

A

Advanced Linux Sound Architecture
(ALSA) 3, 39
 LGPL license agreement 287
Analog Digital Converter (ADC) 7, 22
 mixer element 29
`asound` library xvi, 287
audio chips *See* cards
audio device
 closing 166
 opening 13, 200
 opening preferred 13, 203

B

blocking mode 19, 24, 197, 199, 202
boolean value
 getting 96
 setting 125

C

capture
 about 5, 22
 capabilities
 getting 15, 142, 215
 structure 15, 144
 channel direction 13
 data, selecting 22
 device
 configuring 14
 duplex mode 195, 199
 opening 13
 example 261
 flushing 25, 136, 140, 212
 information 68

- mixer groups 30
- opening channel for 199, 202
- overrun 7, 16, 23, 25, 163
 - rollover 151
- parameters
 - setting 14, 148, 217
 - structure 14, 150
- preparing 16, 138, 153, 221
- reading data 24, 224, 236
- setup
 - getting 16, 155, 229
 - structure 16, 157
- states 22
- status
 - getting 26, 160, 231
 - structure 26, 162
- stopping 25
- subchannel
 - closing 17
- synchronizing 25, 26

cards

- about 3
- counting 46
- hardware information
 - getting 56
 - structure 58
- listing 48
- name, getting
 - common 42
 - long 40
- number, getting from name 44

control device

- about 4
- callbacks 50
- closing 52
- connection handle 66
- file descriptor, getting 54

- opening 66
- reading from 72

conventions

- typographical xiii

D

data formats *See* formats

devices

- control 4
- listing 4
- mixers 5
- PCM 5

Digital Analog Converter (DAC) 7

- mixer element 29

duplex mode 195, 199

E

error codes, converting to

- strings 34, 241

F

file descriptors, getting

- control 54
- mixer 35, 92
- PCM 19, 24, 168

formats 6

- checking for
 - big endian 6, 173
 - linear 6, 175

- little endian 6, 177
- signed 6, 179
- unsigned 7, 185
- linear, building 6, 134
- name, getting 6, 189
- size, converting to bytes 181
- width, calculating 187

H

handles

- control device 66
- mixer 31
- PCM 13

I

io-audio xv
ioctl() 287

L

LGPL license agreement 287
libasound.so xvi, 287

M

mixers

- about 5
- callbacks 74
- capture groups 30

- closing 36, 78
- connection handle 31
- elements
 - capabilities 81, 83, 85
 - getting all 87
 - ID 80
 - information about all 90
 - sorting by ID 129
 - weights 133
- events
 - handlers 74
 - mask 35, 94, 98, 127
 - reading 35, 119
- file descriptor, getting 35, 92
- groups
 - capture 30
 - control structure 34, 103
 - ID structure 32, 34, 100
 - IDs, getting 34, 109
 - information about all 111
 - number of, getting 34, 109
 - playback 30
 - reading 32, 60, 101
 - sorting by ID 131
 - weights 133
 - writing 22, 32, 107
- information about
 - getting 113
 - structure 115
- opening 31, 117
- playback groups 30
- routes
 - IDs, getting 121
 - information about all 123
 - number of, getting 121
- switches
 - mask 244

N

nonblocking mode 19, 24, 197,
199, 202
Not Ready state 7, 15, 18, 23, 138,
148, 153, 162, 210, 217,
221

O

Overrun state 7, 16, 23, 25, 163
rollover 151

P

pathname delimiter in QNX
Momentics documentation
xiv

Paused state 7, 163

PCM

about 5
capture
about 5, 22
capabilities 15, 142, 144,
215
channel direction 13
data, selecting 22
device, configuring 14
device, opening 13
duplex mode 195, 199
example 261
flushing 25, 136, 140, 212
information 68
overrun 7, 16, 23, 25, 163

parameters 14, 148, 150,
217
preparing 16, 138, 153, 221
reading data 24, 224, 236
rollover 151
setup 16, 155, 157, 229
states 22
status 26, 160, 162, 231
stopping 25
subchannel, closing 17
synchronizing 25, 26
closing 166
connection handle 13
data format 183
devices 13
capabilities 70, 195
finding 171
information about,
getting 193
file descriptor, getting 19, 24,
168
mixer
example 273
opening 13, 200
opening preferred 13, 203
playback
about 5, 17
capabilities 15, 142, 144,
215
channel direction 13
device, configuring 14
device, opening 13
duplex mode 195, 199
example 249
flushing 21, 140, 208, 212
information 68

- parameters 14, 148, 150, 217
- preparing 16, 153, 221
- preparing for 210
- rollover 151
- setup 16, 33, 155, 157, 229
- software mixing 8
- states 17
- status 21, 160, 162, 231
- stopping 20, 206, 219
- subchannel, closing 17
- synchronizing 20, 21
- underrun 7, 16, 18, 20, 163
- writing data 19, 233, 238
- states 7
- subchannels 5
- playback
 - about 5, 17
 - capabilities
 - getting 15, 142, 215
 - structure 15, 144
 - channel direction 13
 - device
 - configuring 14
 - duplex mode 195, 199
 - opening 13
 - example 249, 273
 - flushing 21, 140, 208, 212
 - information 68
 - mixer groups 30
 - opening channel for 199, 202
 - parameters
 - setting 14, 148, 217
 - structure 14, 150
 - preparing 16, 153, 221
 - preparing for 210
 - setup
 - getting 16, 33, 155, 229
 - structure 16, 157
 - software PCM mixing 8
 - states 17
 - status
 - getting 21, 160, 231
 - structure 21, 162
 - stopping 20, 206, 219
 - subchannel
 - closing 17
 - synchronizing 20, 21
 - underrun 7, 16, 18, 20, 163
 - rollover 151
 - writing data 19, 233, 238
- plugin functions
 - about 9
 - disabling 228
 - PCM channels
 - capabilities 15, 215
 - capture data, reading 24, 224
 - data, writing 19, 233
 - flushing 21, 25, 212
 - parameters, setting 14, 217
 - playback, stopping 21, 219
 - preparing 16, 221
 - setup 16, 33, 229
 - status 21, 26, 231
 - PLUGIN_DISABLE_BUFFER_PARTIAL_BLOCKS 225, 235
 - Prepared state 7, 16, 18, 23, 138, 153, 163, 210, 221

Q

QNX Sound Architecture (QSA) 3,
39

R

Ready state 7, 15, 18, 23, 136, 148,
163, 206, 208, 212, 217,
219
recording *See* capture
rollover 151
Running state 7, 18, 23, 138, 153,
163, 210, 221

S

select() 19, 24, 35
snd_ctl_callbacks_t 50
snd_ctl_hw_info_t 58
snd_ctl_t 66
snd_mixer_callbacks_t 74
snd_mixer_eid_t 80, 87, 90,
123
snd_mixer_element_t 83
snd_mixer_elements_t 90
snd_mixer_filter_t 94
snd_mixer_gid_t 32, 34, 100,
101, 104, 109, 111, 131,
147
snd_mixer_group_t 32, 34,
101, 103, 107
snd_mixer_groups_t 109, 111
snd_mixer_info_t 115

snd_mixer_routes_t 123
snd_mixer_t 31, 117
snd_mixer_weight_entry_t
133
snd_pcm_channel_info_t 15,
144
snd_pcm_channel_params_t
14, 150
snd_pcm_channel_setup_t 16,
157
snd_pcm_channel_status_t
21, 26, 162
snd_pcm_format_t 183
snd_pcm_info_t 195
snd_pcm_t 13, 199, 202
snd_switch_list_item_t 51
snd_switch_mixer_list_t 60
snd_switch_t 244
snd_card_get_longname() 40
snd_card_get_name() 42
snd_card_name() 44
snd_cards() 46
snd_cards_list() 48
snd_ctl_close() 52
snd_ctl_file_descriptor() 54
snd_ctl_hw_info() 56
SND_CTL_IFACE_* 51
snd_ctl_mixer_switch_list() 61
snd_ctl_mixer_switch_read() 62
snd_ctl_mixer_switch_write() 64
snd_ctl_open() 60, 66
snd_ctl_pcm_channel_info() 68
snd_ctl_pcm_info() 70
snd_ctl_read() 72
SND_CTL_READ_SWITCH_* 51
snd_mixer_close() 36, 78

- snd_mixer_default_weights* 129, 131
- snd_mixer_element_read()* 30, 81
- snd_mixer_elements()* 87
- snd_mixer_element_write()* 30, 85
- snd_mixer_file_descriptor()* 35, 92
- snd_mixer_get_bit()* 96
- snd_mixer_get_filter()* 98
- snd_mixer_group_read()* 32, 101
- snd_mixer_groups()* 34, 109
- snd_mixer_group_write()* 22, 32, 107
- SND_MIXER_GRP_CAP_CAP_GRP 104
- SND_MIXER_GRP_CAP_CAPTURE 104
- SND_MIXER_GRP_CAP_EXCL_CAPTURE 104
- SND_MIXER_GRP_CAP_JOINTLY_CAPTURE 104
- SND_MIXER_GRP_CAP_JOINTLY_MUTE 104
- SND_MIXER_GRP_CAP_JOINTLY_VOLUME 104
- SND_MIXER_GRP_CAP_MUTE 104
- SND_MIXER_GRP_CAP_PLAY_GRP 104
- SND_MIXER_GRP_CAP_SUBCHANNEL 104
- SND_MIXER_GRP_CAP_VOLUME 104
- snd_mixer_info()* 113
- snd_mixer_open()* 31, 117
- snd_mixer_read()* 35, 119
- SND_MIXER_READ_* 94
- SND_MIXER_READ_ELEMENT_* 75
- SND_MIXER_READ_GROUP_* 75
- snd_mixer_routes()* 121
- snd_mixer_set_bit()* 125
- snd_mixer_set_filter()* 35, 127
- snd_mixer_sort_eid_table()* 129
- snd_mixer_sort_gid_table()* 131
- SND_PCM_BOUNDARY 164
- snd_pcm_build_linear_format()* 6, 134
- snd_pcm_capture_flush()* 26, 136
- snd_pcm_capture_prepare()* 16, 23, 138
- SND_PCM_CHANNEL_CAPTURE 68, 140, 145, 151, 153, 157, 162, 168, 212, 221
- snd_pcm_channel_flush()* 21, 26, 140
- snd_pcm_channel_info()* 15, 142
- snd_pcm_channel_params()* 14, 18, 23, 148
- SND_PCM_CHANNEL_PLAYBACK 68, 140, 145, 151, 153, 157, 162, 168, 212, 221
- snd_pcm_channel_prepare()* 16, 18, 23, 153
- snd_pcm_channel_setup()* 16, 33, 155
- snd_pcm_channel_status()* 21, 26, 160
- SND_PCM_CHNINFO_BLOCK 145
- SND_PCM_CHNINFO_BLOCK_TRANSFER 145
- SND_PCM_CHNINFO_INTERLEAVE 145
- SND_PCM_CHNINFO_MMAP 145
- SND_PCM_CHNINFO_MMAP_VALID 145
- SND_PCM_CHNINFO_NONINTERLEAVE 145
- SND_PCM_CHNINFO_OVERRANGE 145
- SND_PCM_CHNINFO_PAUSE 145
- snd_pcm_close()* 17, 166
- snd_pcm_file_descriptor()* 19, 24, 168
- SND_PCM_FILL_* 152

- snd_pcm_find()* 171
- SND_PCM_FMT_* 6, 170
- snd_pcm_format_big_endian()* 6, 173
- snd_pcm_format_linear()* 6, 175
- snd_pcm_format_little_endian()* 6, 177
- snd_pcm_format_signed()* 6, 179
- snd_pcm_format_size()* 181
- snd_pcm_format_unsigned()* 7, 185
- snd_pcm_format_width()* 187
- snd_pcm_get_format_name()* 6, 189
- snd_pcm_info()* 193
- SND_PCM_INFO_CAPTURE 195
- SND_PCM_INFO_DUPLEX 195
- SND_PCM_INFO_DUPLEX_MONO 195
- SND_PCM_INFO_DUPLEX_RATE 195
- SND_PCM_INFO_PLAYBACK 195
- SND_PCM_INFO_SHARED 196
- SND_PCM_MODE_BLOCK 158, 162, 236, 238
- snd_pcm_nonblock_mode()* 19, 24, 197, 199, 202
- snd_pcm_open()* 13, 200
- SND_PCM_OPEN_CAPTURE 14, 199, 202
- SND_PCM_OPEN_DUPLEX 199
- SND_PCM_OPEN_PLAYBACK 14, 199, 202
- snd_pcm_open_preferred()* 13
- snd_pcm_playback_drain()* 21, 206
- snd_pcm_playback_flush()* 21, 208
- snd_pcm_playback_prepare()* 16, 18, 210
- snd_pcm_plugin_flush()* 21, 25, 212
- snd_pcm_plugin_info()* 15, 215
- snd_pcm_plugin_params()* 14, 18, 23, 217
- snd_pcm_plugin_playback_drain()* 21, 219
- snd_pcm_plugin_prepare()* 16, 18, 23, 221
- snd_pcm_plugin_read()* 23–25, 224
- snd_pcm_plugin_set_disable()* 228
- snd_pcm_plugin_setup()* 16, 33, 229
- snd_pcm_plugin_status()* 21, 26, 231
- snd_pcm_plugin_write()* 18–20, 233
- snd_pcm_read()* 23–25, 236
- SND_PCM_SFMT_* 6, 173, 175, 177, 179, 181, 183, 185, 187, 189
- SND_PCM_START_* 151
- SND_PCM_STATUS_NOTREADY 7, 15, 18, 23, 138, 148, 153, 162, 210, 217, 221
- SND_PCM_STATUS_OVERRUN 7, 23, 25, 163
- SND_PCM_STATUS_PAUSED 7, 163
- SND_PCM_STATUS_PREPARED 7, 16, 18, 23, 138, 153, 163, 210, 221
- SND_PCM_STATUS_READY 7, 15, 18, 23, 136, 148, 163, 206, 208, 212, 217, 219
- SND_PCM_STATUS_RUNNING 7, 18, 23, 138, 153, 163, 210, 221
- SND_PCM_STATUS_UNDERRUN 7, 18, 20, 163
- SND_PCM_STOP_* 151
- snd_pcm_write()* 18–20, 238
- snd_strerror()* 34, 241

sound cards *See* cards

states

about 7

capture 22

Not Ready 7, 15, 18, 23, 138,
148, 153, 162, 210, 217,
221

Overrun 7, 16, 23, 25, 163

rollover 151

Paused 7, 163

playback 17

Prepared 7, 16, 18, 23, 138,
153, 163, 210, 221

Ready 7, 15, 18, 23, 136, 148,
163, 206, 208, 212, 217,
219

Running 7, 18, 23, 138, 153,
163, 210, 221

Underrun 7, 16, 18, 20, 163
rollover 151

strerror() 241

strings for

data formats 6, 189

error codes 34, 241

subchannels 5

synchronizing

capture 25, 26

playback 20, 21

T

typographical conventions xiii

U

Underrun state 7, 16, 18, 20, 163
rollover 151